


Dimensions in inches, weight in pounds  
12 GROOVES, F = 13 7/8"

Part No.	Diameters		Type	Bush	Bush Max. Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch"8V"							
12 8V1250TB	12.50	12.30	A-1	5050	5	3 3/16	5	5 11/16	153
12 8V1320TB	13.20	13.00	A-1	5050	5	3	5	5 7/8	180
12 8V1400TB	14.00	13.80	A-1	5050	5	3 3/16	5	5 11/16	186
12 8V1500TB	15.00	14.80	A-2	5050	5	1 7/8	5	7	221
12 8V1600TB	16.00	15.80	A-2	5050	5	1 7/8	5	7	247
12 8V1700TB	17.00	16.80	A-2	5050	5	3 1/2	5	5 3/8	267
12 8V1800TB	18.00	17.80	A-2	5050	5	3 17/32	5	5 11/32	274
12 8V1900TB	19.00	18.80	A-2	5050	5	2 1/4	5	6 5/8	306
12 8V2000TB	20.00	19.80	A-3	5050	5	2 1/4	5	6 5/8	249
12 8V2120TB	21.20	21.00	A-3	5050	5	2 1/4	5	6 5/8	294
12 8V2240TB	22.40	22.20	A-3	5050	5	2 1/4	5	6 5/8	337
12 8V2480TB	24.80	24.60	A-3	5050	5	5 3/8	5	3 1/2	380
12 8V3000TB	30.00	29.80	A-3	6050	6	4	5	4 7/8	482
12 8V3550TB	35.50	35.30	A-3	6050	6	4	5	4 7/8	597
12 8V4000TB	40.00	39.80	A-3	6050	6	4	5	4 7/8	702
12 8V4450TB	44.50	44.30	A-3	6050	6	4	5	4 7/8	814
12 8V5300TB	53.00	52.80	A-3	7060	6	5	5	2 7/8	1077

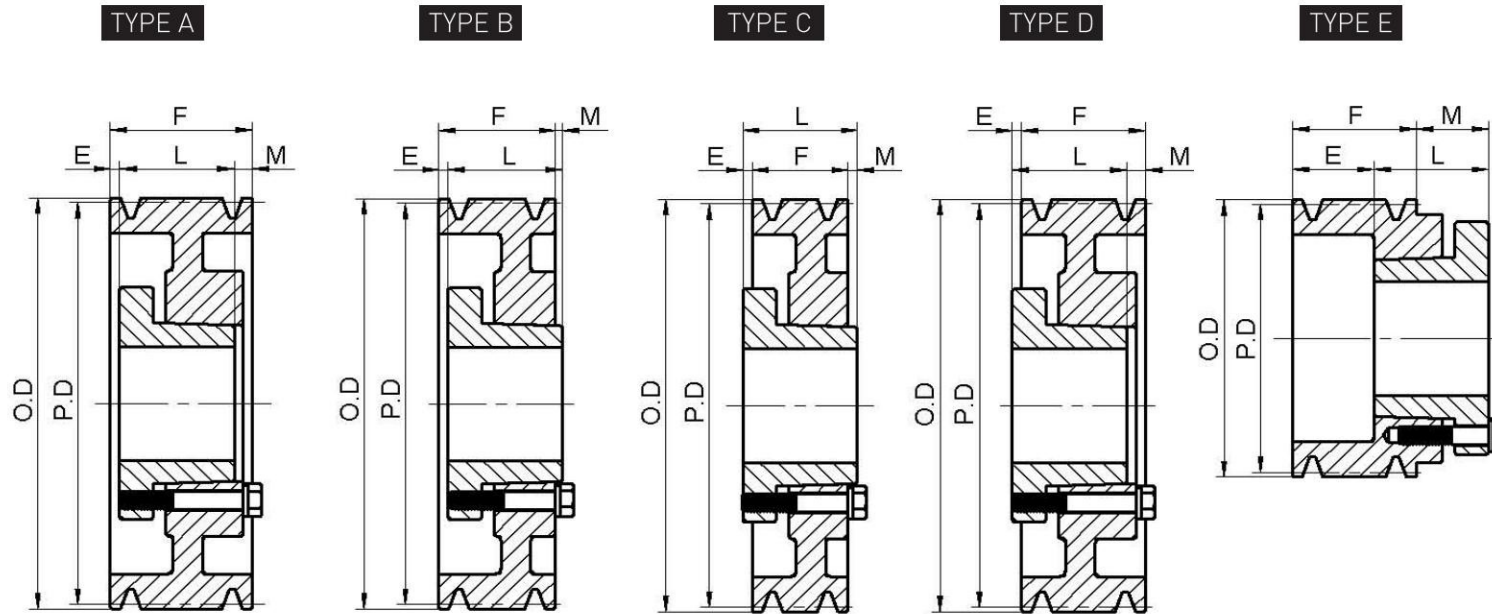

Standard Keyseats  
Table No.1

Bore Range	Keyseats
1" - 1 1/4"	1/4" x 1/8"
1 5/16 - 1 3/8	5/16 x 5/32
1 7/16 - 1 3/4	3/8 x 3/16
1 13/16 - 2 1/4	1/2 x 1/4
2 5/16 - 2 3/4	5/8 x 5/16
2 13/16 - 3 1/4	3/4 x 3/8
3 3/8 - 3 3/4	7/8 x 7/16
3 7/8 - 4 1/4	1 x 1/2
4 9/16 - 5 1/2	1 1/4 x 5/8
5 9/16 - 6 1/2	1 1/2 x 3/4
6 9/16 - 7	1 3/4 x 5/8

1 3/8" Bore Bushings also available with 3/8x3/16" Keyseats.

### Specifications

Table No.2

### 4 GROOVES, F = 4 7/8"

Part No.	Bushing	Bore Range	Type	P.D. "8V" Belts	O.D.	E	L	M	Wt. Less Bush.
48V1250F	F	1-4	D-Web	12.30	12.50	1/32	3 5/8	1 9/32	75
48V1320F	F	1-4	D-Web	13.00	13.20	1/32	3 5/8	1 9/32	81
48V1400F	F	1-4	D-Arm	13.80	14.00	1/32	3 5/8	1 9/32	87
48V1500F	F	1-4	D-Arm	14.80	15.00	1/32	3 5/8	1 9/32	91
48V1600F	F	1-4	D-Arm	15.80	16.00	1/32	3 5/8	1 9/32	96
48V1700F	F	1-4	D-Arm	16.80	17.00	1/32	3 5/8	1 9/32	104
48V1800F	F	1-4	D-Arm	17.80	18.00	1/32	3 5/8	1 9/32	114
48V1900F	F	1-4	D-Arm	18.80	19.00	1/32	3 5/8	1 9/32	121
48V2000J	J	1 1/2-4 1/2	D-Arm	19.80	20.00	0	4 5/8	1/4	136
48V2120J	J	1 1/2-4 1/2	D-Arm	21.00	21.20	0	4 5/8	1/4	145
48V2240J	J	1 1/2-4 1/2	D-Arm	22.20	22.40	0	4 5/8	1/4	154
48V2480M	M	2-5 1/2	C-Arm	24.60	24.80	13/16	6 3/4	1 1/16	176
48V3000M	M	2-5 1/2	C-Arm	29.80	30.00	13/16	6 3/4	1 1/16	224
48V3550M	M	2-5 1/2	C-Arm	35.30	35.50	13/16	6 3/4	1 1/16	267
48V4000M	M	2-5 1/2	C-Arm	39.80	40.00	13/16	6 3/4	1 1/16	310
48V4450M	M	2-5 1/2	C-Arm	44.30	44.50	13/16	6 3/4	1 1/16	363
48V5300M	M	2-5 1/2	C-Arm	52.80	53.00	13/16	6 3/4	1 1/16	437

### 5 GROOVES F = 6"

58V1250F	F	1-1/4	A-Web	12.30	12.50	1 3/32	3 5/8	1 9/32	82
58V1320F	F	1-1/4	A-Web	13.00	13.20	1 3/32	3 5/8	1 9/32	89
58V1400F	F	1-1/4	A-Arm	13.80	14.00	1 3/32	3 5/8	1 9/32	99
58V1500F	F	1-1/4	A-Arm	14.80	15.00	1 3/32	3 5/8	1 9/32	103
58V1600F	F	1-1/4	A-Arm	15.80	16.00	1 3/32	3 5/8	1 9/32	111
58V1700J	J	1 1/2 - 4 1/2	A-Arm	16.80	17.00	9/16	4 5/8	13/16	119
58V1800J	J	1 1/2 - 4 1/2	A-Arm	17.80	18.00	9/16	4 5/8	13/16	131
58V1900J	J	1 1/2 - 4 1/2	A-Arm	18.80	19.00	9/16	4 5/8	13/16	142
58V2000J	J	1 1/2 - 4 1/2	A-Arm	19.80	20.00	9/16	4 5/8	13/16	151
58V2120J	J	1 1/2 - 4 1/2	A-Arm	21.00	21.20	9/16	4 5/8	13/16	167
58V2240M	M	2 - 5 1/2	B-Arm	22.20	22.40	5/16	6 3/4	1 1/16	178
58V2480M	M	2 - 5 1/2	B-Arm	24.60	24.80	5/16	6 3/4	1 1/16	201
58V3000M	M	2 - 5 1/2	B-Arm	29.80	30.00	5/16	6 3/4	1 1/16	243
58V3550M	M	2 - 5 1/2	B-Arm	35.30	35.50	5/16	6 3/4	1 1/16	278
58V4000M	M	2 - 5 1/2	B-Arm	39.80	40.00	5/16	6 3/4	1 1/16	340
58V4450N	N	2 7/16 - 5 7/8	C-Arm	44.30	44.50	1	8 1/8	1 1/8	418
58V5300N	N	2 7/16 - 5 7/8	C-Arm	52.80	53.00	1	8 1/8	1 1/8	496

8V series



Specifications

Table No.3

6 GROOVES, F = 7 1/8"

Part No.	Bushing	Bore Range	Type	P.D. "5V"Belts	O.D.	E	L	M	Wt. Less Bush.
68V1250F	F	1-4	A-Web	12.30	12.50	1 3/32	3 5/8	2 13/32	90
68V1320F	F	1-4	A-Web	13.00	13.20	1 3/32	3 5/8	2 13/32	98
68V1400F	F	1-4	A-Arm	13.80	14.00	1 3/32	3 5/8	2 13/32	112
68V1500J	J	1 1/2 - 4 1/2	A-Web	14.80	15.00	1 1/8	4 5/8	1 3/8	123
68V1600J	J	1 1/2 - 4 1/2	A-Arm	15.80	16.00	1 1/8	4 5/8	1 3/8	129
68V1700J	J	1 1/2 " - 4 1/2"	A-Arm	16.80"	17.00"	1 1/8"	4 5/8"	1 3/8"	136
68V1800J	J	1 1/2 - 4 1/2	A-Arm	17.80	18.00	1 1/8	4 5/8	1 3/8	143
68V1900J	J	1 1/2 - 4 1/2	A-Arm	18.80	19.00	1 1/8	4 5/8	1 3/8	157
68V2000M	M	2 - 5 1/2	B-Arm	19.80	20.00	1 5/16	6 3/4	15/16	179
68V2120M	M	2 - 5 1/2	B-Arm	21.00	21.20	1 5/16	6 3/4	15/16	193
68V2240M	M	2 - 5 1/2	B-Arm	22.20	22.40	1 5/16	6 3/4	15/16	205
68V2480M	M	2 - 5 1/2	A-Arm	24.60	24.80	5/16	6 3/4	1/16	235
68V3000M	M	2 - 5 1/2	A-Arm	29.80	30.00	5/16	6 3/4	1/16	285
68V3550N	N	2 7/16 - 5 7/8	C-Arm	35.30	35.50	13/16	8 1/8	3/16	340
68V4000N	N	2 7/16 - 5 7/8	C-Arm	39.80	40.00	13/16	8 1/8	3/16	394
68V4450N	N	2 7/16 - 5 7/8	C-Arm	44.30	44.50	13/16	8 1/8	3/16	489
68V5300N	N	2 7/16 - 5 7/8	C-Arm	52.80	53.00	13/16	8 1/8	3/16	584

8 GROOVES, F = 9 3/8"

88V1250J	J	1 1/2 - 4 1/2	A-Sol.	12.30	12.50	2 1/8	4 5/8	2 5/8	131
88V1320J	J	1 1/2 - 4 1/2	A-Sol.	13.00	13.20	2 1/8	4 5/8	2 5/8	160
88V1400J	J	1 1/2 - 4 1/2	A-Web	13.80	14.00	2 1/8	4 5/8	2 5/8	175
88V1500J	J	1 1/2 - 4 1/2	A-Web	14.80	15.00	2 1/8	4 5/8	2 5/8	186
88V1600J	J	1 1/2 - 4 1/2	A-Web	15.80	16.00	2 1/8	4 5/8	2 5/8	210
88V1700M	M	2 - 5 1/2	A-Web	16.80	17.00	2 5/16	6 3/4	5/16	221
88V1800M	M	2 - 5 1/2	A-Web	17.80	18.00	2 5/16	6 3/4	5/16	235
88V1900M	M	2 - 5 1/2	A-Arm	18.80	19.00	2 5/16	6 3/4	5/16	250
88V2000M	M	2 - 5 1/2	A-Arm	19.80	20.00	2 5/16	6 3/4	5/16	265
88V2120M	M	2 - 5 1/2	A-Arm	21.00	21.20	2 5/16	6 3/4	5/16	280
88V2240M	M	2 - 5 1/2	A-Arm	22.20	22.40	2 5/16	6 3/4	5/16	295
88V2480N	N	2 7/16 - 5 7/8	A-Web	24.60	24.80	5/16	8 1/8	15/16	320
88V3000N	N	2 7/16 - 5 7/8	A-Arm	29.80	30.00	5/16	8 1/8	15/16	375
88V3550N	N	2 7/16 - 5 7/8	A-Arm	35.30	35.50	5/16	8 1/8	15/16	442
88V4000N	N	2 7/16 - 5 7/8	A-Arm	39.80	40.00	5/16	8 1/8	15/16	530
88V4450P	P	2 15/16 - 7	B-Arm	44.30	44.50	3/8	9 3/8	3/8	610
88V5300P	P	2 15/16 - 7	B-Arm	52.80	53.00	3/8	9 3/8	3/8	795
88V6300P	P	2 15/16 - 7	B-Arm	62.80	63.00	3/8	9 3/8	3/8	995

10 GROOVES, F = 11 5/8"

108V1250J	J	1 1/2 - 4 1/2	A-Sol.	12.30	12.50	2 1/8	4 5/8	4 7/8	155
108V1320J	J	1 1/2 - 4 1/2	A-Sol.	13.00	13.20	2 1/8	4 5/8	4 7/8	190
108V1400J	J	1 1/2 - 4 1/2	A-Sol.	13.80	14.00	2 1/8	4 5/8	4 7/8	210
108V1500M	M	2 - 5 1/2	A-Sol.	14.80	15.00	2 5/16	6 3/4	2 9/16	266
108V1600M	M	2 - 5 1/2	A-Web	15.80	16.00	2 5/16	6 3/4	2 9/16	256
108V1700M	M	2 - 5 1/2	A-Web	16.80	17.00	2 5/16	6 3/4	2 9/16	281
108V1800M	M	2 - 5 1/2	A-Web	17.80	18.00	2 5/16	6 3/4	2 9/16	290
108V1900M	M	2 - 5 1/2	A-Web	18.80	19.00	2 5/16	6 3/4	2 9/16	301
108V2000M	M	2 - 5 1/2	A-Web	19.80	20.00	2 5/16	6 3/4	2 9/16	325
108V2120M	M	2 - 5 1/2	A-Web	21.00	21.20	2 5/16	6 3/4	2 9/16	340
108V2240N	N	2 7/16 - 5 7/8	A-Web	22.20	22.40	5/16	8 1/8	3 3/16	365
108V2480N	N	2 7/16 - 5 7/8	A-Web	24.60	24.80	5/16	8 1/8	3 3/16	390
108V3000N	N	2 7/16 - 5 7/8	A-Arm	29.80	30.00	5/16	8 1/8	3 3/16	435
108V3550P	P	2 15/16 - 7	A-Arm	35.30	35.50	3/8	9 3/8	1 7/8	507
108V4000P	P	2 15/16 - 7	A-Arm	39.80	40.00	3/8	9 3/8	1 7/8	615
108V4450P	P	2 15/16 - 7	A-Arm	44.30	44.50	3/8	9 3/8	1 7/8	710
108V5300P	P	2 15/16 - 7	A-Arm	52.80	53.00	3/8	9 3/8	1 7/8	945


8V series

Table No.4

Specifications  
12 GROOVES, F = 13 7/8"

Part No.	Bushing	Bore Range	Type	P.D. "5V"Belts	O.D.	E	L	M	Wt. Less Bush.
128V1250M	M	2- 5 1/2	A-Sol.	12.30	12.50	2 5/16	6 3/4	4 13/16	195
128V1320M	M	2- 5 1/2	A-Sol.	13.00	13.20	2 5/16	6 3/4	4 13/16	230
128V1400M	M	2- 5 1/2	A-Sol.	13.80	14.00	2 5/16	6 3/4	4 13/16	250
128V1500M	M	2- 5 1/2	A-Sol.	14.80	15.00	2 5/16	6 3/4	4 13/16	268
128V1600M	M	2- 5 1/2	A-Sol.	15.80	16.00	2 5/16	6 3/4	4 13/16	296
128V1700M	M	2- 5 1/2	A-Sol.	16.80	17.00	2 5/16	6 3/4	4 13/16	341
128V1800M	M	2- 5 1/2	A-Sol.	17.80	18.00	2 5/16	6 3/4	4 13/16	345
128V1900N	N	2 7/16- 5 7/8	A-Sol.	18.80	19.00	5/16	8 1/8	5 7/16	352
128V2000N	N	2 7/16- 5 7/8	A-Web	19.80	20.00	5/16	8 1/8	5 7/16	385
128V2120N	N	2 7/16- 5 7/8	A-Web	21.00	21.20	5/16	8 1/8	5 7/16	400
128V2240N	N	2 7/16- 5 7/8	A-Web	22.20	22.40	5/16	8 1/8	5 7/16	435
128V2480N	N	2 7/16- 5 7/8	A-Web	24.60	24.80	5/16	8 1/8	5 7/16	460
128V3000P	P	2 15/16- 7	A-Arm	29.80	30.00	3/8	9 3/8	4 1/8	495
128V3550P	P	2 15/16- 7	A-Arm	35.30	35.50	3/8	9 3/8	4 1/8	572
128V4000P	P	2 15/16- 7	A-Arm	39.80	40.00	3/8	9 3/8	4 1/8	700
128V4450P	P	2 15/16- 7	A-Arm	44.30	44.50	3/8	9 3/8	4 1/8	825



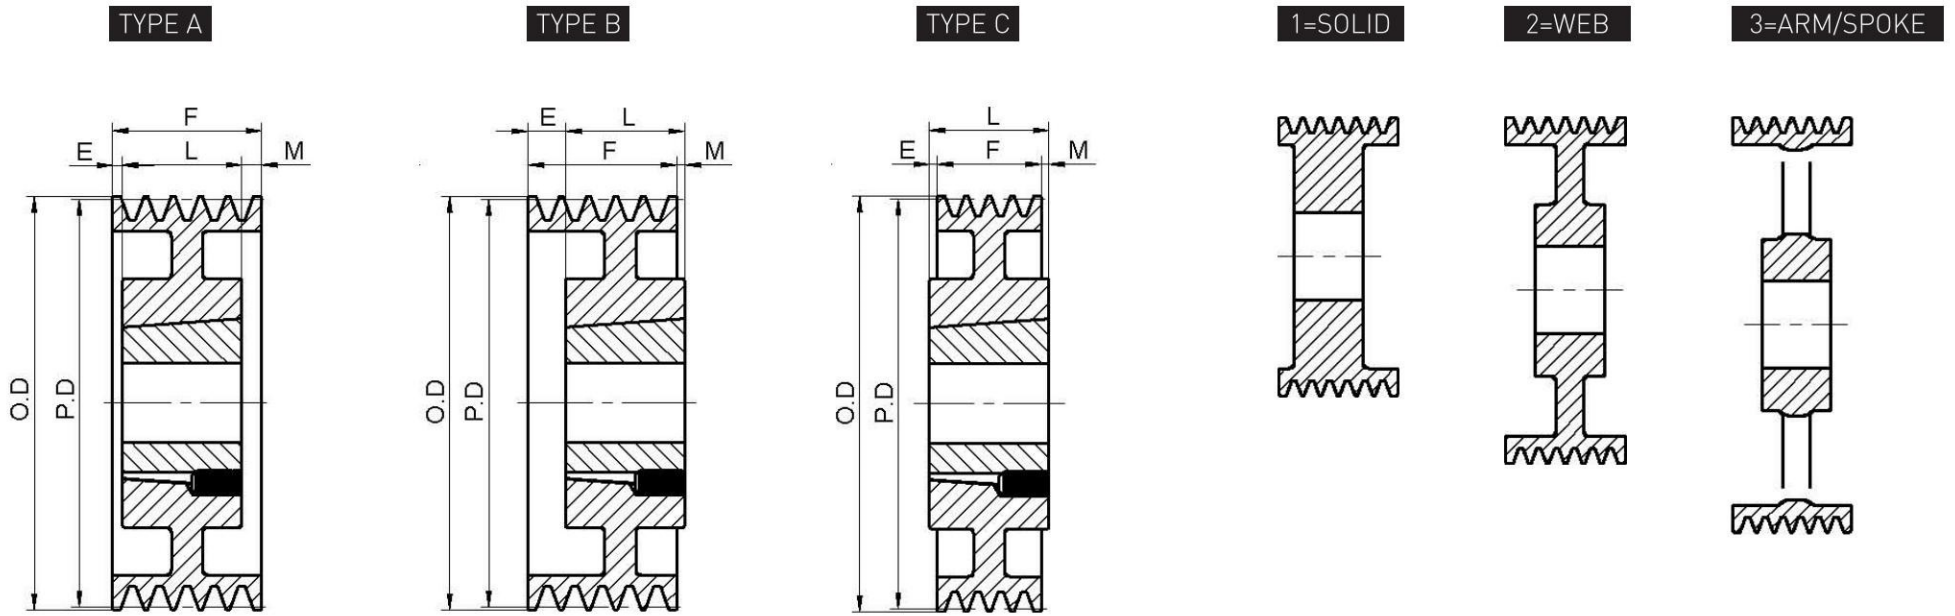


Dimensions in inches, weight in pounds

4 GROOVES, F = 4 7/8"

Part No.	Diameters		Type	Bush	Bush Max. Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch "8V"							
4 8V1250TB	12.50	12.30	A-1	4040	4	0	4	7/8	88.0
4 8V1320TB	13.20	13.00	A-1	4040	4	0	4	7/8	102.0
4 8V1400TB	14.00	13.80	A-1	4040	4	0	4	7/8	123.0
4 8V1500TB	15.00	14.80	A-1	4040	4	0	4	7/8	145.0
4 8V1600TB	16.00	15.80	A-2	4040	4	0	4	7/8	111.0
4 8V1700TB	17.00	16.80	A-2	4040	4	0	4	7/8	120.0
4 8V1800TB	18.00	17.80	A-2	4040	4	0	4	7/8	130.0
4 8V1900TB	19.00	18.80	A-2	4040	4	0	4	7/8	140.0
4 8V2000TB	20.00	19.80	A-2	4545	4 1/2	0	4 1/2	3/8	151.0
4 8V2120TB	21.20	21.00	A-3	4545	4 1/2	0	4 1/2	3/8	154.0
4 8V2240TB	22.40	22.20	A-3	4545	4 1/2	0	4 1/2	3/8	185.0
4 8V2480TB	24.80	24.60	C-3	5050	5	0	5	1/8	191
4 8V3000TB	30.00	29.80	C-3	5050	5	0	5	1/8	246.0
4 8V3550TB	35.50	35.30	C-3	5050	5	0	5	1/8	278
4 8V4000TB	40.00	39.80	C-3	5050	5	0	5	1/8	292.0
4 8V4450TB	44.50	44.30	C-3	5050	5	0	5	1/8	367
4 8V5300TB	53.00	52.80	C-3	5050	5	0	5	1/8	573.0


8V series

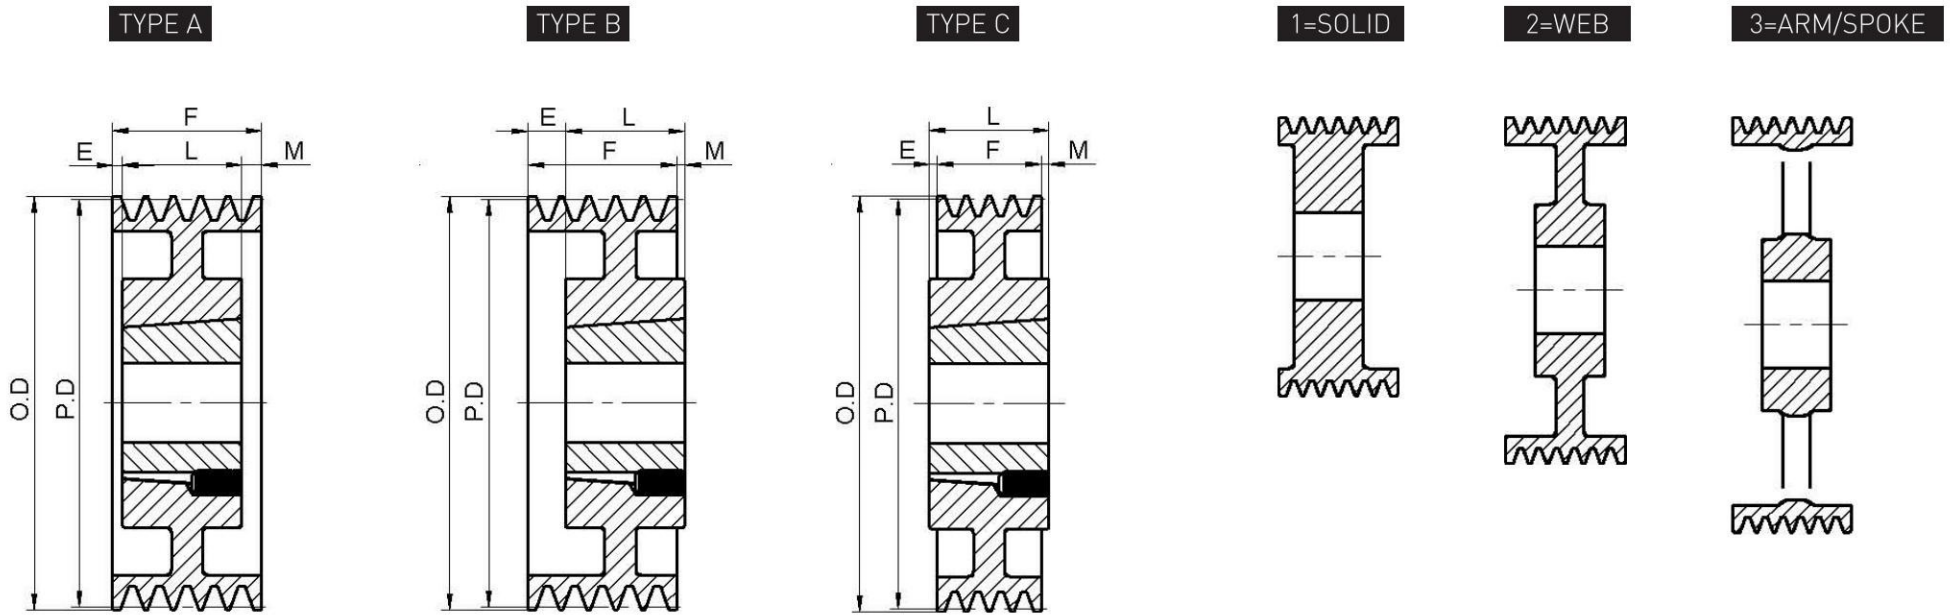

Dimensions in inches, weight in pounds

5 GROOVES, F = 6"

Part Number	Diameters		Type	Bush	Bush Max.Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch"8V"							
5 8V1250TB	12.50	12.30	A-1	4040	4	3/16	4	1 13/16	100.0
5 8V1320TB	13.20	13.00	A-1	4040	4	3/16	4	1 13/16	115.0
5 8V1400TB	14.00	13.80	A-1	4040	4	3/16	4	1 13/16	133.0
5 8V1500TB	15.00	14.80	A-1	4040	4	3/16	4	1 13/16	156.0
5 8V1600TB	16.00	15.80	A-1	4040	4	1/2	4	1 1/2	181.0
5 8V1700TB	17.00	16.80	A-2	4545	4 1/2	0	4 1/2	1 1/2	146.0
5 8V1800TB	18.00	17.80	A-2	4545	4 1/2	0	4 1/2	1 1/2	156.0
5 8V1900TB	19.00	18.80	A-2	4545	4 1/2	0	4 1/2	1 1/2	176.0
5 8V2000TB	20.00	19.80	A-2	4545	4 1/2	0	4 1/2	1 1/2	186.0
5 8V2120TB	21.20	21.00	A-3	4545	4 1/2	0	4 1/2	1 1/2	195.0
5 8V2240TB	22.40	22.20	A-3	4545	4 1/2	0	4 1/2	1 1/2	200.0
5 8V2480TB	24.80	24.60	A-3	5050	5	0	5	1 1/2	206
5 8V3000TB	30.00	29.80	A-3	5050	5	0	5	1	278.0
5 8V3550TB	35.50	35.30	A-3	5050	5	0	5	1	399
5 8V4000TB	40.00	39.80	A-3	5050	5	0	5	1	350.0
5 8V4450TB	44.50	44.30	A-3	5050	5	0	5	1	572
5 8V5300TB	53.00	52.80	A-3	5050	5	0	5	1	565.0

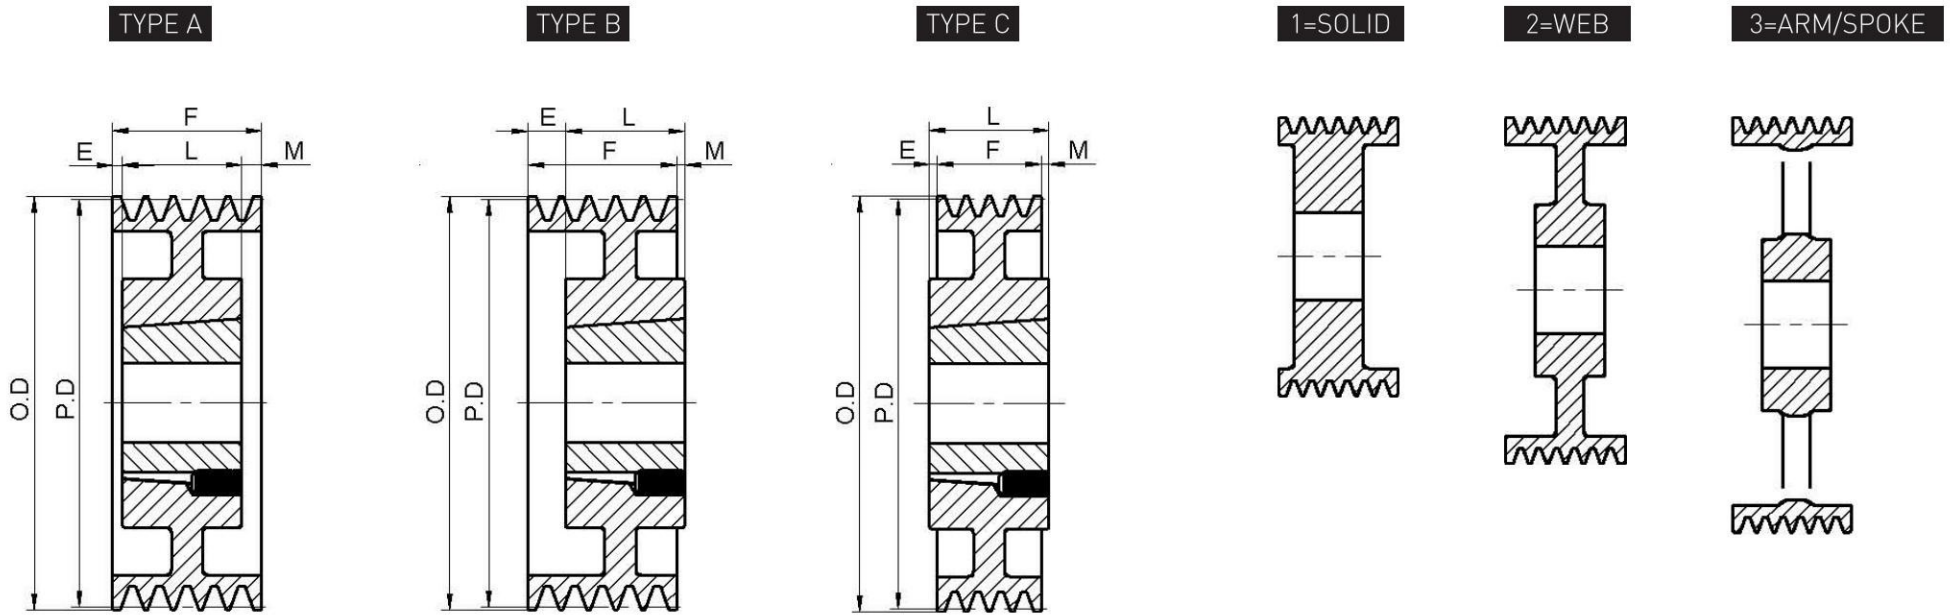


Dimensions in inches, weight in pounds

6 GROOVES, F = 7 1/8"

Part No.	Diameters		Type	Bush	Bush Max. Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch"8V"							
6 8V1250TB	12.50	12.30	A-1	4040	4	1	4	2 1/8	100.0
6 8V1320TB	13.20	13.00	A-1	4040	4	1	4	2 1/8	124.0
6 8V1400TB	14.00	13.80	A-1	4545	4 1/2	1/2	4 1/2	2 1/8	142.0
6 8V1500TB	15.00	14.80	A-1	4545	4 1/2	1/2	4 1/2	2 1/8	153.0
6 8V1600TB	16.00	15.80	A-2	4545	4 1/2	1/2	4 1/2	2 1/8	170.0
6 8V1700TB	17.00	16.80	A-2	4545	4 1/2	1/2	4 1/2	2 1/8	175.0
6 8V1800TB	18.00	17.80	A-2	4545	4 1/2	1/2	4 1/2	2 1/8	180.0
6 8V1900TB	19.00	18.80	A-2	4545	4 1/2	1/2	4 1/2	2 1/8	182.0
6 8V2000TB	20.00	19.80	A-2	5050	5	1/2	5	1 5/8	226.0
6 8V2120TB	21.20	21.00	A-3	5050	5	1/2	5	1 5/8	246.0
6 8V2240TB	22.40	22.20	A-3	5050	5	1/2	5	1 5/8	267.0
6 8V2480TB	24.80	24.60	A-3	5050	5	1/8	5	2 1/4	236
6 8V3000TB	30.00	29.80	A-3	5050	5	1/2	5	1 5/8	398.0
6 8V3550TB	35.50	35.30	A-3	5050	5	1/2	5	1 5/8	363
6 8V4000TB	40.00	39.80	A-3	5050	5	1/2	5	1 5/8	468.0
6 8V4450TB	44.50	44.30	A-3	5050	5	1/2	5	1 5/8	485
6 8V5300TB	53.00	52.80	A-3	5050	5	1/2	5	1 5/8	658.0

8V series




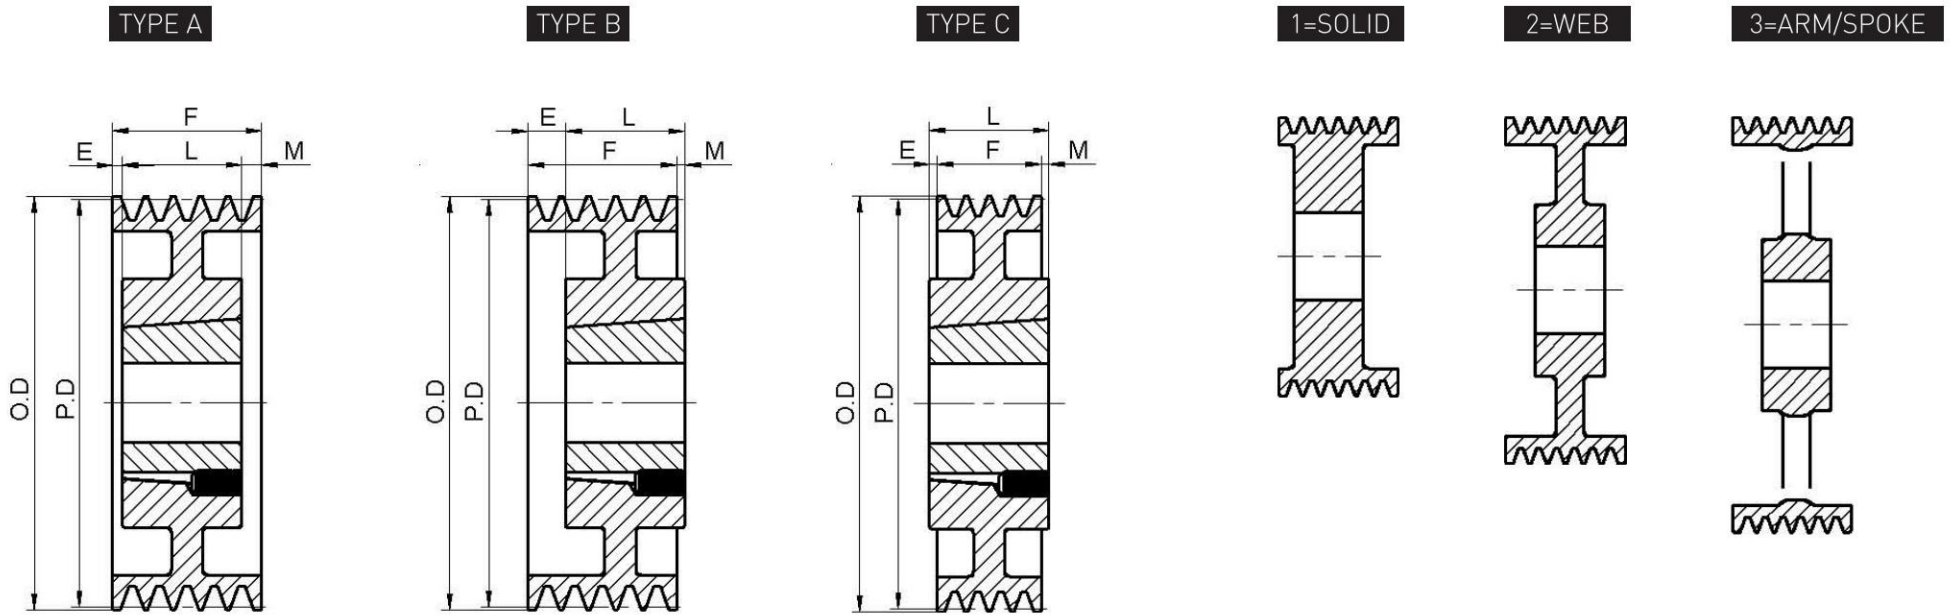

Dimensions in inches, weight in pounds  
8 GROOVES, F = 9 3/8"

Part Number	Diameters		Type	Bush	Bush Max. Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch "8V"							
8 8V1250TB	12.50	12.30	A-1	4545	4 1/2	1 1/2	4 1/2	3 3/8	125.0
8 8V1320TB	13.20	13.00	A-1	4545	4 1/2	1 1/2	4 1/2	3 3/8	135.0
8 8V1400TB	14.00	13.80	A-1	4545	4 1/2	1 1/2	4 1/2	3 3/8	156.0
8 8V1500TB	15.00	14.80	A-1	4545	4 1/2	1 1/2	4 1/2	3 3/8	160.0
8 8V1600TB	16.00	15.80	A-2	4545	4 1/2	1 1/2	4 1/2	3 3/8	166.0
8 8V1700TB	17.00	16.80	A-2	5050	5	1	5	3 3/8	265.0
8 8V1800TB	18.00	17.80	A-2	5050	5	1	5	3 3/8	204.0
8 8V1900TB	19.00	18.80	A-2	5050	5	1	5	3 3/8	228.0
8 8V2000TB	20.00	19.80	A-2	5050	5	1	5	3 3/8	234.0
8 8V2120TB	21.20	21.00	A-3	5050	5	1	5	3 3/8	246.0
8 8V2240TB	22.40	22.20	A-3	5050	5	1	5	3 3/8	300.0
8 8V2480TB	24.80	24.60	A-3	5050	5	1	5	3 3/8	285
8 8V3000TB	30.00	29.80	A-3	5050	5	1	5	3 3/8	384.0
8 8V3550TB	35.50	35.30	A-3	5050	5	1	5	3 3/8	441
8 8V4000TB	40.00	39.80	A-3	5050	5	1	5	3 3/8	556.0
8 8V4450TB	44.50	44.30	A-3	6050	6	1	5	3 3/8	596
8 8V5300TB	53.00	52.80	A-3	6050	6	1	5	3 3/8	1040.0



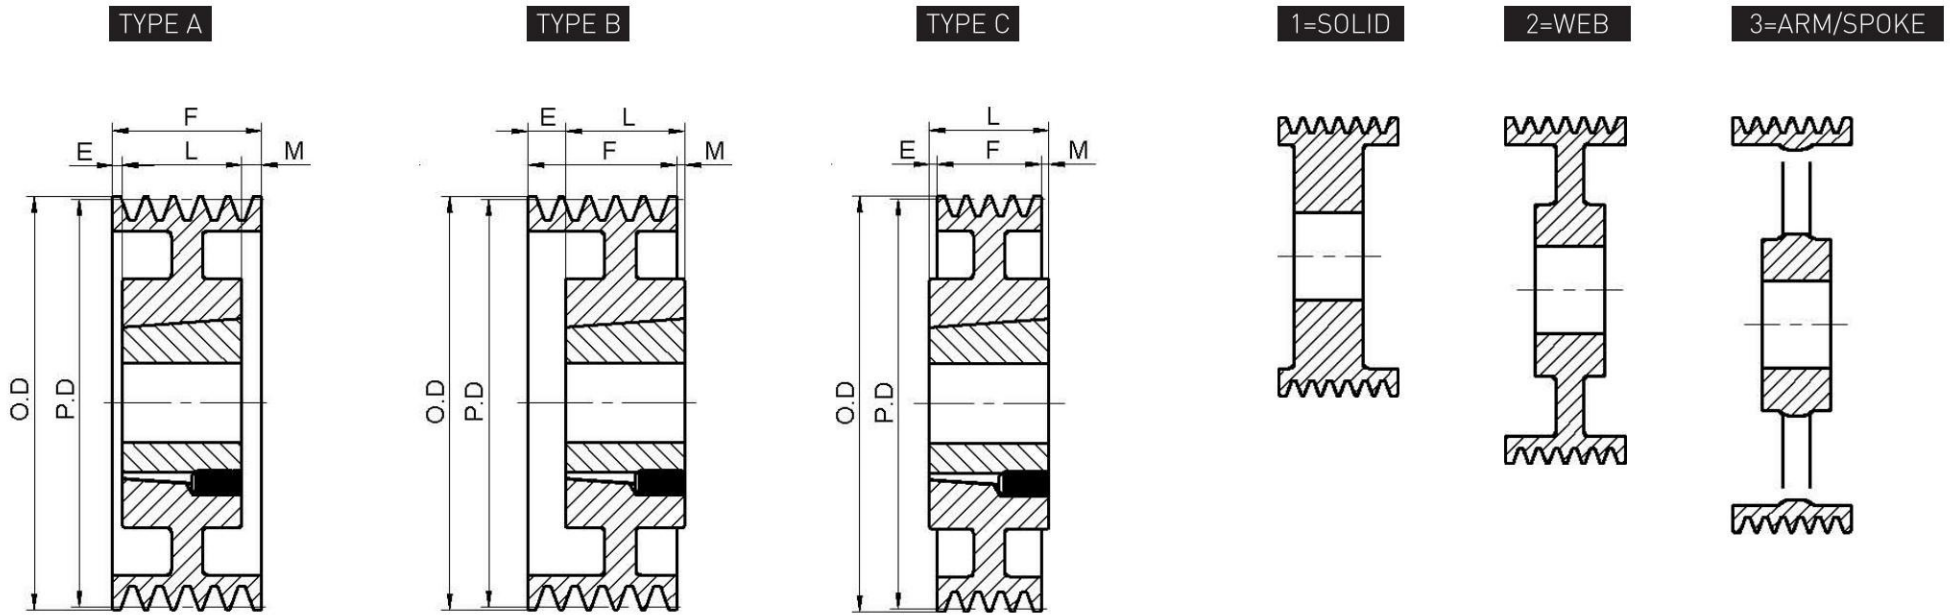

Dimensions in inches, weight in pounds

10 GROOVES, F = 11 5/8"

Part No.	Diameters		Type	Bush	Bush Max. Bore	E	L Thru Bore	M	Wt. Less Bush.
	O.D.	Pitch "8V"							
10 8V1320TB	13.20	13.00	A-1	4545	4 1/2	1	4 1/2	6 1/8	150.0
10 8V1400TB	14.00	13.80	A-1	4545	4 1/2	1	4 1/2	6 1/8	180.0
10 8V1500TB	15.00	14.80	A-1	5050	5	1	5	5 5/8	211.0
10 8V1600TB	16.00	15.80	A-1	5050	5	1	5	5 5/8	220.0
10 8V1700TB	17.00	16.80	A-2	5050	5	2 1/4	5	4 3/8	228.0
10 8V1800TB	18.00	17.80	A-2	5050	5	2 1/4	5	4 3/8	244.0
10 8V1900TB	19.00	18.80	A-2	5050	5	2 1/4	5	4 3/8	260.0
10 8V2000TB	20.00	19.80	A-2	5050	5	2 1/4	5	4 3/8	270.0
10 8V2120TB	21.20	21.00	A-2	5050	5	2 1/4	5	4 3/8	282.0
10 8V2240TB	22.40	22.20	A-3	5050	5	2 1/4	5	4 3/8	312.0
10 8V2480TB	24.80	24.60	A-3	5050	5	2 1/4	5	4 3/8	328.0
10 8V2800TB	28.00	27.80	A-3	5050	5	2 1/4	5	4 3/8	380.0
10 8V3000TB	30.00	29.80	A-3	5050	5	2 1/4	5	4 3/8	448.0
10 8V3150TB	31.50	31.30	A-3	5050	5	2 1/4	5	4 3/8	480.0
10 8V3550TB	35.50	35.30	A-3	5050	5	2 1/4	5	4 3/8	517.0
10 8V4000TB	40.00	39.80	A-3	6050	6	2 1/4	5	4 3/8	550.0
10 8V4450TB	44.50	44.30	A-3	6050	6	2 1/4	5	4 3/8	701.0
10 8V5300TB	53.00	52.80	A-3	6050	6	2 1/4	5	4 3/8	870.0

8V series