




用于玉米秸秆类作物的拨禾、喂入、提升等用途
Using for picking, feeding and hoisting for corn stalk crops and so on

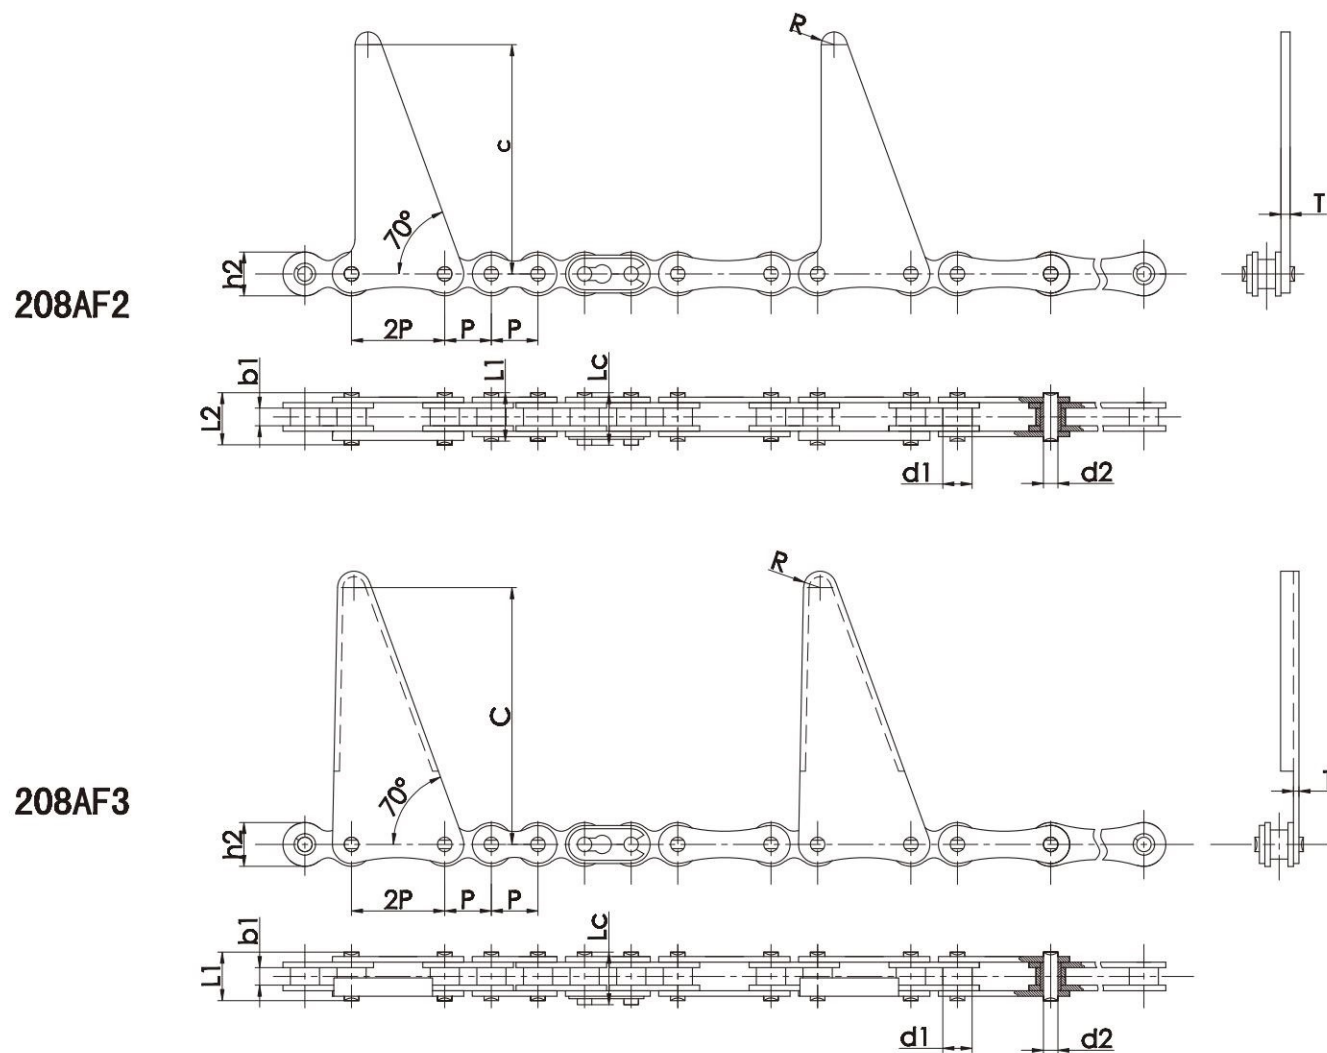


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length			内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸		极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d ₁ max	b ₁ min	d ₂ max	L ₁ max	L ₂ max	L _c max	h ₂ max	T max	C	R	Q _{min}	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
208AF2	12.7	7.95	4.80	3.96	13.1	14.7	14.5	12.0	2.4	56.5	3.5	13.8/3136	16.0
208AF3	12.7	7.95	4.80	3.96	13.1	—	14.5	12.0	1.5	60.5	4.5	13.8/3136	16.0
208AF3A	12.7	7.95	7.85	3.96	16.6	—	17.8	12.0	1.5	60.5	4.5	13.8/3136	16.0

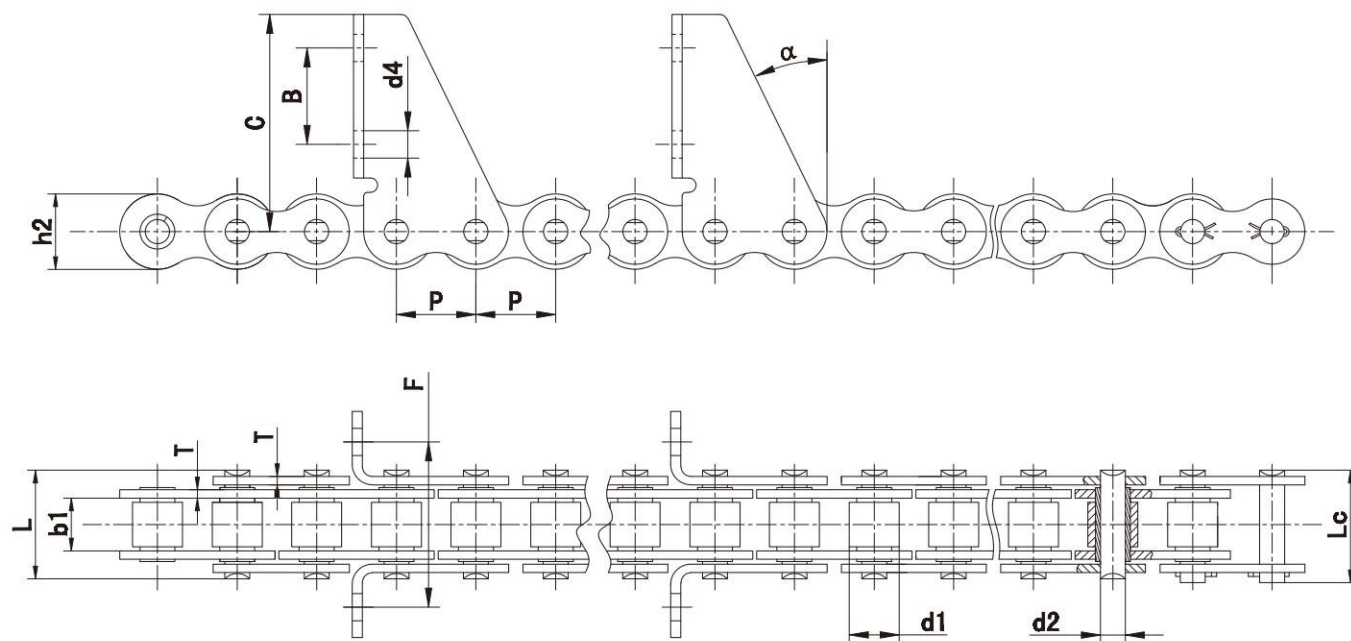


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸					极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	h ₂ max	T max	C	B	d ₄	α	F	Q _{min}	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	mm	kN/LB	kN
12AF4	19.05	11.91	12.57	5.94	25.9	28.1	18.0	2.42	51.8	23.0	6.5	26°	38.0	31.8/7227	41.5

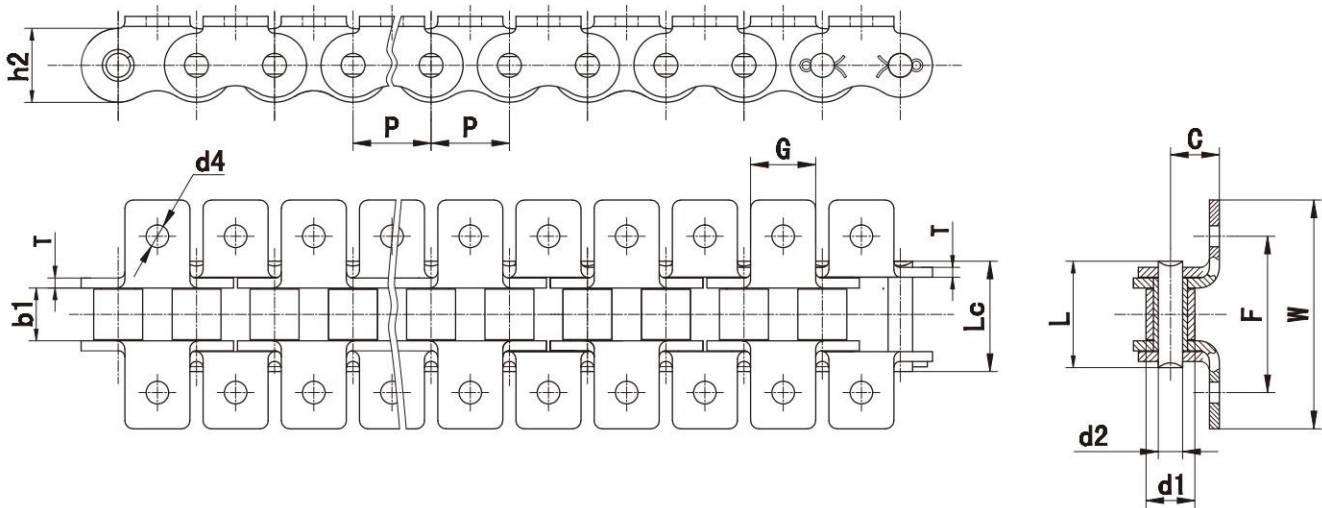


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸					极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	G	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
12AK1	19.05	11.91	12.57	5.94	25.9	28.1	18.0	2.42	11.9	55.6	38.1	15.8	5.5	31.8/7227	41.5
12BK1	19.05	12.07	11.68	5.72	22.7	24.2	16.13	1.85	12.2	50.4	35.2	18.0	6.4	29/6591	32.7

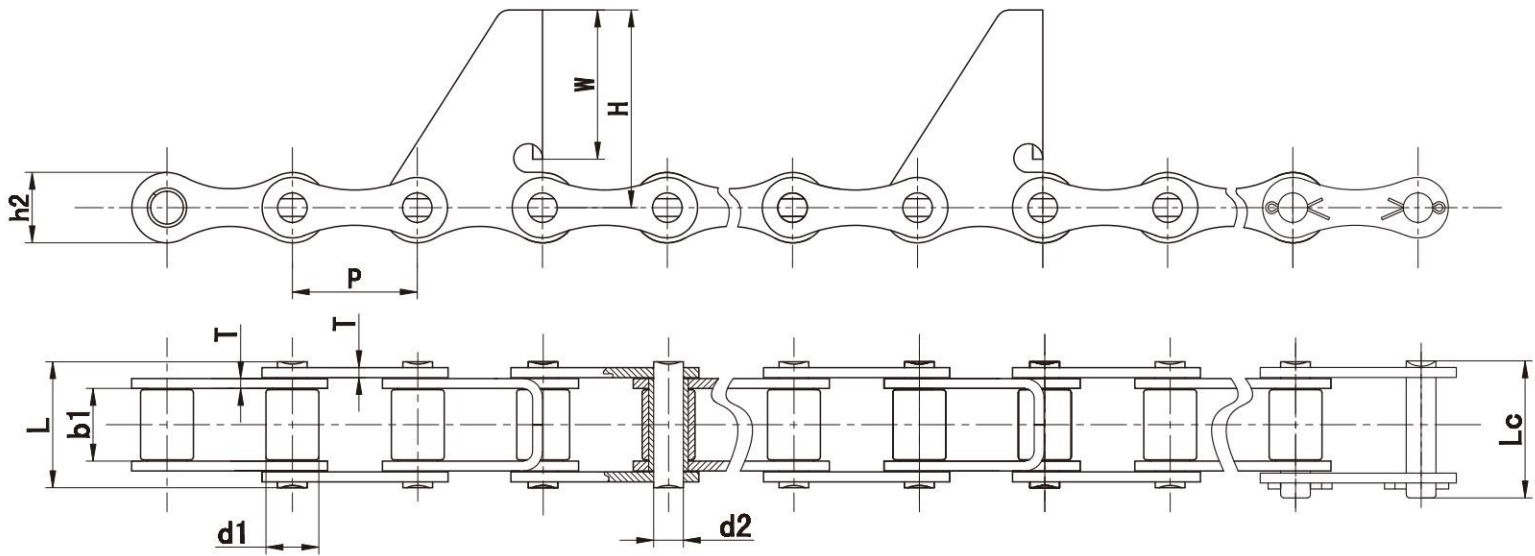


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸		极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	W	H	Q min	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38F1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	45.3	60.0	40.0/9091	55.3

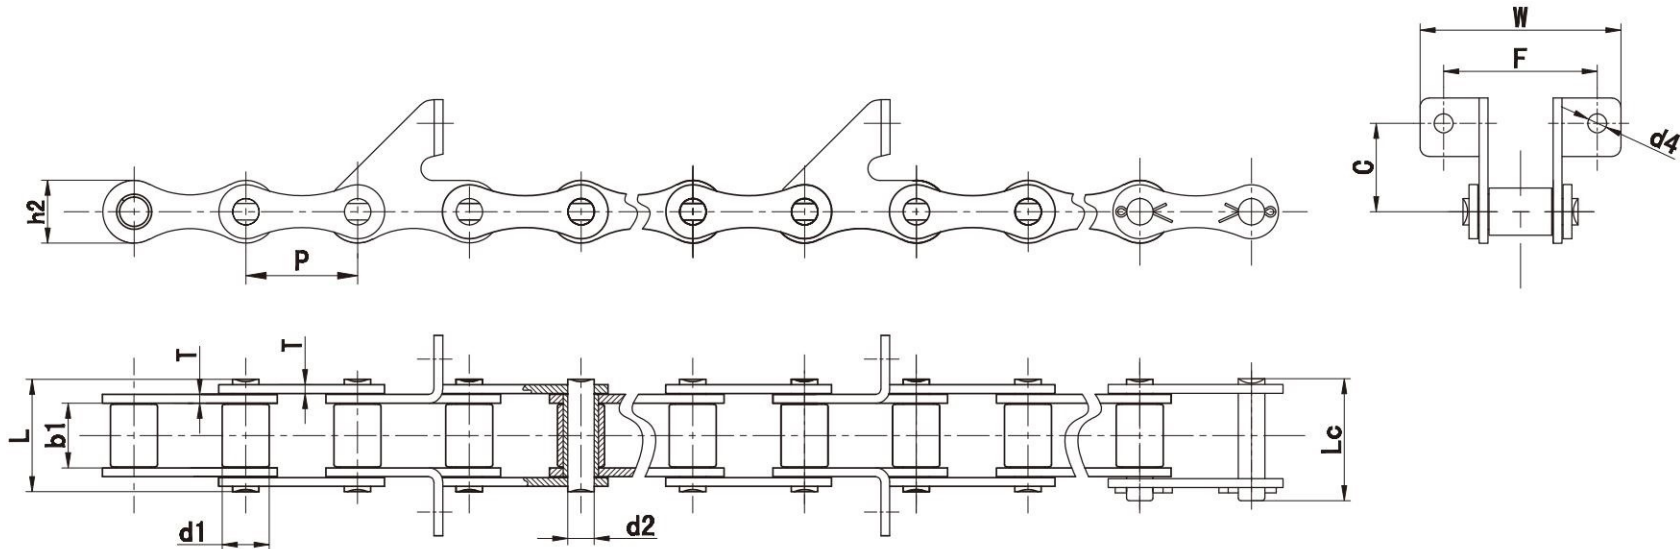


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38F2	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	30.0	68.0	52.0	6.5	40.0/9091	55.3

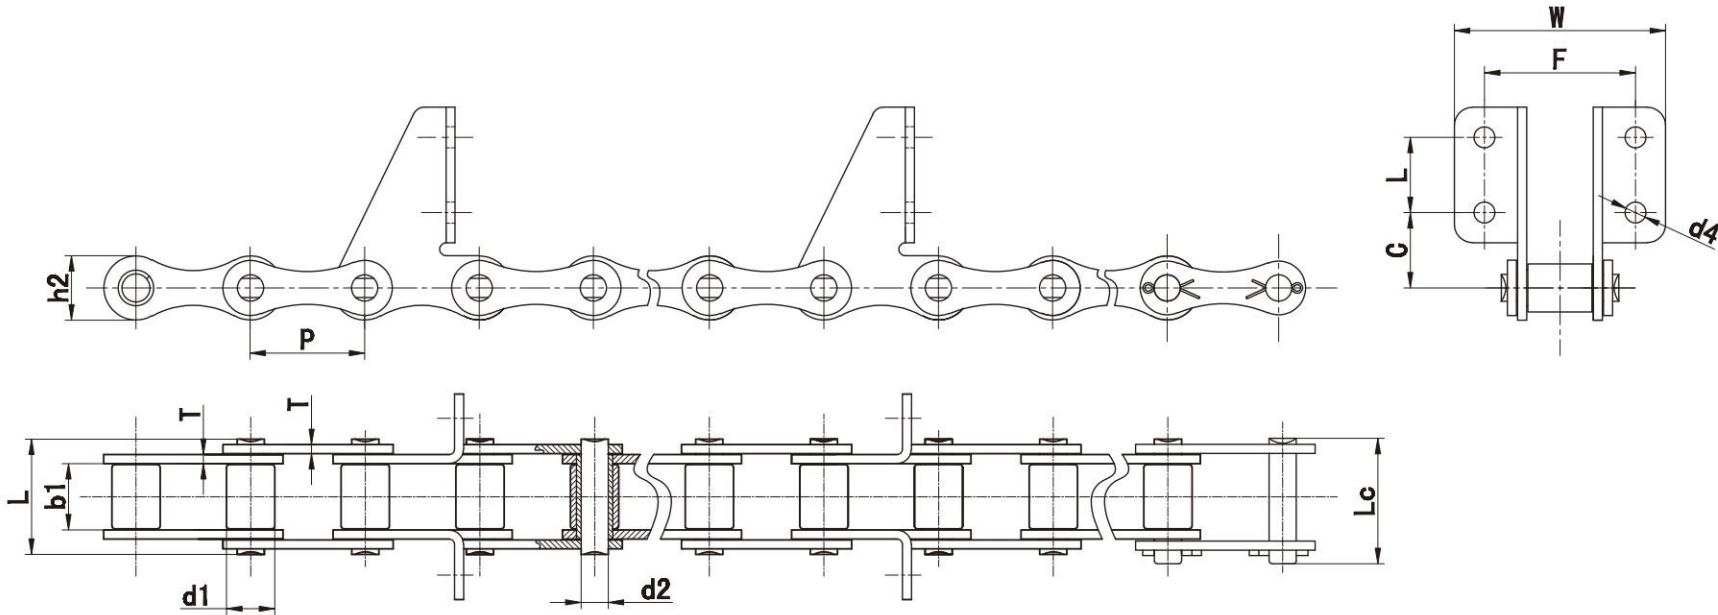


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸					极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	L	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38F3	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	25.0	25.0	70.0	50.0	7.0	40.0/9091	55.3
GS38F4	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	32.0	25.0	68.0	52.0	7.0	40.0/9091	55.3
GS38F6	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	30.0	—	70.0	52.0	8.5	40.0/9091	55.3

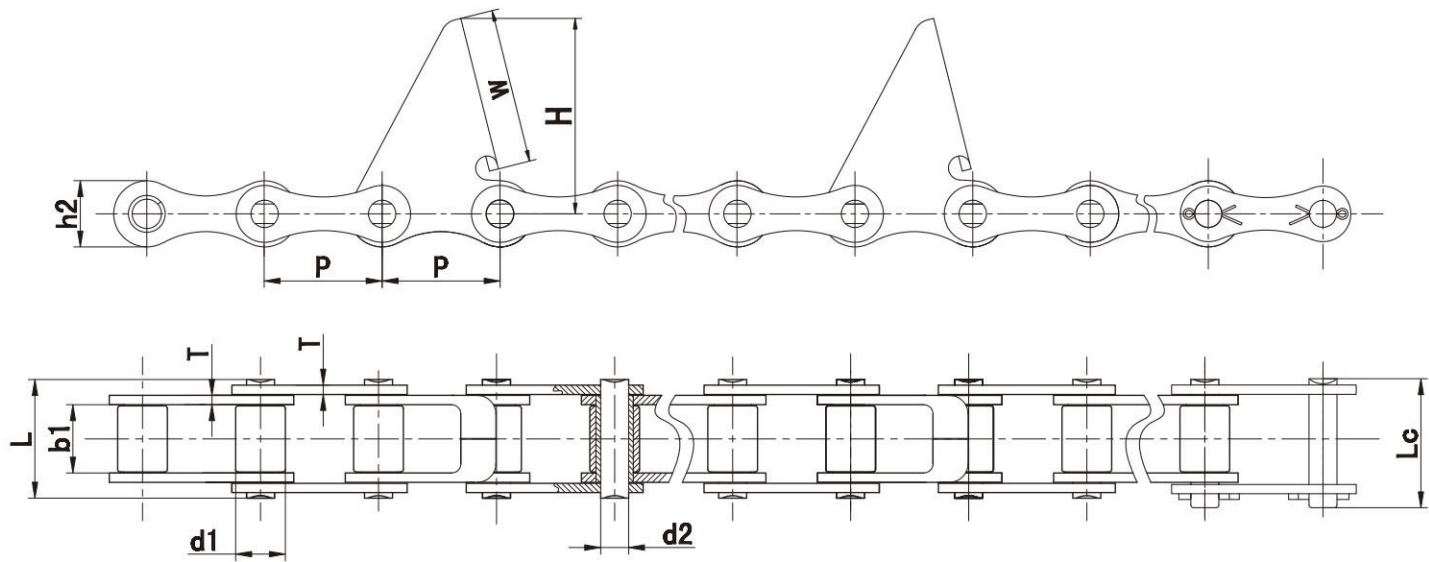


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸		极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	W	H	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38F5	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	50.0	62.0	40.0/9091	55.3

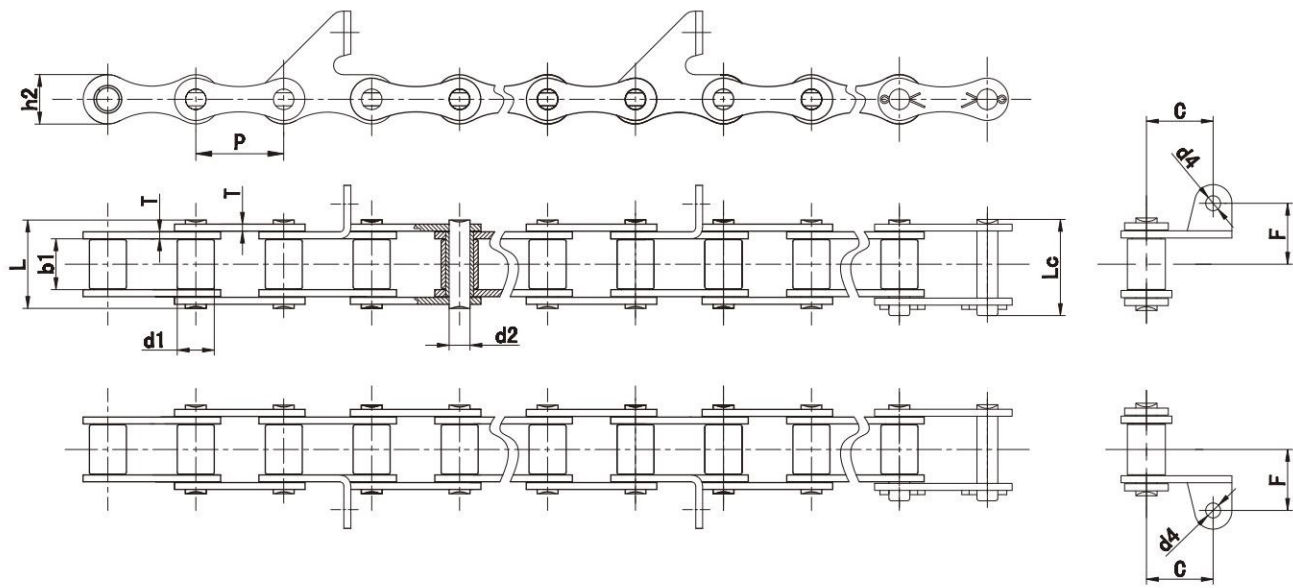


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸			极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38Ld1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	30.0	26.0	6.5	40.0/9091	55.3
GS38Ld1A	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	30.0	26.0	8.5	40.0/9091	55.3

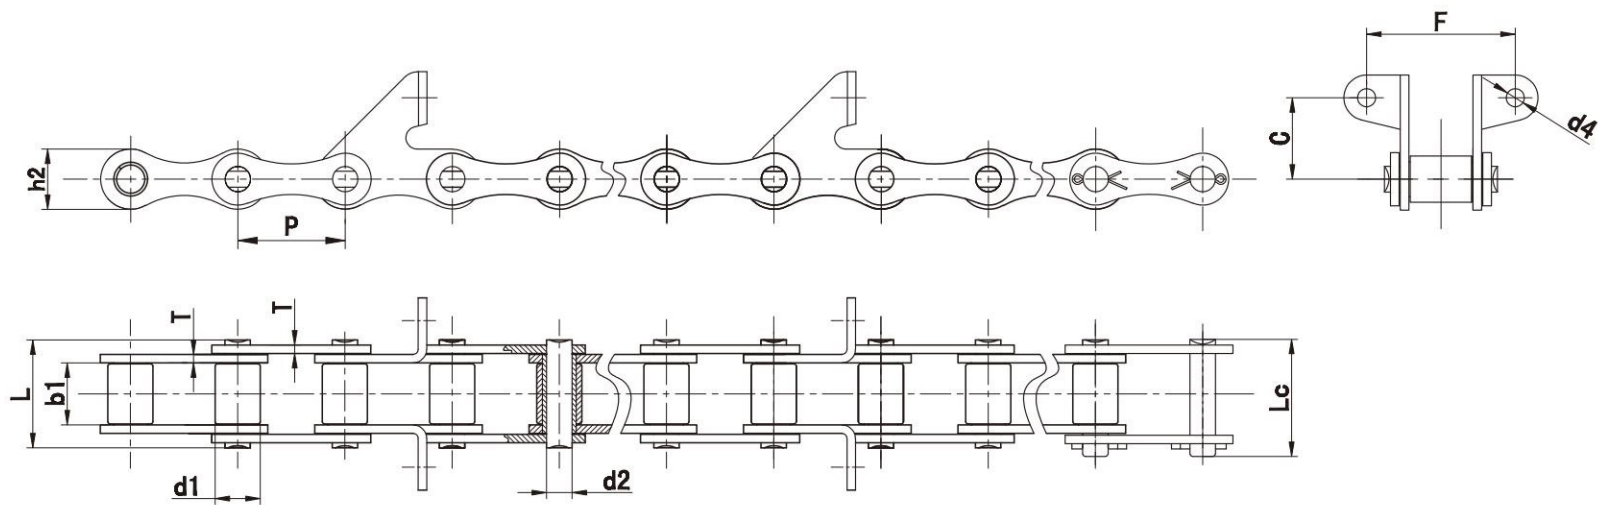


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between InnerPlates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸			极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38Ld2	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	30.0	52.0	6.5	40.0/9091	55.3

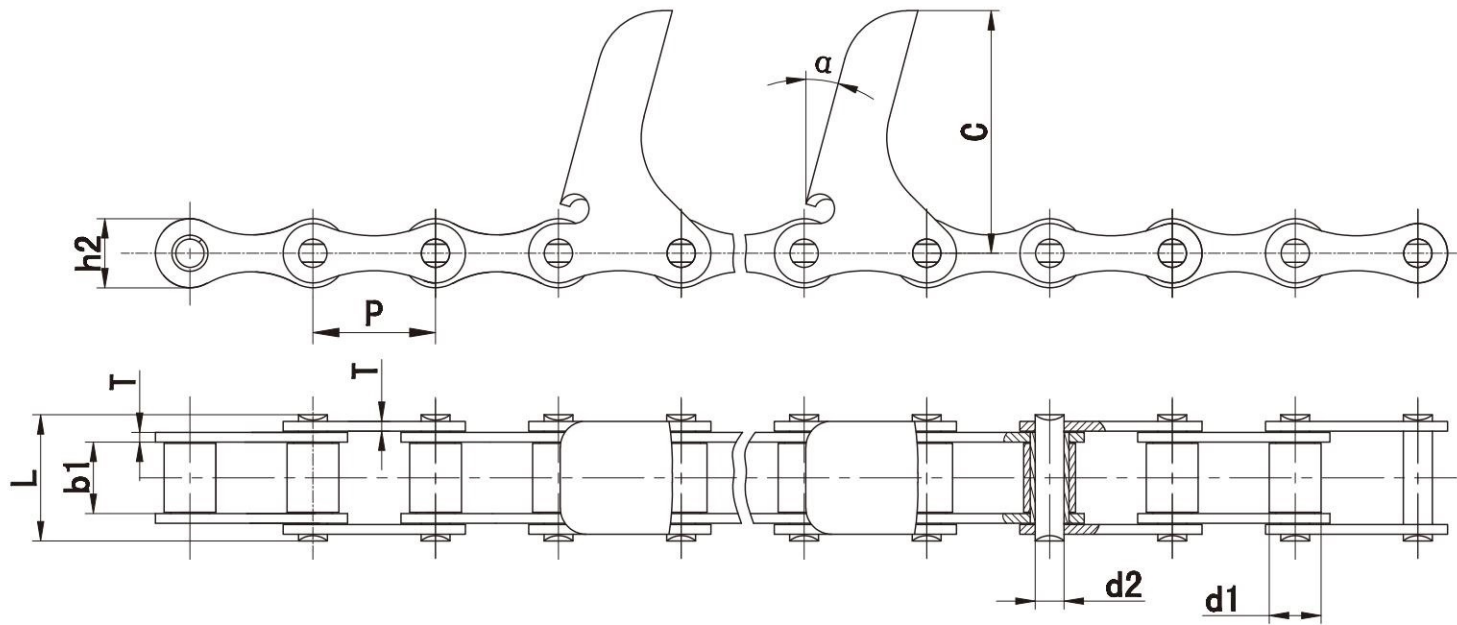


节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸			极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	h2 max	T max	C	α	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38C6E(62)	38.0	16.0	22.0	9.0	39.0	21.5	3.0	62.0	15°	40.0/9091	55.3

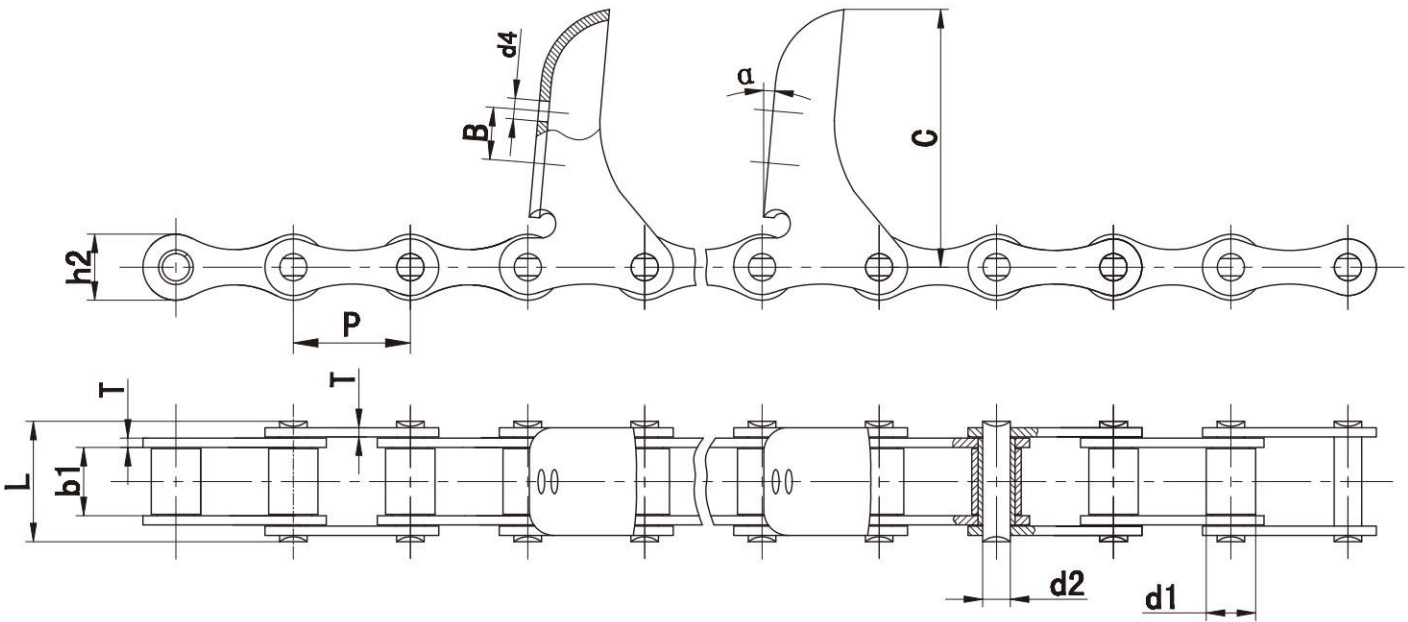


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	h2 max	T max	C	α	B	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38C6E(75)	38.0	16.0	22.0	9.0	39.0	21.5	3.0	75.0	5°	15.0	6.0	40.0/9091	55.3

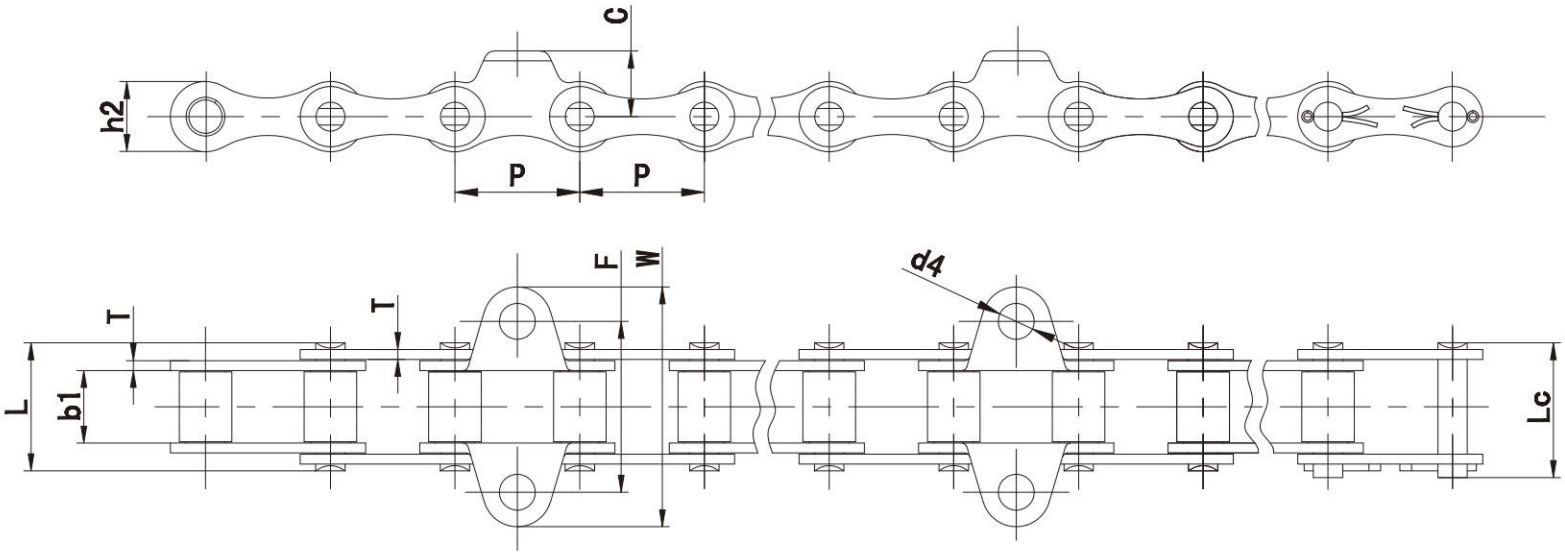


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38K1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	20.0	73.0	52.0	11.2	40.0/9091	55.3

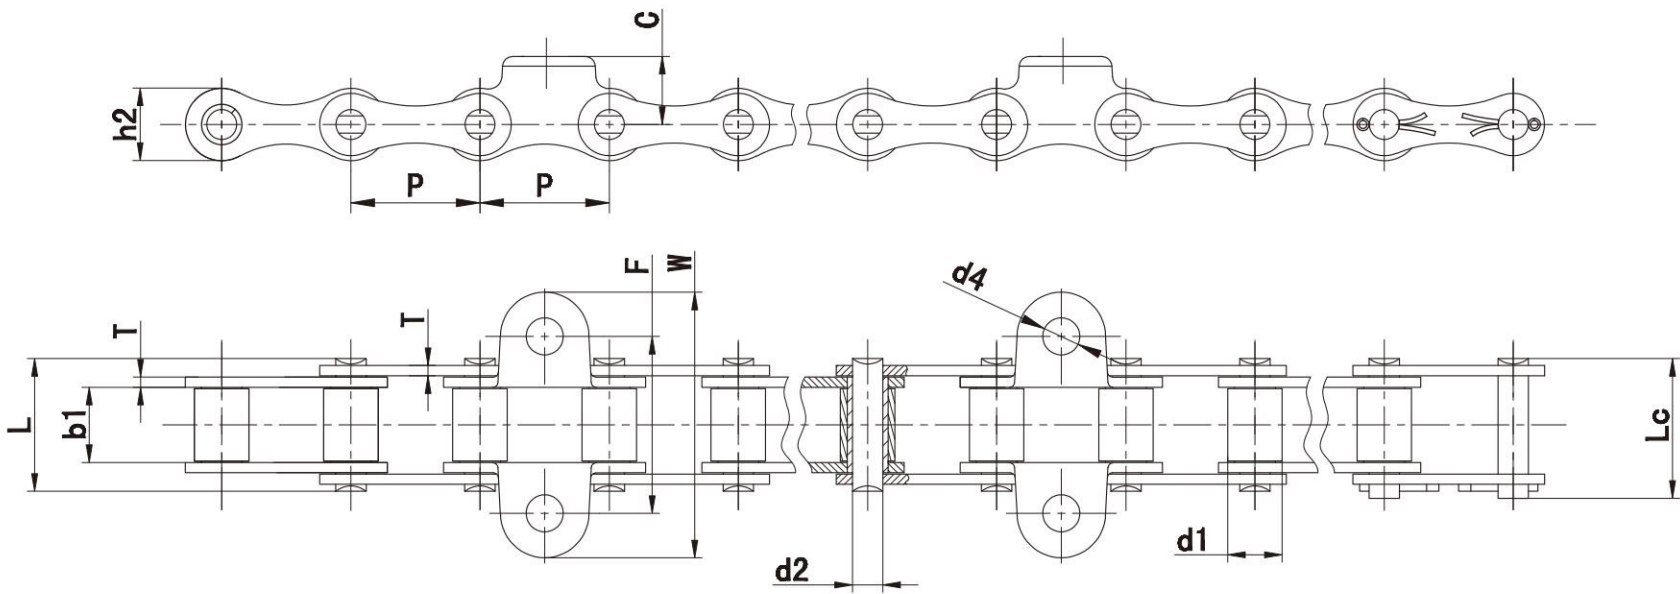

Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38K1d1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	20.0	78.0	52.0	11.2	40.0/9091	55.3

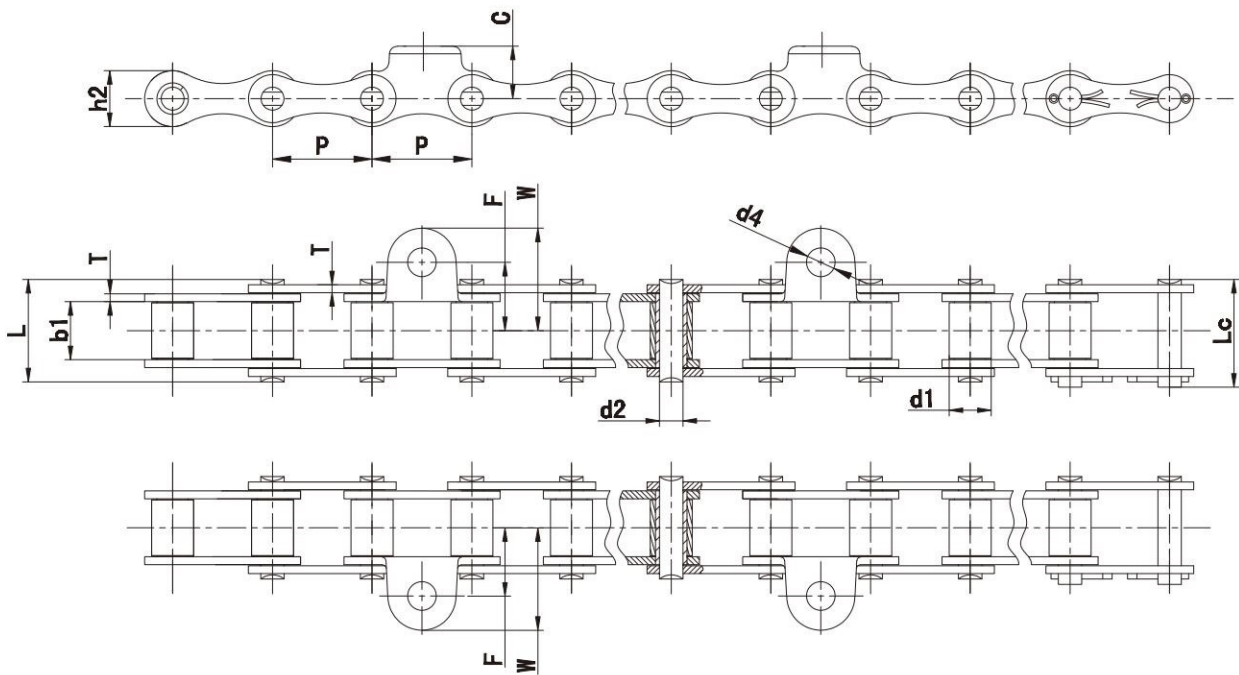


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38NA1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	20.0	39.0	26.0	11.2	40.0/9091	55.3

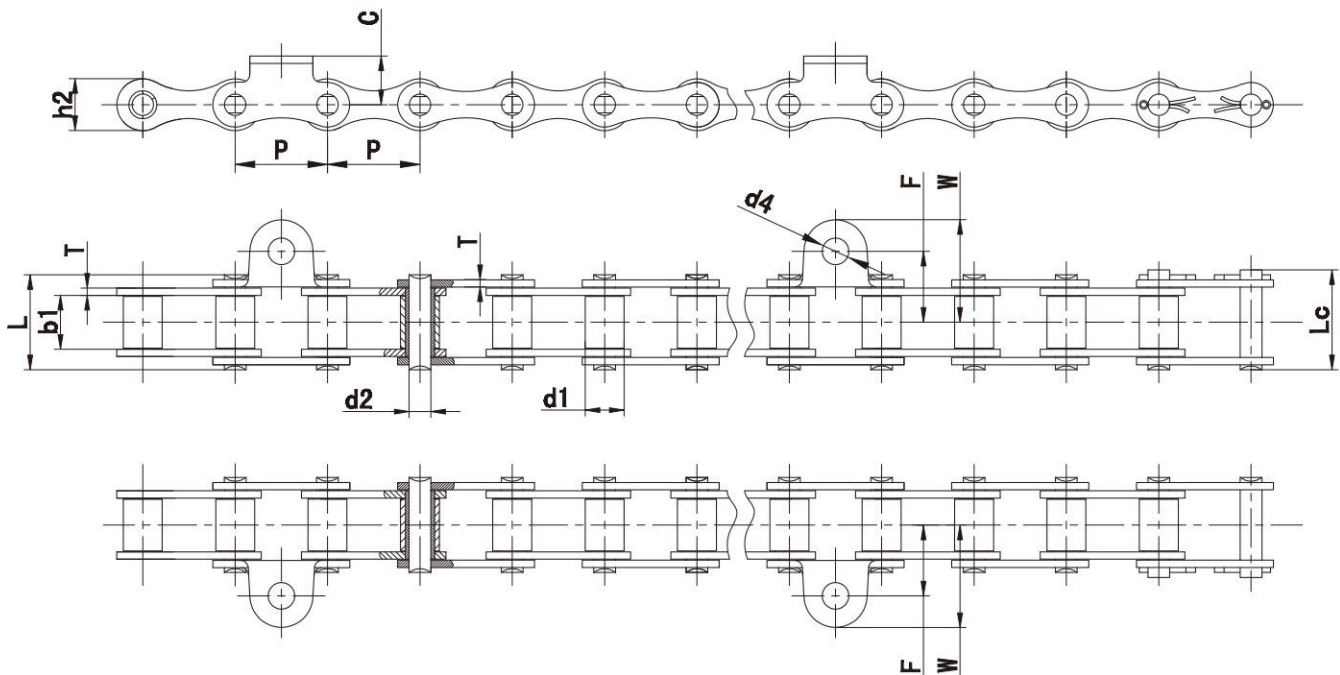


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	C	W	F	d4	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
GS38WA1	38.0	16.0	22.0	9.0	39.0	42.0	21.5	3.0	20.0	42.2	29.0	11.2	40.0/9091	55.3

C210AF1

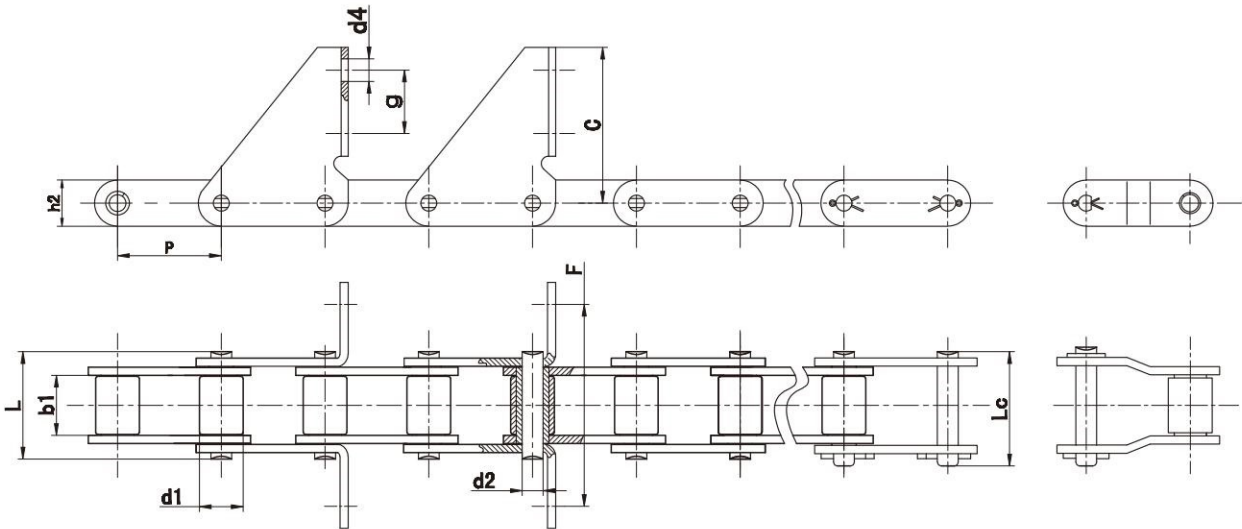

C212AF1

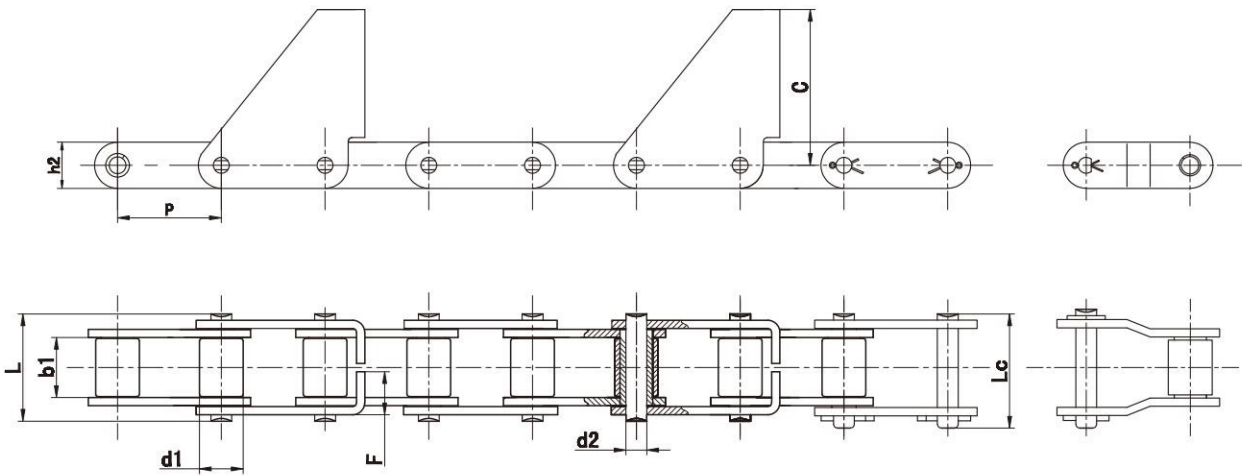

Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	附板尺寸 Attachment Dimensionss				极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	F	C	d4	g	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
C210AF1	31.75	10.16	9.40	5.08	20.7	23.3	15.0	35.2	54.0	7.0	23.0	21.8/4955	28.5
C212AF1	38.10	11.91	12.57	5.94	25.9	28.3	18.0	10.92	56.0	-	-	31.1/7068	38.7