



用于水稻的喂入、排草等用途，CHOHO水稻链采用了具有专利技术的表面防锈处理工艺，其防锈性能大大提高


Using for feeding and weeding for rice and so on. CHOHO rice chain are treated with surface rust treatment with patented technology, its anti-rust properties are greatly improved

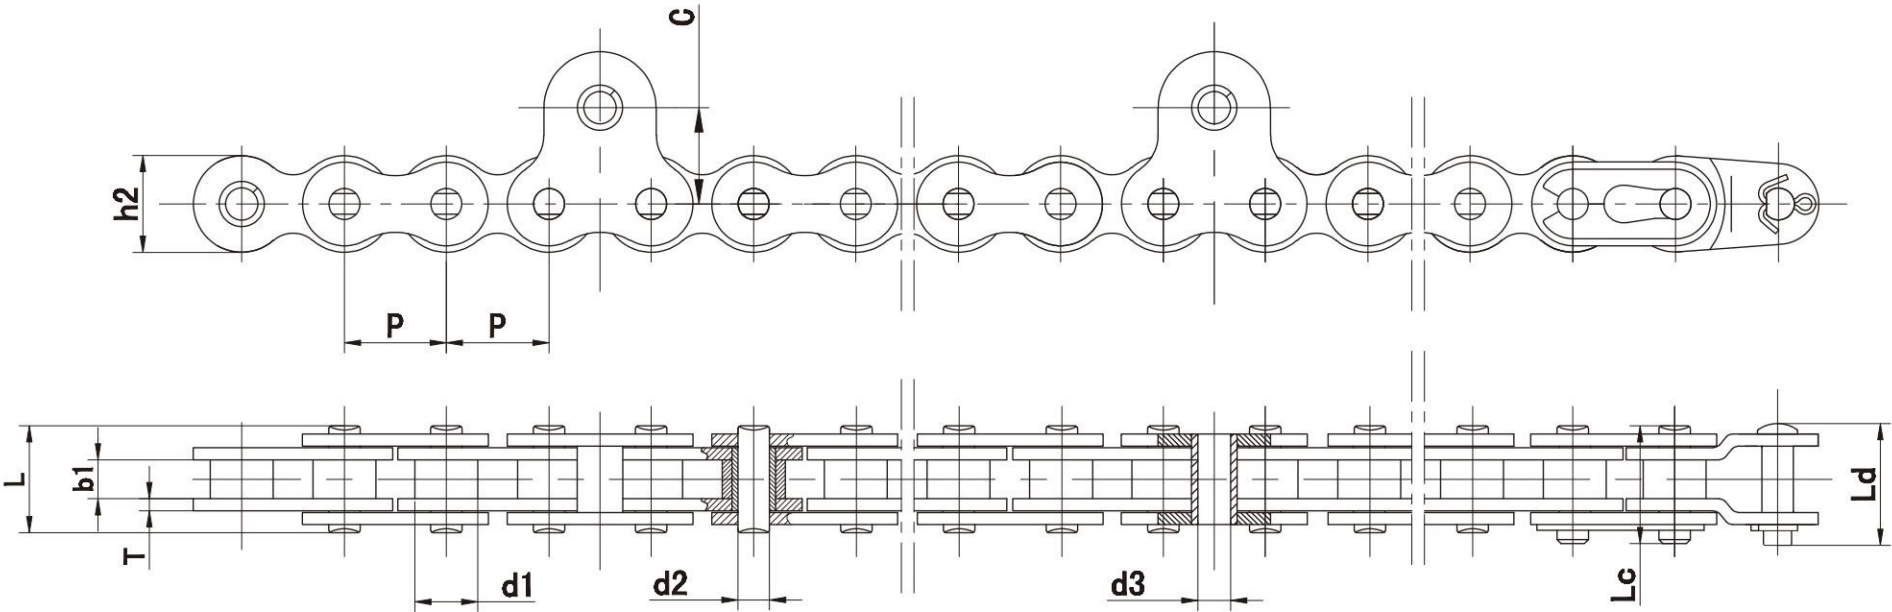


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length			内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	附板尺寸 Attachment Dimensions		极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	L _d nom	h ₂ max	T max	d ₃ nom	C	Q min	Q ₀
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
415D1	12.7	7.77	4.90	3.64	11.0	12.1	12.95	9.5	1.1	4.02	12.0	6.86/1559	8.1
415D2	12.7	7.77	4.90	3.64	11.0	12.1	12.95	9.5	1.1	4.02	12.0	6.86/1559	8.1
415D3	12.7	7.77	4.90	3.64	11.0	12.1	12.95	9.5	1.1	4.02	12.0	6.86/1559	8.1
415D4	12.7	7.77	4.68	3.62	11.8	-	-	9.6	1.3	4.0	12.0	10.30/2341	12.1
415D5	12.7	7.77	4.68	3.63	11.8	13.0	14.0	9.6	1.3	4.0	12.0	10.30/2341	12.1
415S	12.7	7.77	4.80	3.96	13.2	14.5	15.7	12.0	1.5	4.02	12.0	16.0/3636	19.1
415SA	12.7	7.77	4.80	3.96	13.2	14.5	15.7	12.0	1.5	4.50	12.0	16.0/3636	19.0

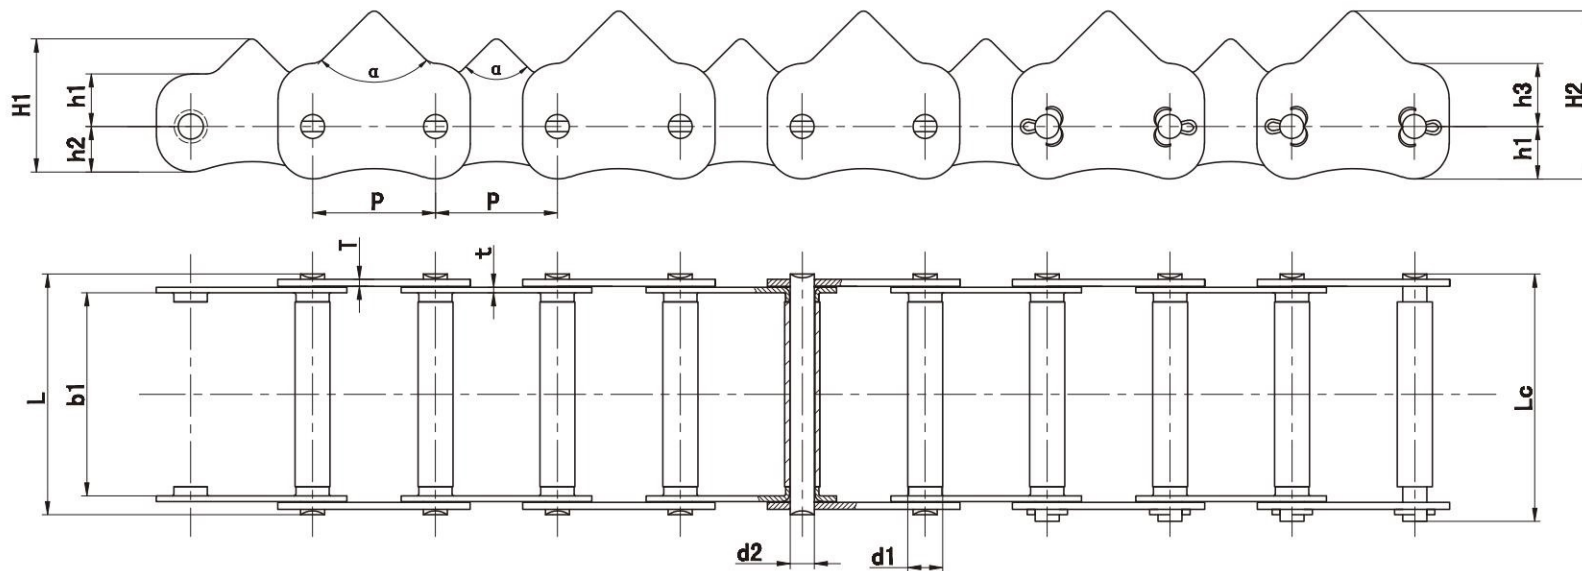


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	H1	H2	h1	h2	h3	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	kN/LB	kN
3558T-48001	35	10.1	58	7.0	69.2	72	90°	38	48	15	13	10	2.0/1.6	19.6/4455	22.5
3558T-48001F1	35	12.6	58	10.0	69.4	71.2	90°	38	48	15	13	10	2.0/1.6	19.6/4455	22.5
3558T-48002	35	12.8	58	7.0	69.2	72.0	90°	38	48	15	13	10	2.0/1.6	19.6/4455	22.5

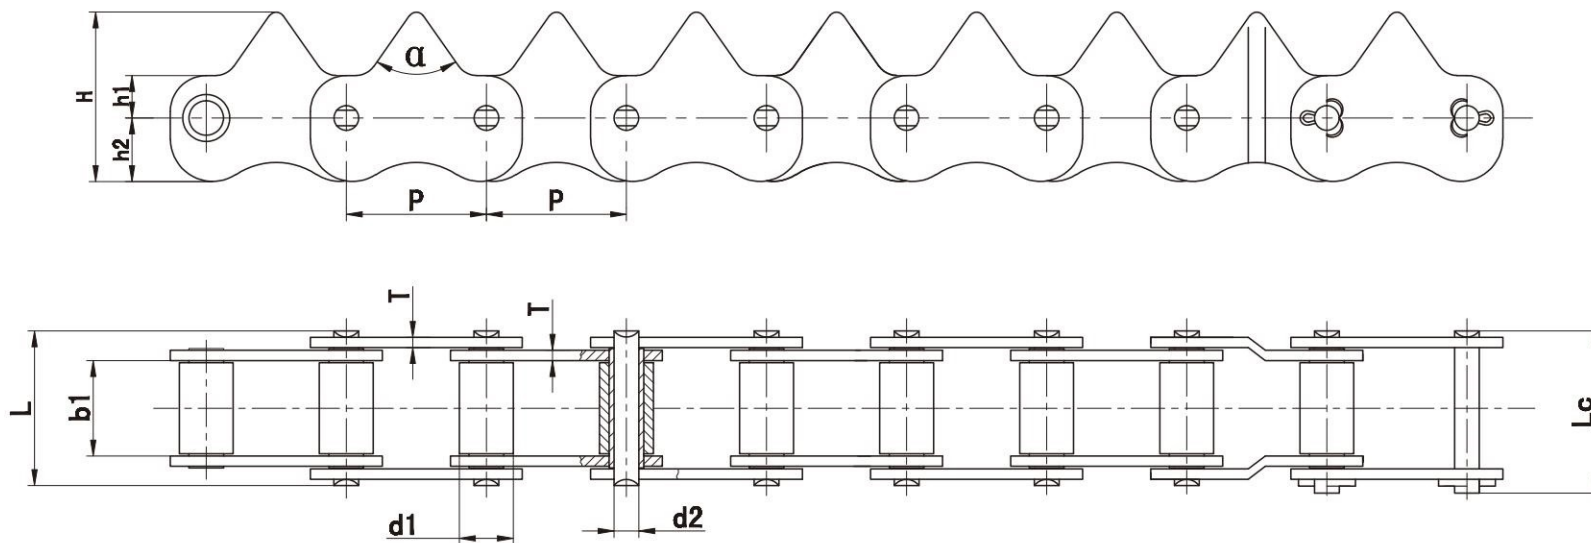


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	H	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
3322-63201	33	12.7	22.0	5.94	36.4	39.4	70°	10	15	40	2.42	19.6/4455	22.5
3325-23160	33	12.8	25.0	7.00	35.5	38.1	60°	10	13	43	1.60	21.6/4909	24.5
3330-28361	33	12.8	30.0	7.00	40.5	42.8	60°	10	13	43	1.60	21.6/4909	24.5
3330-27150	33	12.8	30.0	7.00	40.5	42.8	70°	10	13	43	1.60	21.6/4909	24.5

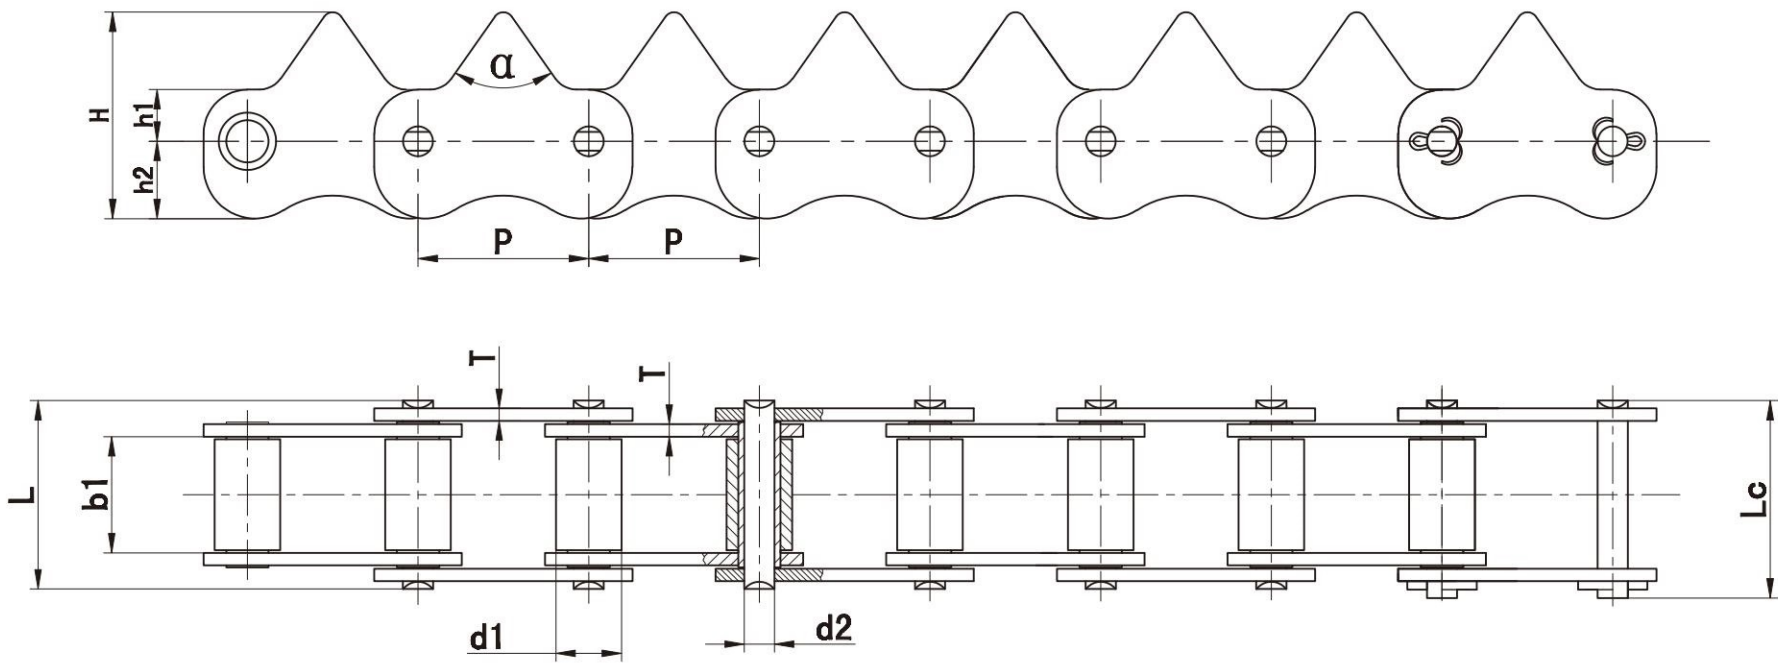


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	H	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	KN/LB	kN
3318.5-A0680106	33	10.1	18.5	7.0	29.0	31.0	70°	10	13	38	1.60	19.60/4455	22.5
3325-4LB1.35	33	10.1	25.0	7.0	37.0	39.5	90°	10	13	38	2.03	19.60/4455	24.0
3325-4LB1.45	33	10.1	25.0	7.0	35.6	37.6	70°	10	13	38	1.70	19.60/4455	22.5
3325-3572	33	10.1	25.0	7.0	36.8	39.0	70°	10	13	38	2.0/1.6	19.60/4455	23.0
3325-1E6410	33	10.1	25.0	7.0	36.8	39.0	90°	10	13	38	2.0/1.6	19.60/4455	23.0
3325-3555	33	10.1	25.0	7.0	36.8	39.0	70°	10	13	38	2.0/1.6	19.60/4455	22.5
3330-4LB1.45	33	10.1	30.0	7.0	40.3	42.7	60°	10	13	43	1.70	19.60/4455	22.5
3330-4LB1.45-01	33	10.1	30.0	7.0	40.3	42.7	70°	10	13	38	1.70	19.60/4455	22.5
3340-3572	33	10.1	40.0	7.0	51.8	54.0	70°	10	13	38	2.0/1.6	19.60/4455	23.0
3340-1E8570	33	10.1	40.0	7.0	49.2	52.5	90°	18	10	38	1.6/1.2	19.60/4455	22.0
3350-3555	33	10.1	50.0	7.0	60.2	62.5	70°	18	10	43	1.60	19.60/4455	22.5
3358-1E8350	33	10.1	58.0	7.0	68.0	72.0	90°	18	10	38	1.60	19.60/4455	22.5
3358-1E7070	33	10.1	58.0	7.0	68.0	—	90°	18	10	38	1.60	19.60/4455	22.5
3358-6365	33	10.1	58.0	7.0	68.2	70.5	70°	18	10	43	1.60	19.60/4455	22.5
3540-0875	35	10.1	40.0	7.0	50.2	52.5	70°	18	10	43	1.60	19.60/4455	22.5
3540-3572	35	10.1	40.0	7.0	50.2	52.5	70°	10	10	35	1.60	19.60/4455	22.5
3558-4LB1.35	35	13.2	58.0	9.4	70.0	73.2	90°	15	18	47	2.03	22.54/5123	27.1
3358-5080	35	10.1	50.0	7.0	60.2	62.5	70°	18	10	38	1.60	19.60/4455	22.5
3325-49200	33	12.8	25	7.0	35.5	38.1	70°	10	13	43	1.60	21.6/4909	24.5

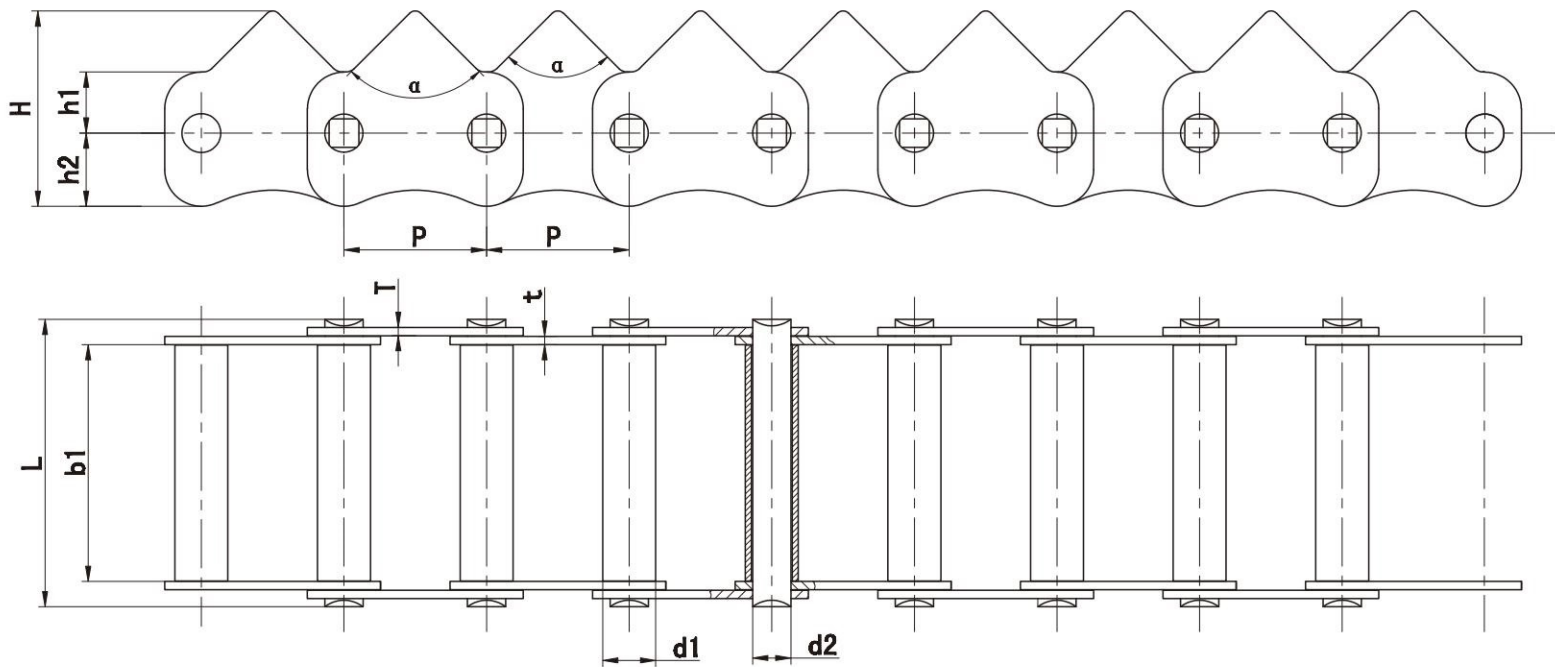


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	α	h1	h2	H	t/T max	Q min	Q ₀
	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
3558-48181	35.0	13.0	58.0	9.5	70.4	90°	15	18	43	2.0	19.6/4455	22.5

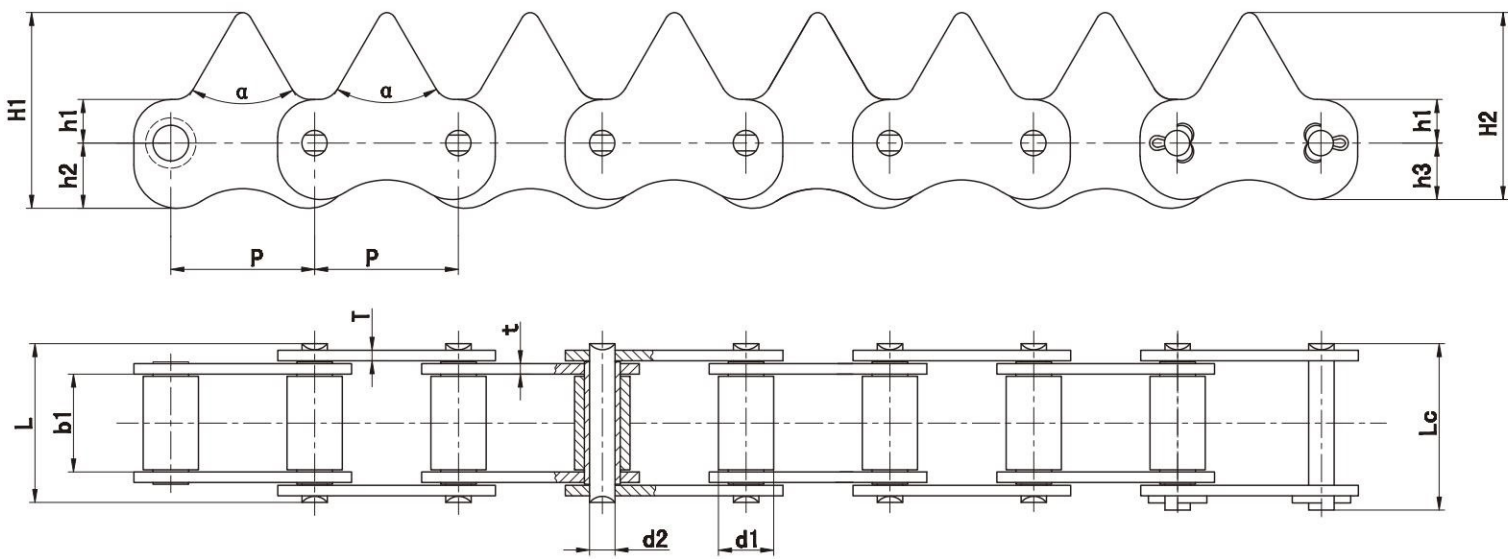


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	h3	H1	H2	t/T max	Q min	Q ₀
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	kN/LB	kN
3330—66401	33	12.7	30	5.94	44.4	47.4	60°	10	15	13	45	43	2.42	19.6/4457	22.5

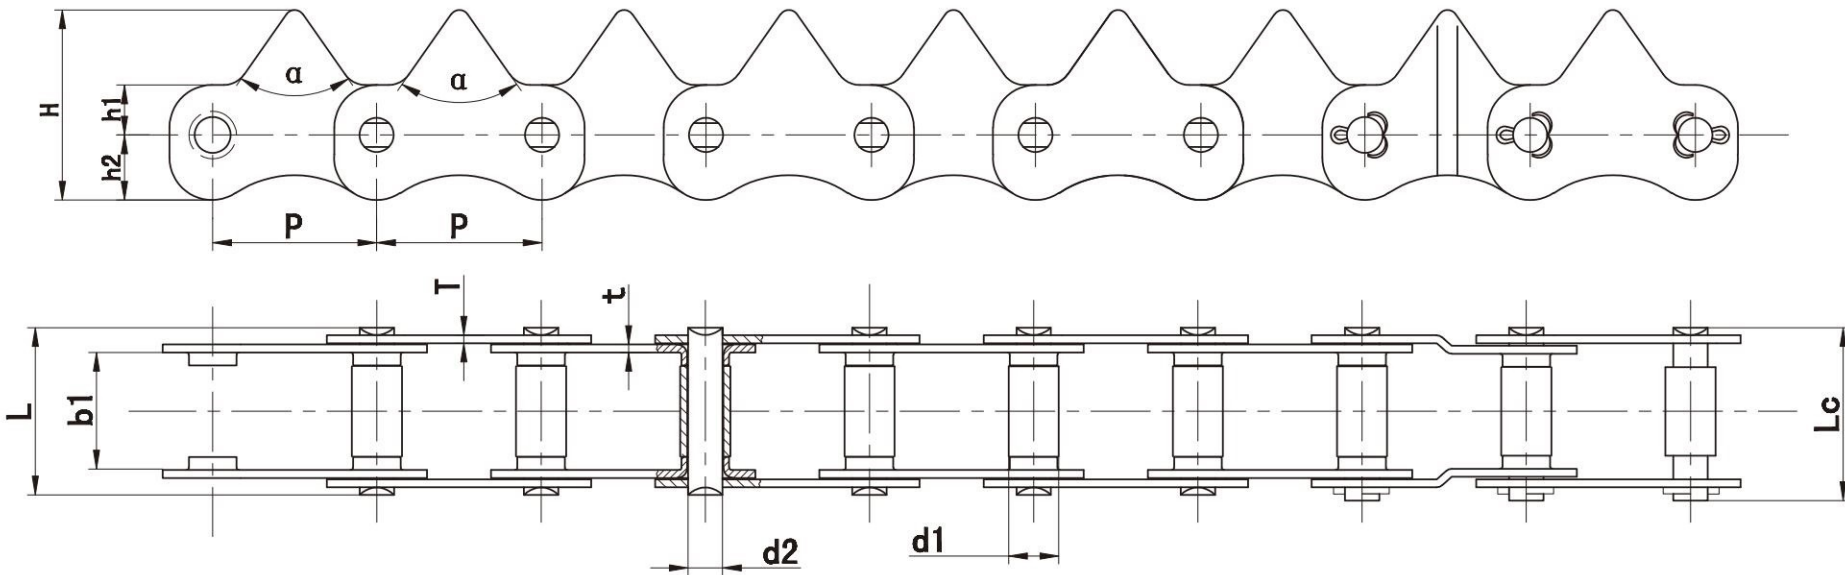


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	h1	h2	H	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
3318T-5010	33	10.1	18.0	7.0	28.5	31.4	70°	10	13	38	1.6	19.60/4455	22.5
3322T-52800	33	10.1	22.0	7.0	31.9	34.5	70°	10	13	38	1.6	17.64/4010	22.5
3322T-28241	33	12.1	21.3	7.0	31.8	34.1	60°	10	13	43	1.6	19.60/4455	22.5
3325T-23151	33	10.1	25.0	7.0	35.5	37.7	60°	10	13	43	1.6	19.60/4455	22.5
3325T-49201	33	10.1	25.0	7.0	35.5	37.7	90°	10	13	38	1.6	19.60/4455	22.5
3325T-3650	33	10.1	25.0	7.0	35.5	38.1	70°	10	13	38	1.6	19.60/4455	22.5
3330T-27151	33	10.1	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3330T-28241	33	10.1	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-28241F1	33	12.6	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-28241F2	33	12.1	29.3	7.0	39.8	42.1	60°	10	13	43	1.6	19.60/4455	22.5
3330T-3501	33	10.1	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3330T-59750	33	10.1	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-5028	33	10.1	30.0	7.0	40.9	43.7	60°	10	13	43	1.6/2.0	19.60/4455	22.5
3330T-52200	33	10.1	30.0	7.0	41.2	43.7	60°	10	13	43	1.6/2.0	19.60/4455	22.5
3335T-27151	33	10.1	35.0	7.0	45.5	47.8	70°	10	13	38	1.6	19.60/4455	22.5
3358T-3330	33	10.1	58.0	7.0	68.0	72.0	90°	18	10	38	1.6	19.60/4455	22.5
3358T-53871	33	10.1	58.0	7.0	68.1	70.8	75°	18	10	43	1.6	19.60/4455	22.5
3358T-6365	33	10.1	58.0	7.0	68.2	72.0	75°	18	10	43	1.6	19.60/4455	22.5
3330T-28242	33	12.8	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.60/4455	22.5
3330T-27152	33	12.8	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.60/4455	22.5
3350T-744	33	10.1	50.0	7.0	60.2	63.0	90°	18	10	38	1.6	19.60/4455	22.5
3325T-699	33	10.1	25.0	7.0	36.2	39.3	90°	10	13	38	2.0/1.6	19.60/4455	22.5
3325T-3817	33	10.1	25.0	7.0	36.2	39.0	90°	10	13	38	2.0/1.6	19.61/4455	22.5
3330T-3817	33	12.1	30.0	7.0	40.5	42.8	60°	10	13	43	1.6	19.61/4455	22.5
3330T-53981	33	12.8	30.0	7.0	40.5	42.8	70°	10	13	38	1.6	19.6/4455	22.5
3330T-5441	33	10.1	30.0	7.0	40.9	43.7	60°	10	13	43	1.6/2.0	19.61/4455	22.5
3358T-6365F1	33	12.8	58.0	7.0	68.2	72.0	75°	18	10	43	1.6	19.6/4455	22.5
3325T-5060	33	10.1	25.0	7.0	36.8	39.0	70°	10	13	38	1.6/2.0	19.61/4455	22.5
3350T-6379	33	10.1	50.0	7.0	60.2	62.5	75°	18	10	43	1.6	19.6/4455	22.5

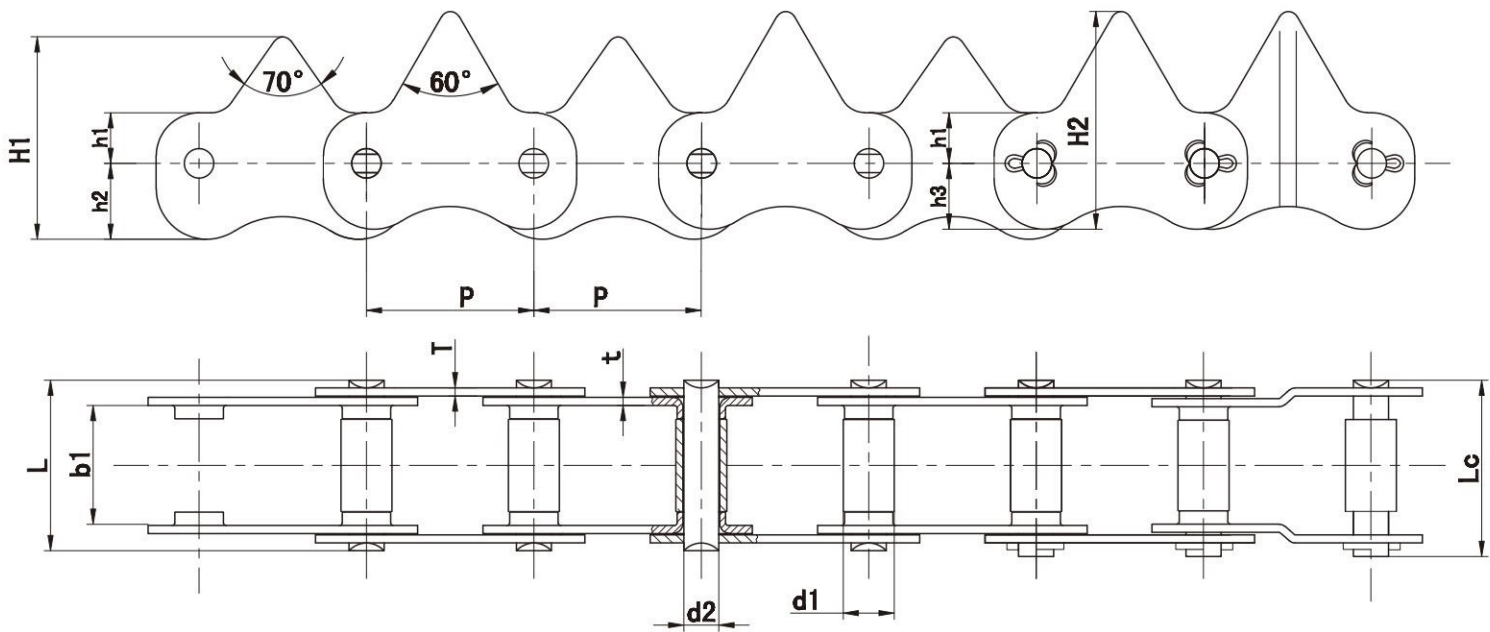


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h1	h2	H1	h3	H2	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
3322T-63203	33	10.1	22	7.0	33.0	35.7	10	16	36	13	43	1.6/2.0	19.6/4455	23.0
3330T-66103	33	10.1	30	7.0	40.9	43.7	10	16	36	13	43	1.6/2.0	19.6/4455	23.0

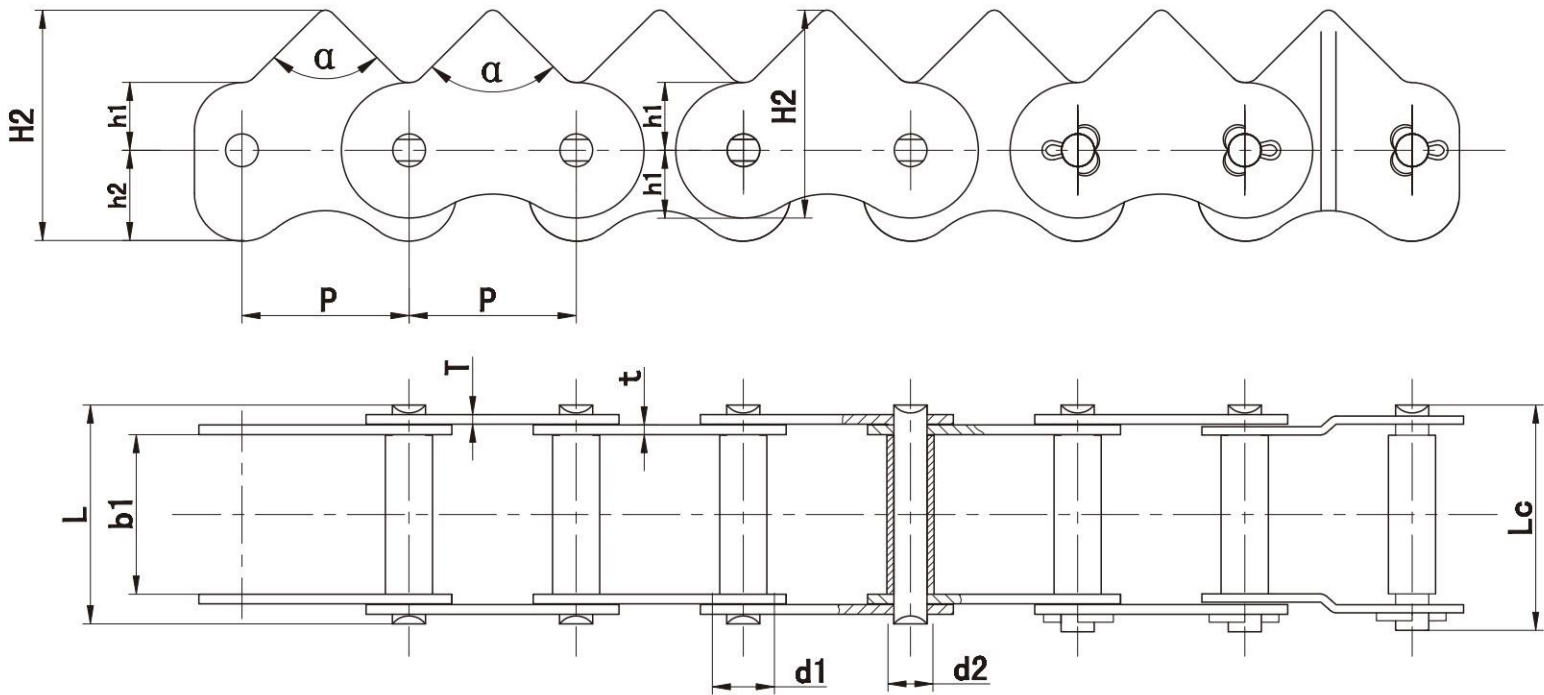


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness				链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	α	h1	H1	h2	H2	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	kN/LB	kN
3325-1E8350	33	10.1	25	7.0	34.2	37.8	90°	10	35	13	38	1.6/1.2	19.6/4455	22.0
3325-1E6110	33	10.1	25	7.0	34.2	37.0	70°	10	35	13	38	1.6/1.2	19.6/4455	22.0

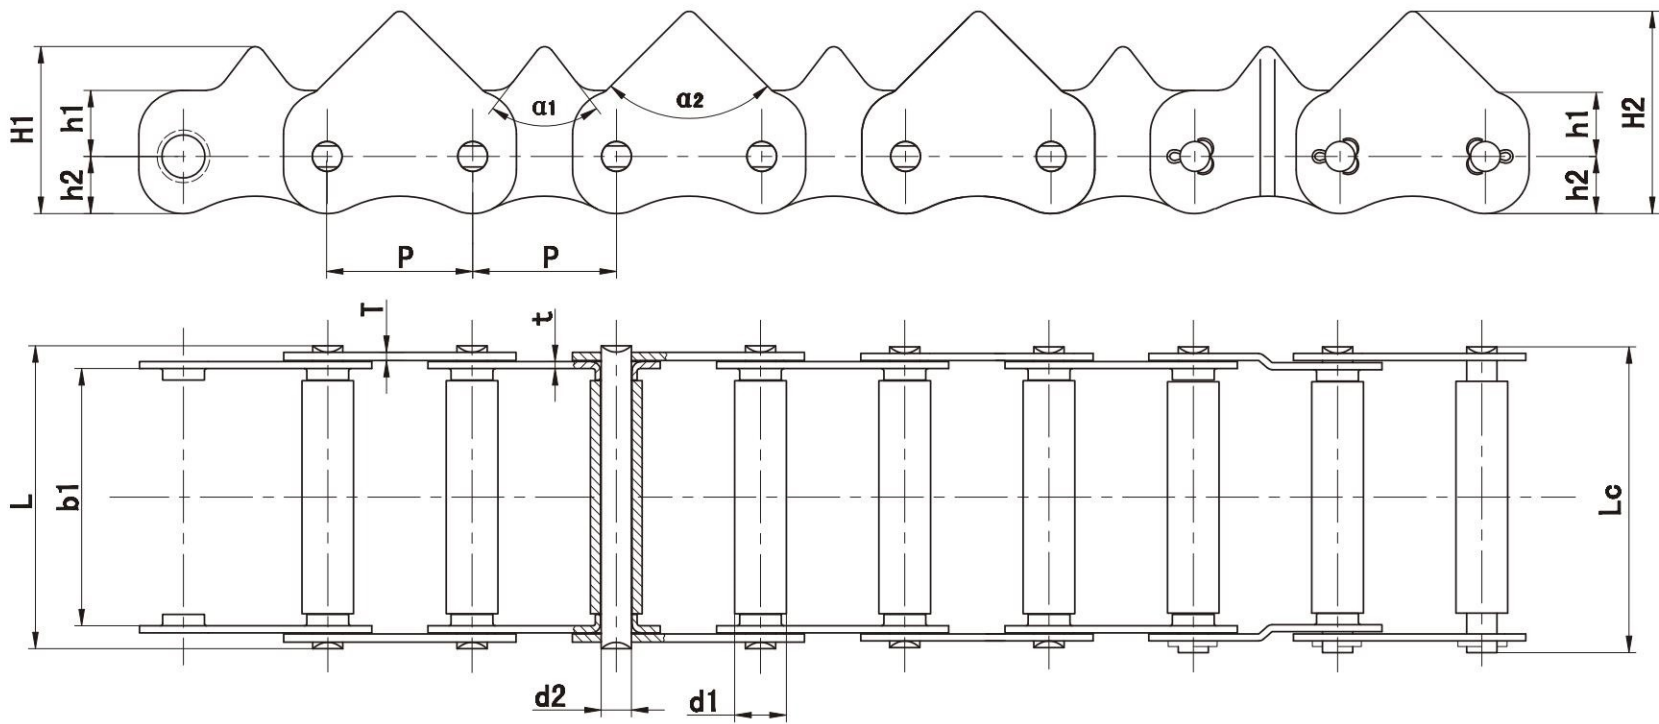


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness				链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	$\alpha1/\alpha2$	h1	h2	H1	H2	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	kN/LB	kN
3358T-5K151	33	12.8	58	9.5	69.7	72.7	75°/90°	15	13	38	46	2.0/1.6	19.6/4455	22.5
3358T/3653	33	12.8	58	9.5	69.7	72.7	90°/90°	16	12	38	48	2.0/1.6	19.6/4455	22.5

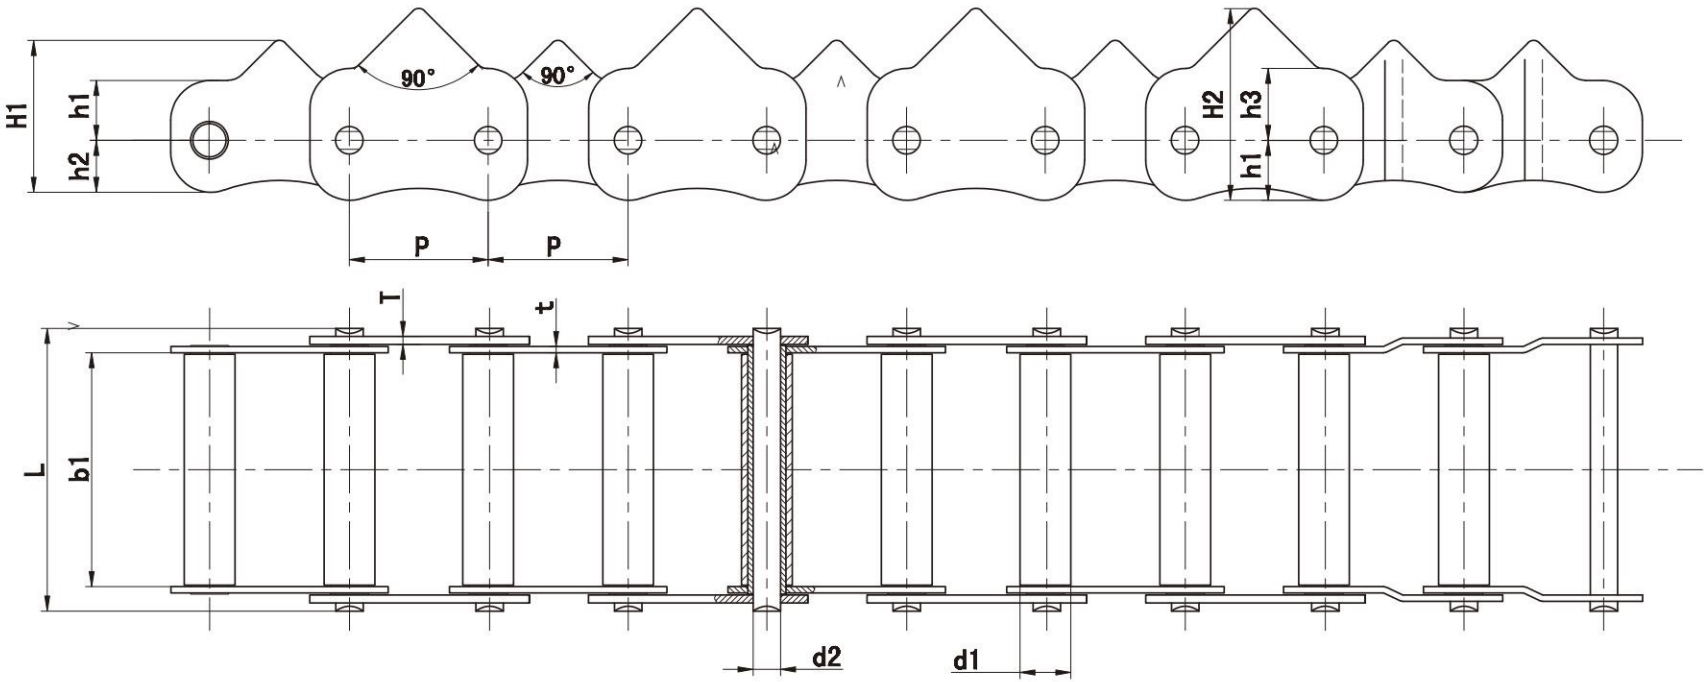


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	h1	h2	h3	H1	H2	t/T max	Q min	Q0
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
3558—48180	35	12.8	58	7.0	70.4	15	13	18	38	48	2.03	28.0/6364	29.0

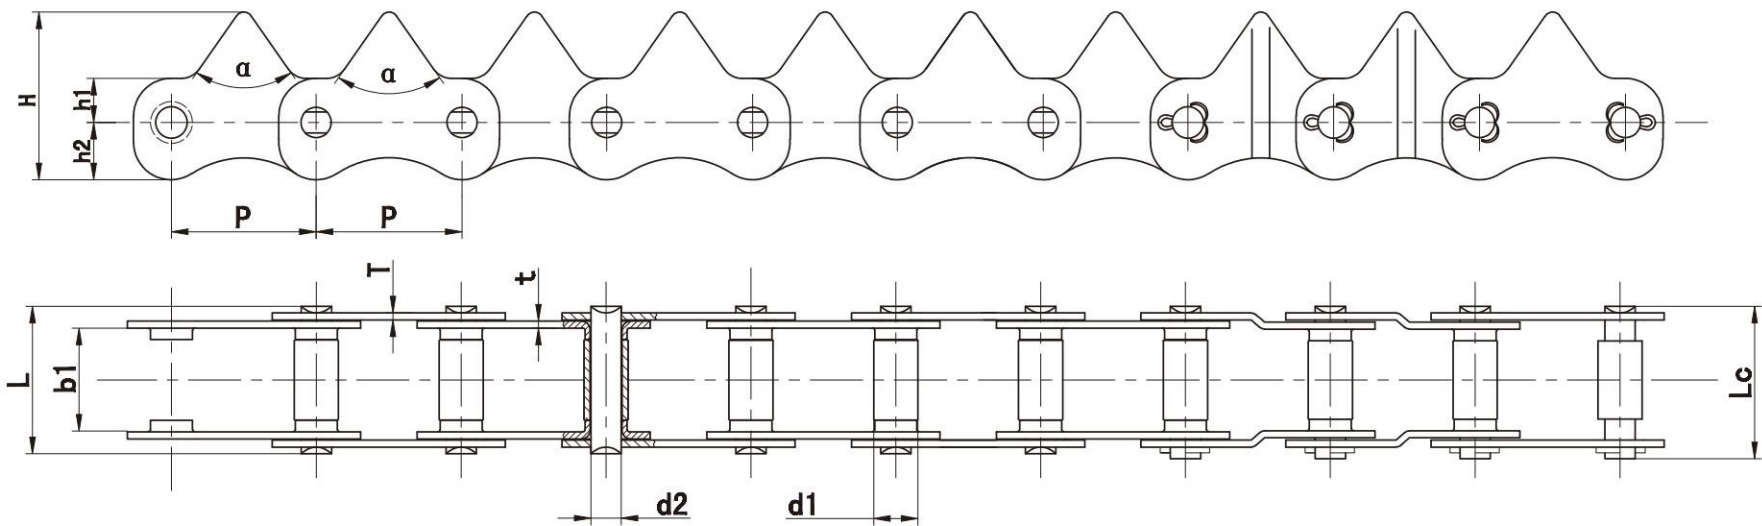

	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	α	h ₁	h ₂	H	t/T max	Q min	Q ₀
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
	33	10.1	25.0	7.0	35.5	37.8	70°	10	13	38	1.6	19.60/4455	22.5

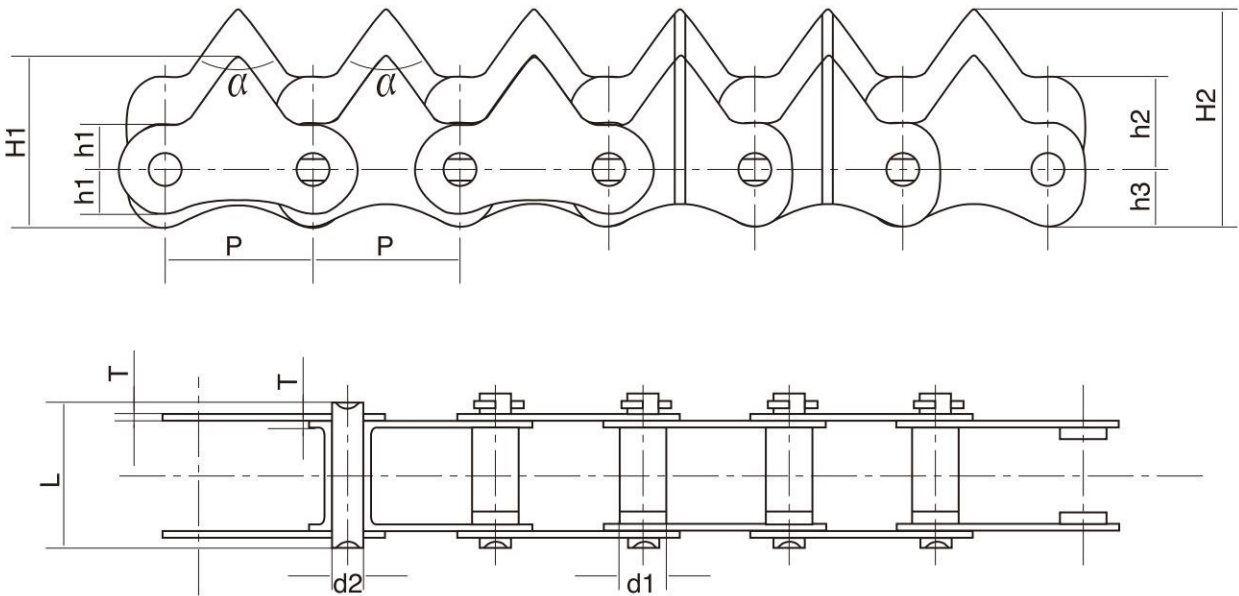


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness						极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d ₁ max	b ₁ min	d ₂ max	L max	L _c max	α	h ₁	h ₂	h ₃	H ₁	H ₂	T max	Q min	Q ₀
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	kN/LB	kN
	33	10.1	28	7.0	34.5	39	70°	10	20	13	35	48	1.6	19.60/4455	22.5

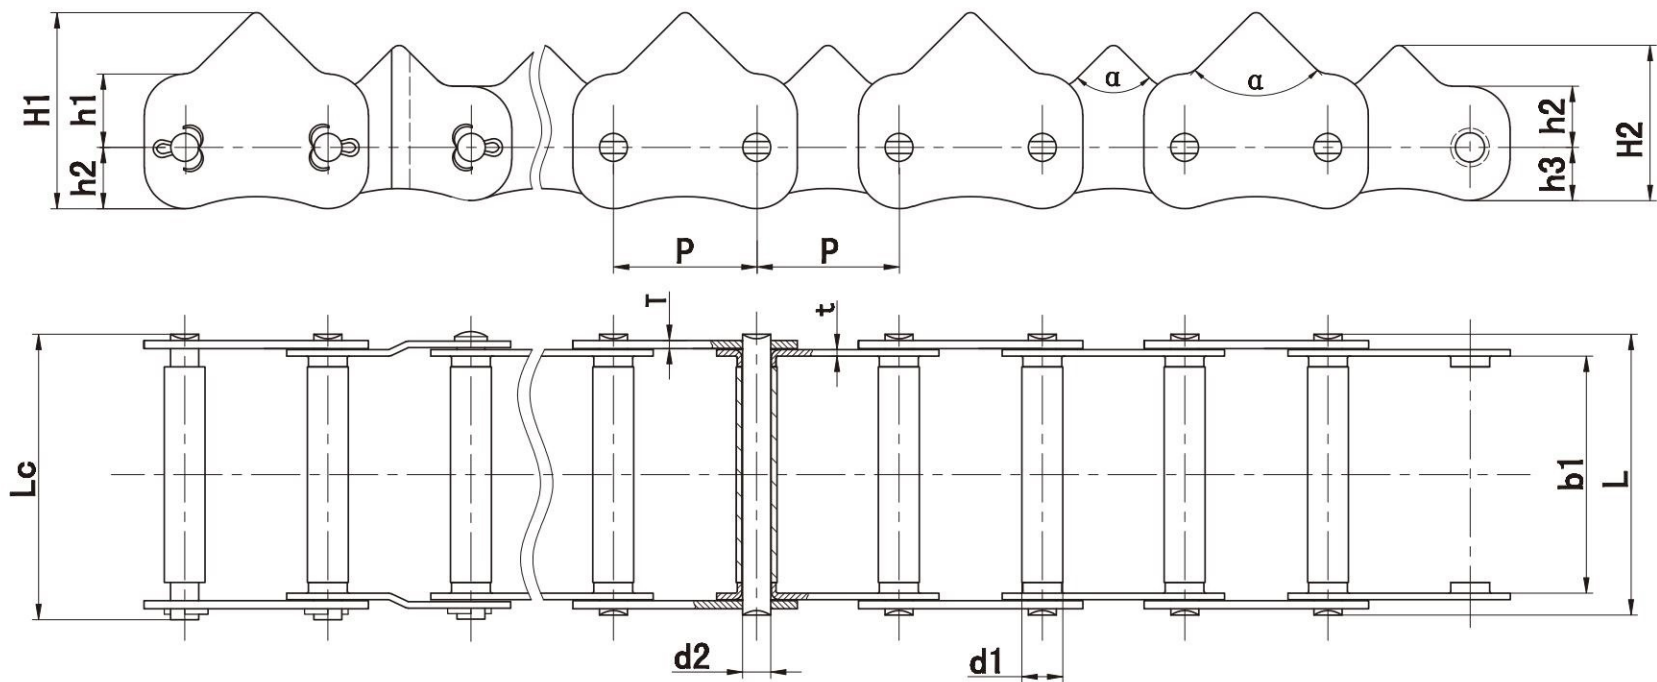


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	α	H1	H2	h1	h2	h3	T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	kN/LB	kN
3358T(4#)	35.0	10.1	58.0	7.00	69.2	72.0	90°	48	38	18	15	13	2.0/1.6	19.60/4455	22.5

注：该链条为出口专供链条
Note: This chain is for export exclusively

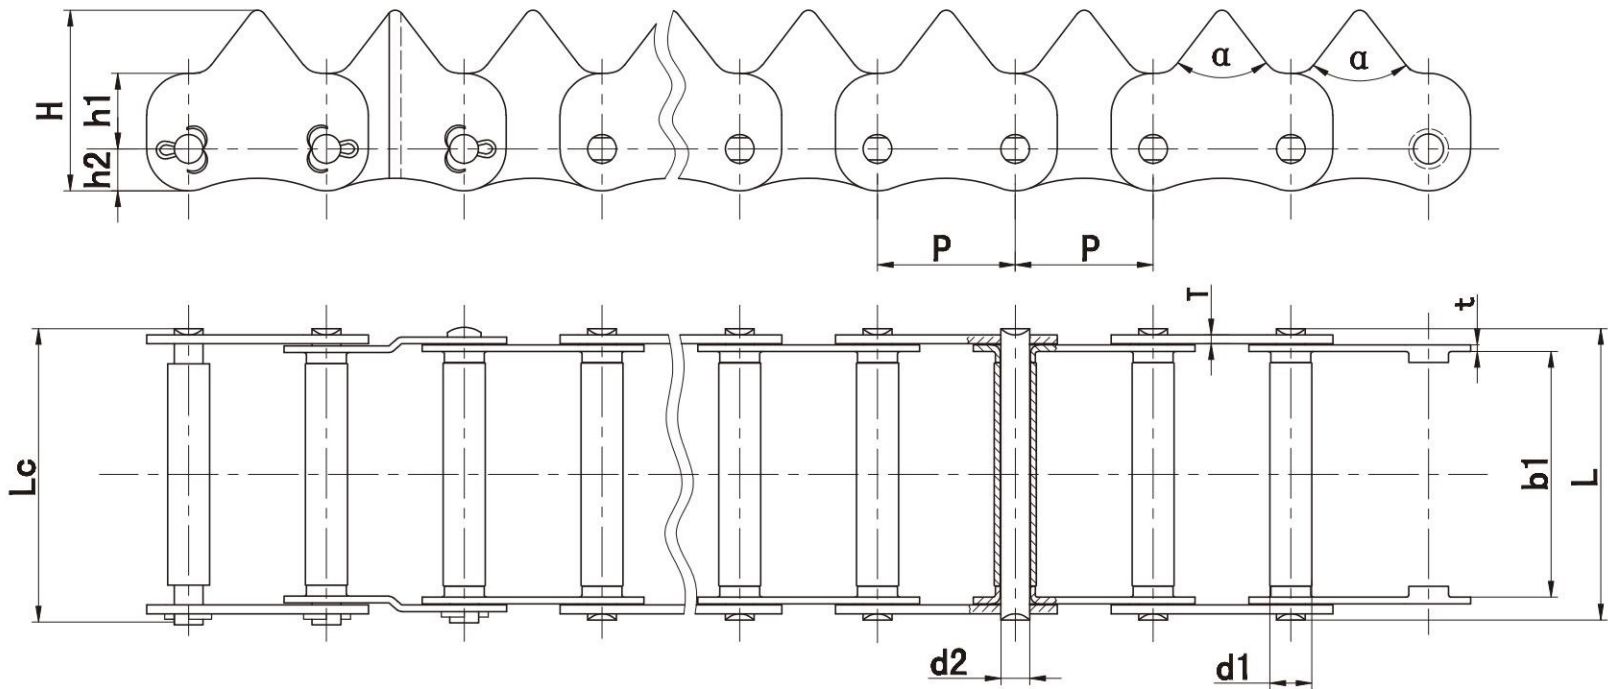


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	齿型角 Tooth Angle	链板尺寸 Plate Thickness				链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	H	h1	h2	T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
3358T(6#)	33.0	10.1	58.0	7.00	69.2	72.0	70°	43	18	10	2.0/1.6	19.60/4455	22.5

注：该链条为出口专供链条
Note: This chain is for export exclusively

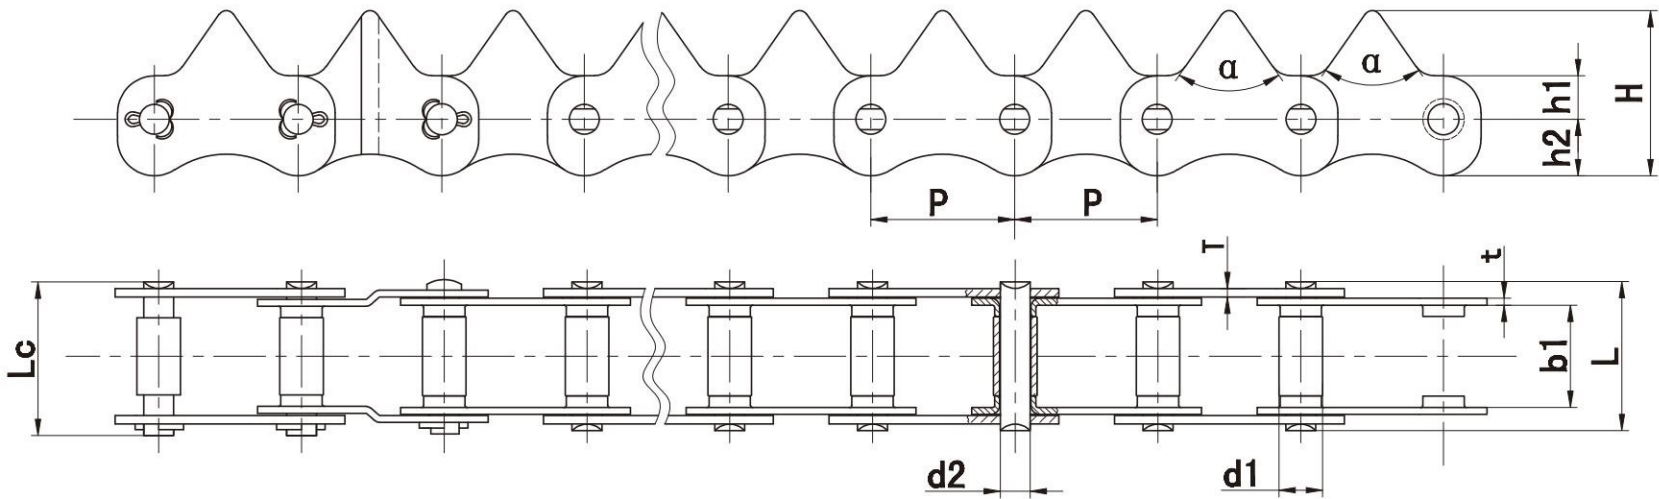

	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness			链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	H	h1	h2	T/t max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	kN/LB	kN
3322T(7#)	33.0	10.1	22.0	7.00	33.1	36.2	70°	38	10	13	2.0/1.6	19.6/4455	22.5
3325T(7#)	33.0	10.1	25.0	7.00	36.3	39.6	70°	38	10	13	2.0/1.6	19.6/4455	22.5
3330T(7#)	33.0	10.1	30.0	7.00	41.2	44.3	70°	38	10	13	2.0/1.6	19.6/4455	22.5
3322T(10#)	33.0	10.1	30.0	7.00	41.2	43.7	60°	43	10	13	2.0/1.6	19.6/4455	22.5
3335T(7#)	33.0	10.1	30.0	7.00	46.2	49.4	70°	38	10	13	2.0/1.6	19.6/4455	22.5
3330T(3#)	33.0	10.1	30.0	7.00	41.2	44.3	70°	30	10	10	2.0/1.6	19.6/4455	22.5

注：该链条为出口专供链条
Note: This chain is for export exclusively

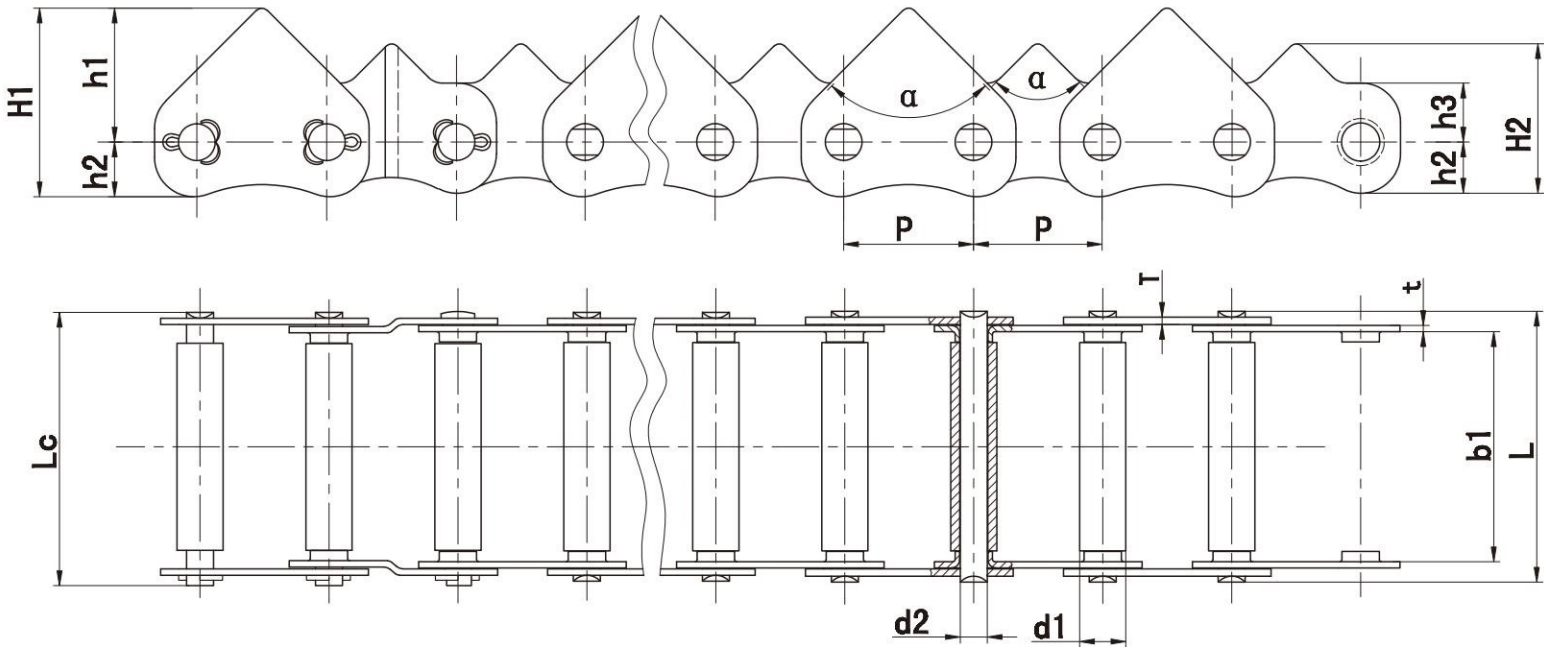

	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		齿型角 Tooth Angle	链板尺寸 Plate Thickness					链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	α	H1	H2	h1	h2	h3	T max	Q min	Q0
	mm	mm	mm	mm	mm	mm		mm	mm	mm	mm	mm	mm	kN/LB	kN
3358T(11#)	33	12.7	58.0	9.5	70.4	74.1	90°	48	38	36	12	16	2.0/1.6	19.60/4455	22.5

注：该链条为出口专供链条
Note: This chain is for export exclusively