




Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	α mm
CA620-C30E	42.01	24.51	20.2	3.25	58.7	45°

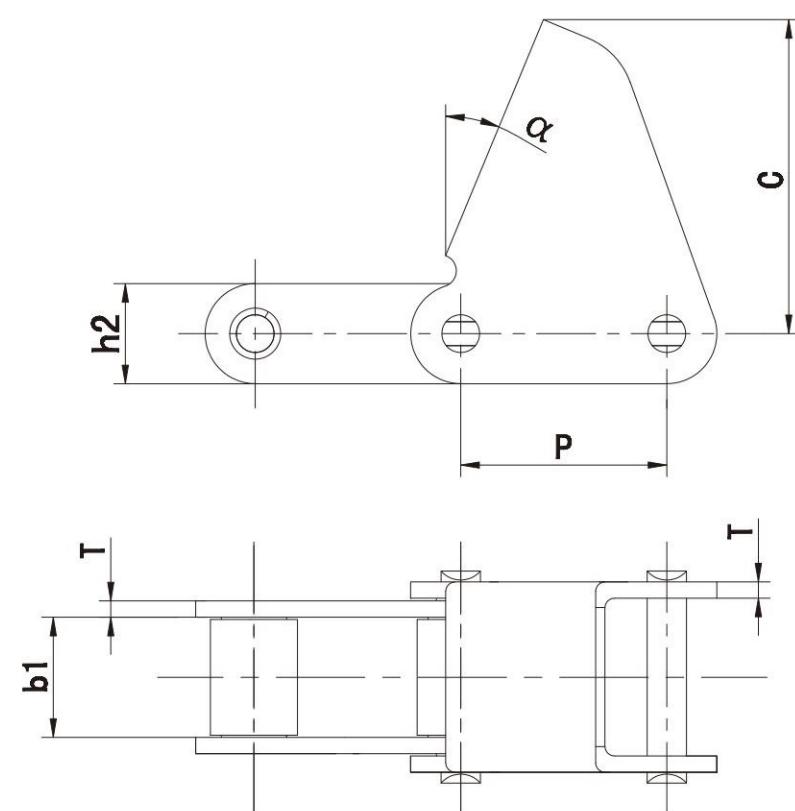


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	α mm
CA627-CPEF1	30.0	19.05	20.5	3.0	62.5	22.5°
CA627-CPEF2	30.0	19.60	20.5	3.0	62.5	22.5°
CA627-CPEF9	30.0	19.05	20.5	3.0	62.5	22.0°

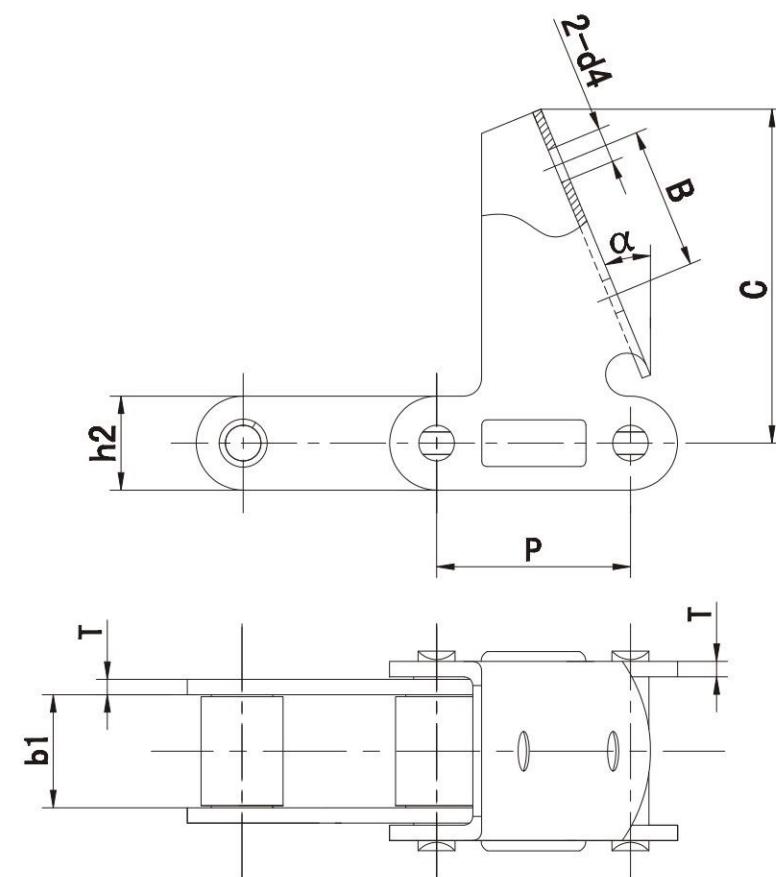


Chain No.	P mm	b1 mm	h2 mm	d4 mm	T mm	B mm	C mm	α mm
CA2060H-7AUE	38.1	12.57	18.0	8.5	3.25	30	57.2	22.5°
CA550-CPEF1	41.4	19.81	19.3	—	2.8	—	63.5	15.0°

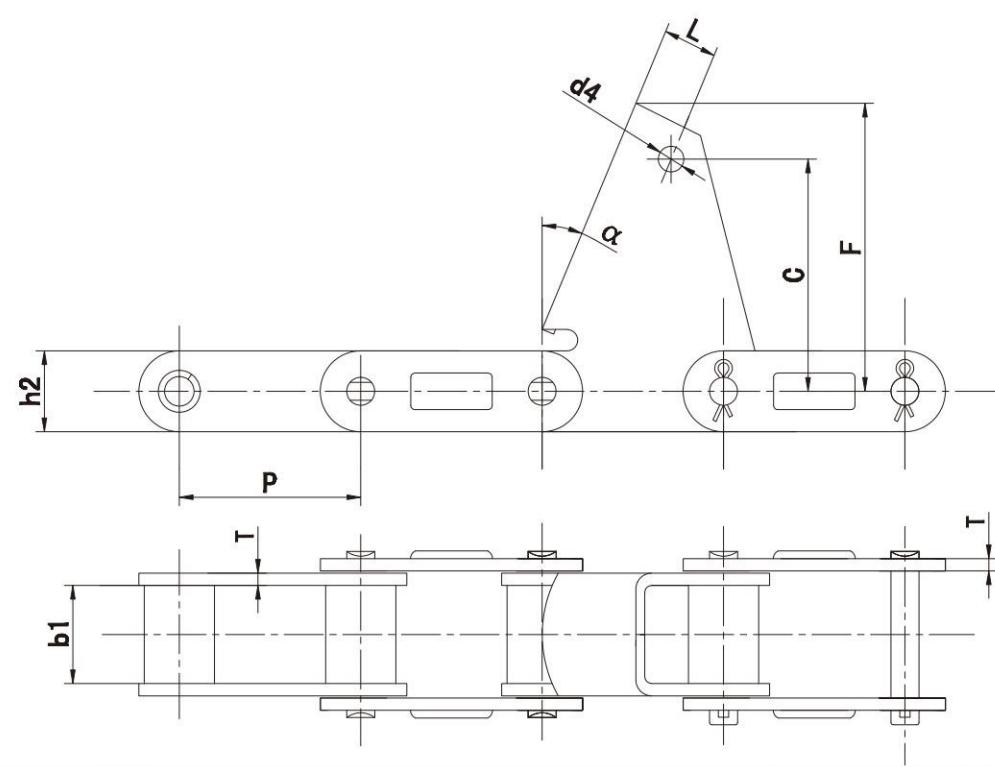


Chain No.	P mm	b1 mm	h2 mm	L mm	d4 mm	T mm	C mm	F mm	α mm
38.4VBF4	38.4	19.05	20.5	15.0	8.1	3.0	48.0	64.0	22°
38.4VBF12	38.4	19.05	20.5	—	—	3.0	—	62.5	22.5°

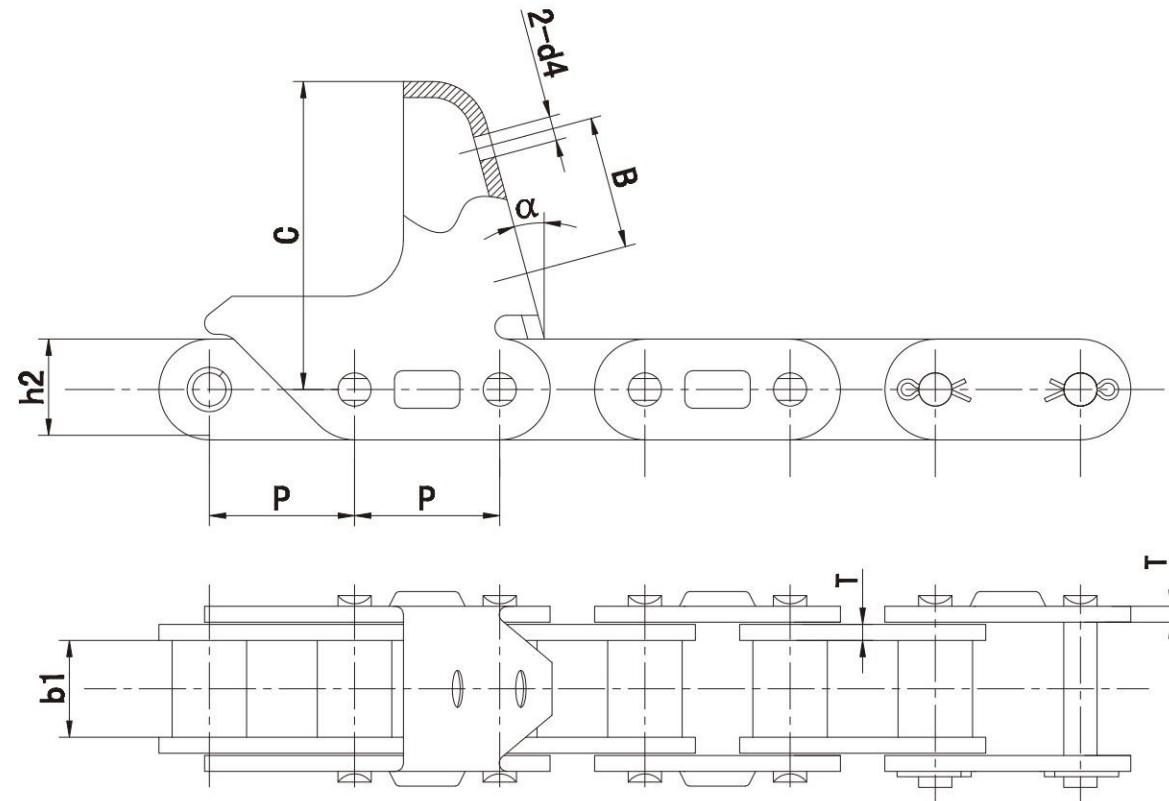


Chain No.	P mm	b1 mm	h2 mm	B mm	d4 mm	T mm	C mm	$\alpha$ mm
CA627-M40A	30.0	19.05	20.5	36.1	6.5	3.0	63.0	15.0°
CA627-CPEF7	30.0	19.05	20.5	35.5	6.5	3.0	63.0	15.0°
CA627-CPEF12	30.0	19.05	20.5	30.0	6.5	3.0	63.0	22.5°
CA627-CPEF13	30.0	19.05	20.5	25.5	6.5	3.0	63.0	15.0°

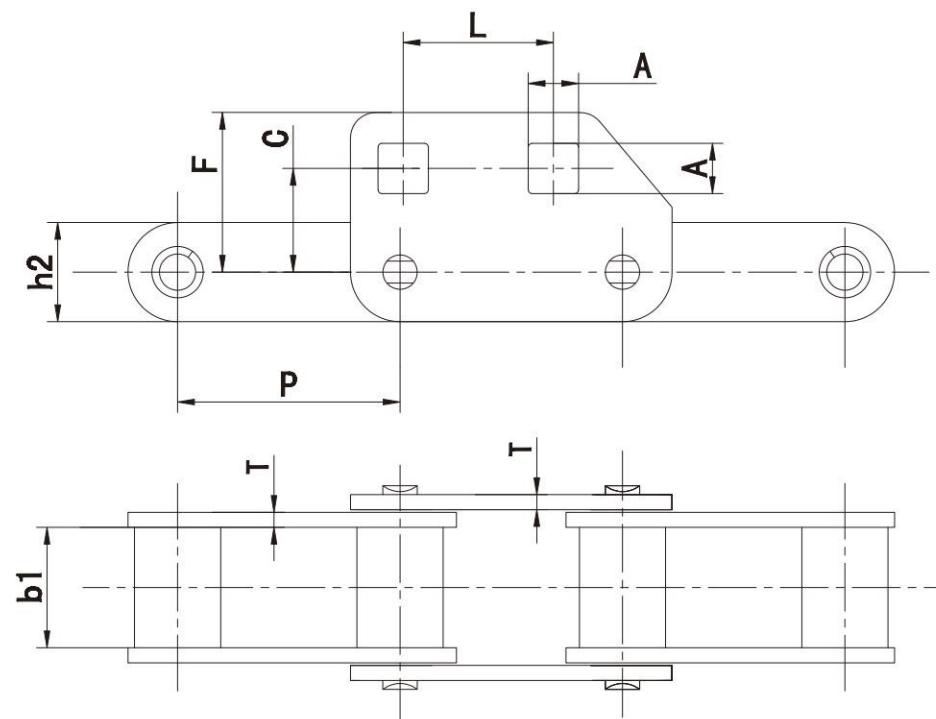


Chain No.	P mm	b1 mm	L mm	T mm	C mm	F mm	A mm
CA620F2	42.01	24.5	21	3.25	18.4	35.9	9

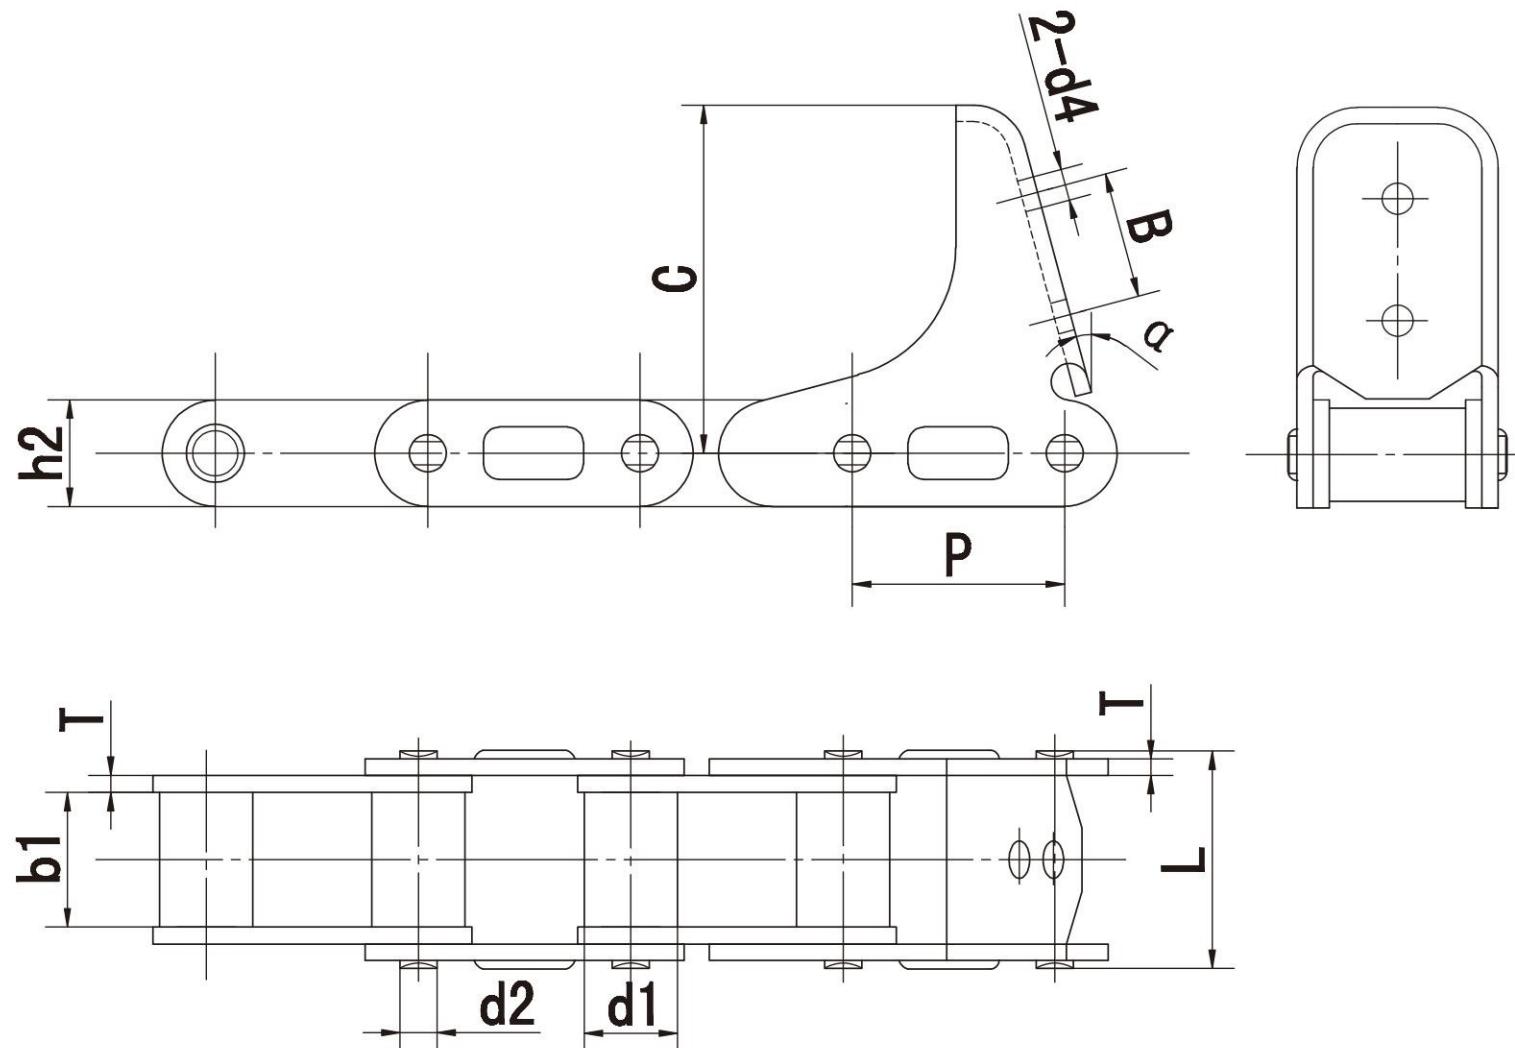


Chain No.	Pitch	Roller Diameter	Width between Inner Plates	Pin Diameter	Pin Length	Plate Dimension							Ultimate Tensile Strength
	p	d1 max	b1 min	d2 max	L max	h2	T	C	α	B	d4	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	°	mm	mm	KN/LB	
CA620MC11E	40.25	17.67	24.51	7.16	41.5	20.2	3.1	66	15	24	6.0	39.1/8866	
CA620C11E	42.01	17.67	24.51	7.16	41.5	20.2	3.1	66	15	24	6.0	39.1/8866	

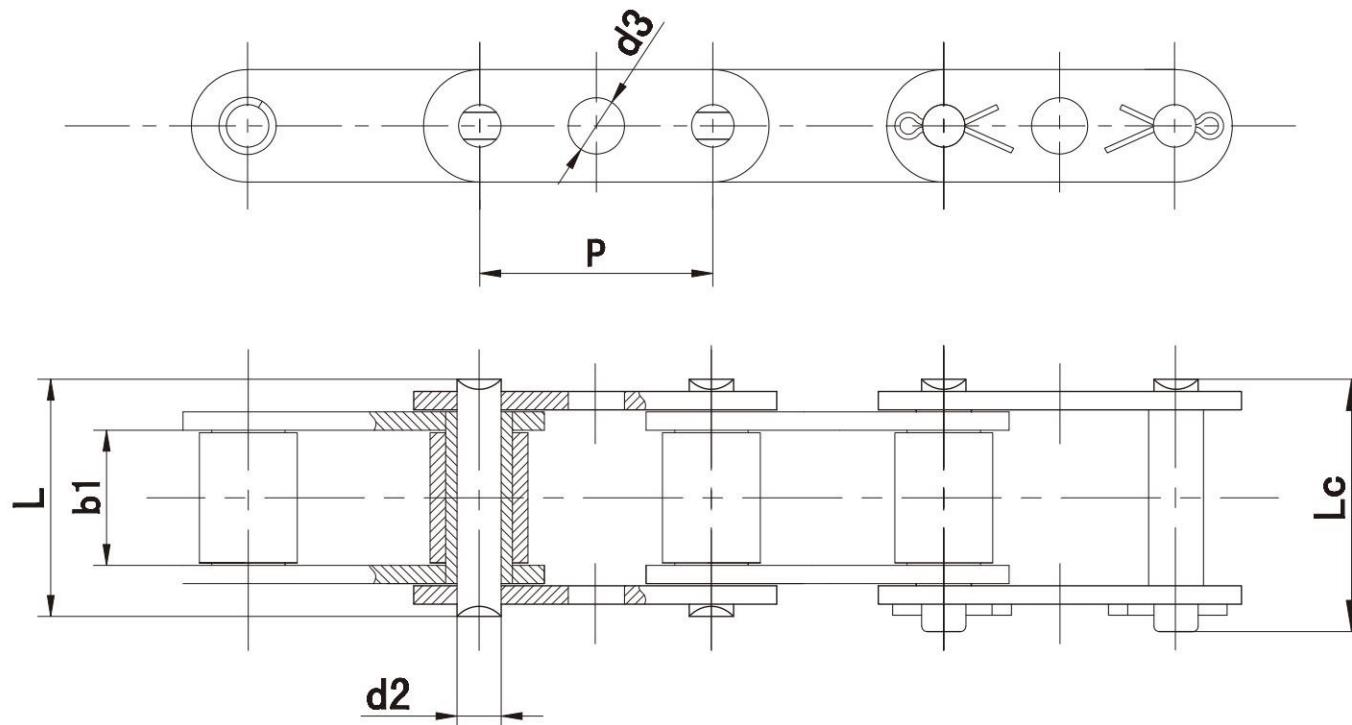


Chain No.	P mm	b1 mm	d2 mm	d3 mm	L mm	Lc mm
CA550GKF1	41.4	19.81	7.19	10	35	38

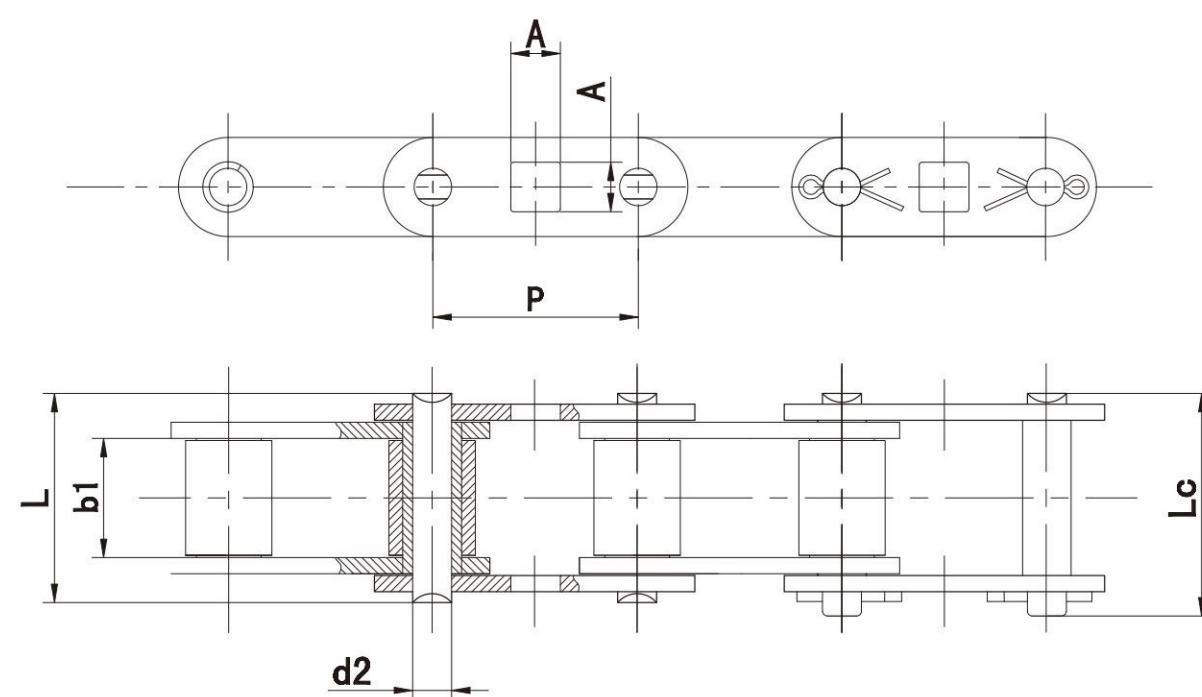


Chain No.	P mm	b1 mm	d2 mm	A mm	L mm	Lc mm
CA550GKF2	41.4	19.81	7.19	8.3	35	38

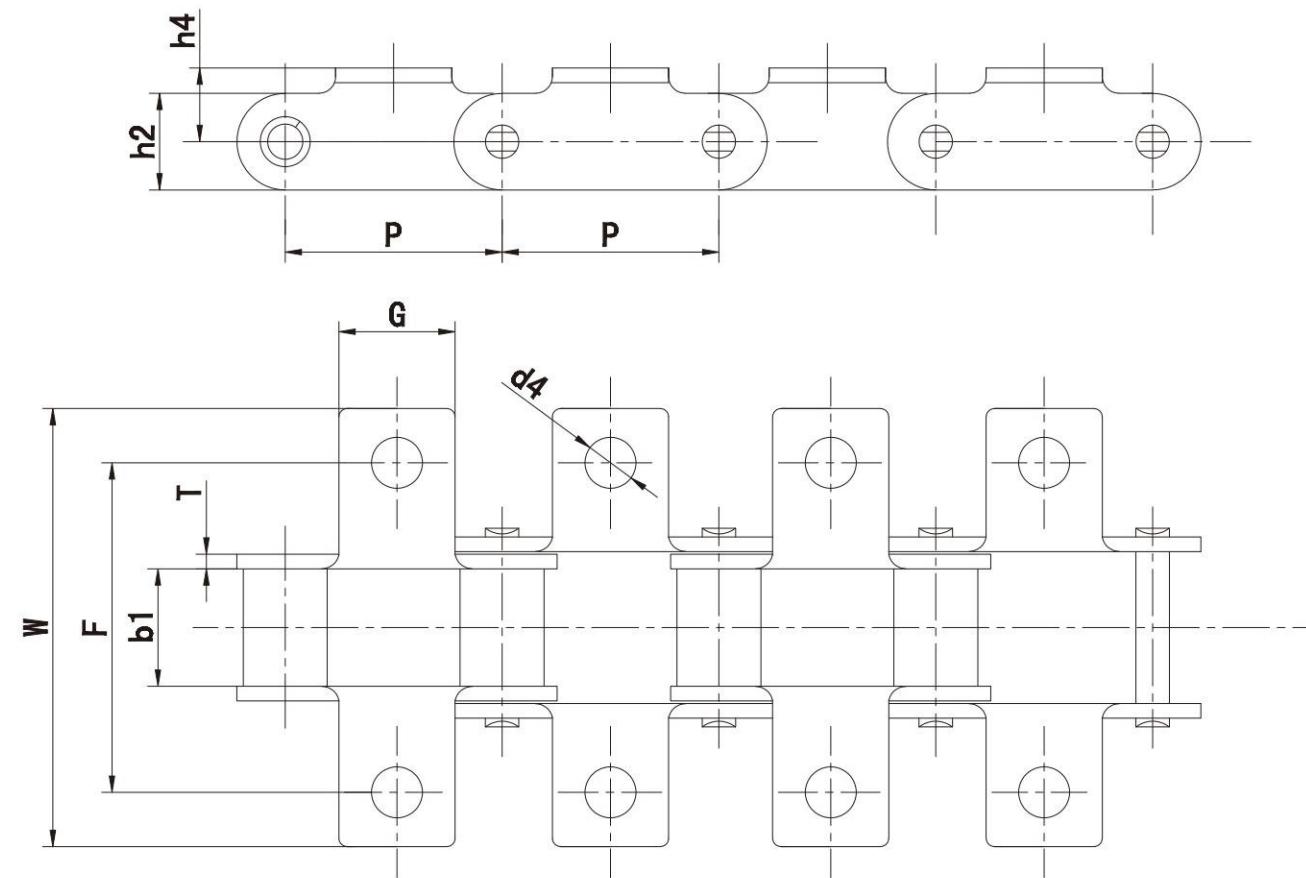


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h2 mm	h4 mm	T mm	d4 mm
CA550K11	41.40	19.81	22.2	50.8	75.4	19.3	10.7	2.80	9.92
CA550K1F8	41.40	19.81	22.2	50.8	75.4	19.3	10.7	2.80	6.75
CA550K17	41.40	19.81	22.2	54.0	76.2	19.3	12.7	2.80	6.75
CA550K20	41.40	19.81	22.2	50.8	76.2	19.3	12.7	2.80	6.75
CA550K22	41.40	19.81	22.2	54.0	76.2	19.3	12.7	2.80	9.53
CA620K1F2	42.01	24.51	22.2	62.7	80.2	20.2	11.5	3.25	6.75
CA620KIS	42.01	24.51	22.2	62.7	80.2	20.2	11.5	3.25	8.33

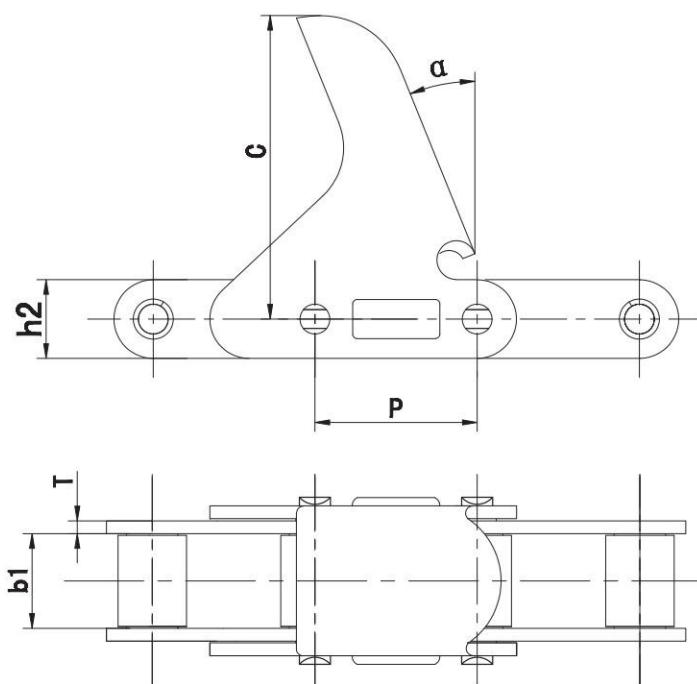

C6E

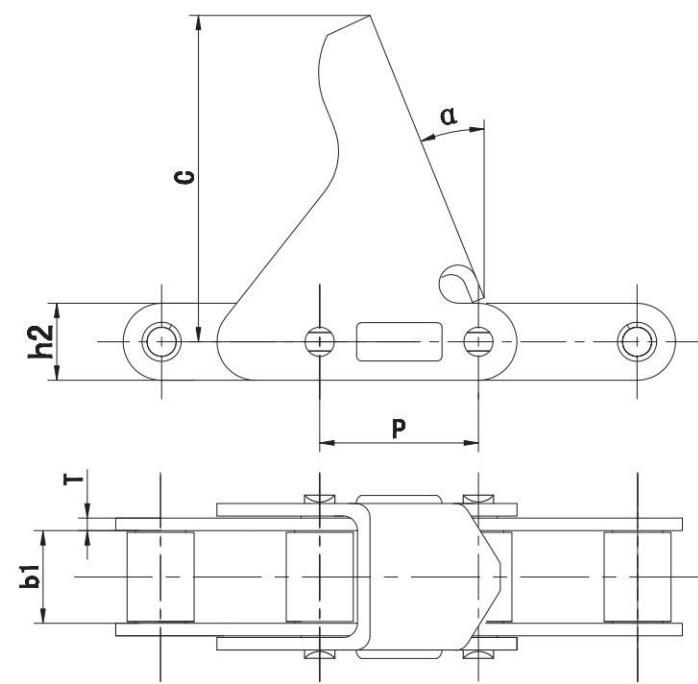


C4E

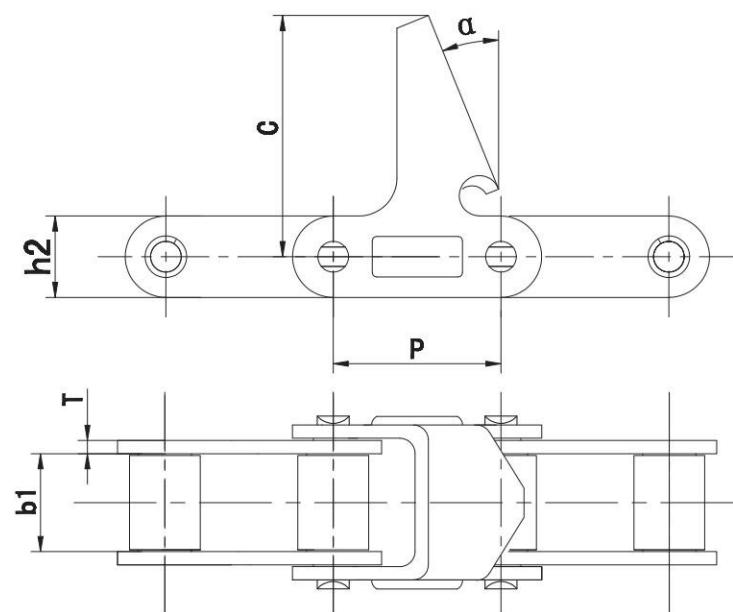


C5E


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	$\alpha$ mm
CA2060H-C2E	38.1	12.57	18.0	3.25	76.2	22.5°
CA2060H-C4E	38.1	12.57	18.0	3.25	75.8	22.5°
CA2060H-C5E	38.1	12.57	18.0	3.25	57.2	22.5°
CA2060H-C6E	38.1	12.57	18.0	3.25	63.5	22.5°

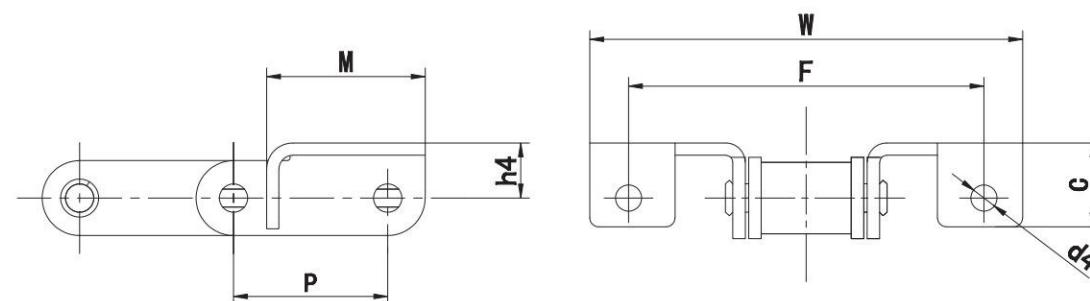


Chain No.	P	b1	M	C	F	W	T	h4	d4
	mm	mm	mm	mm	mm	mm	mm	mm	mm
CA550-F7A	41.40	19.81	44.5	23.3	84.9	106.4	3.25	14.3	8.33
CA550G57	41.40	19.81	44.5	23.3	-	106.4	3.25	14.3	-

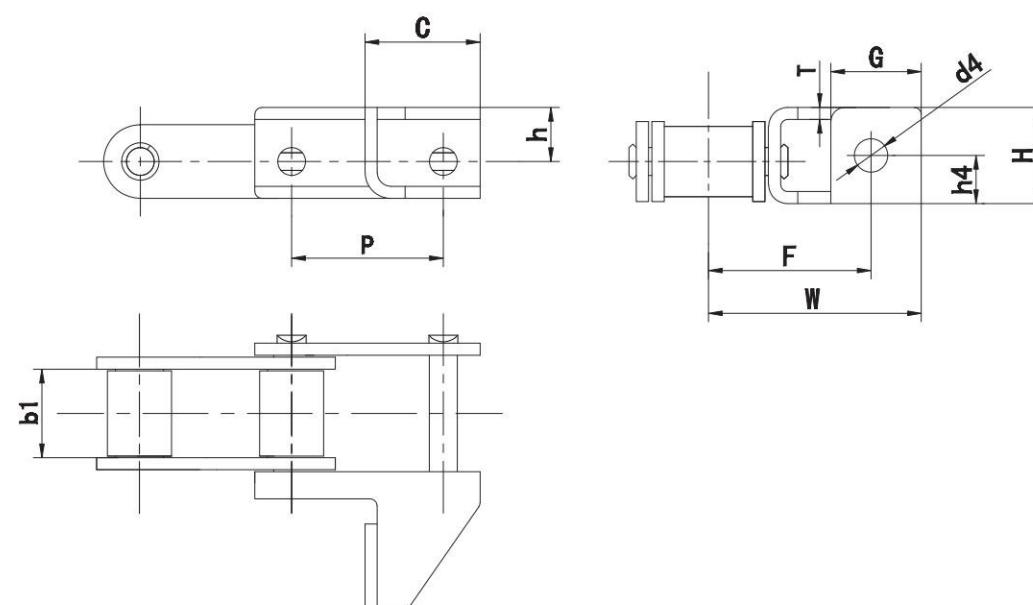


Chain No.	P	b1	C	h	H	G	h4	F	W	T	d4
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CA550-G50	41.40	19.81	23.0	17.5	27.2	30.0	12.9	39.7	57.9	4.0	9.92
CA550-G50S	41.40	19.81	23.0	15.9	25.6	30.0	12.9	39.7	57.9	4.0	9.92

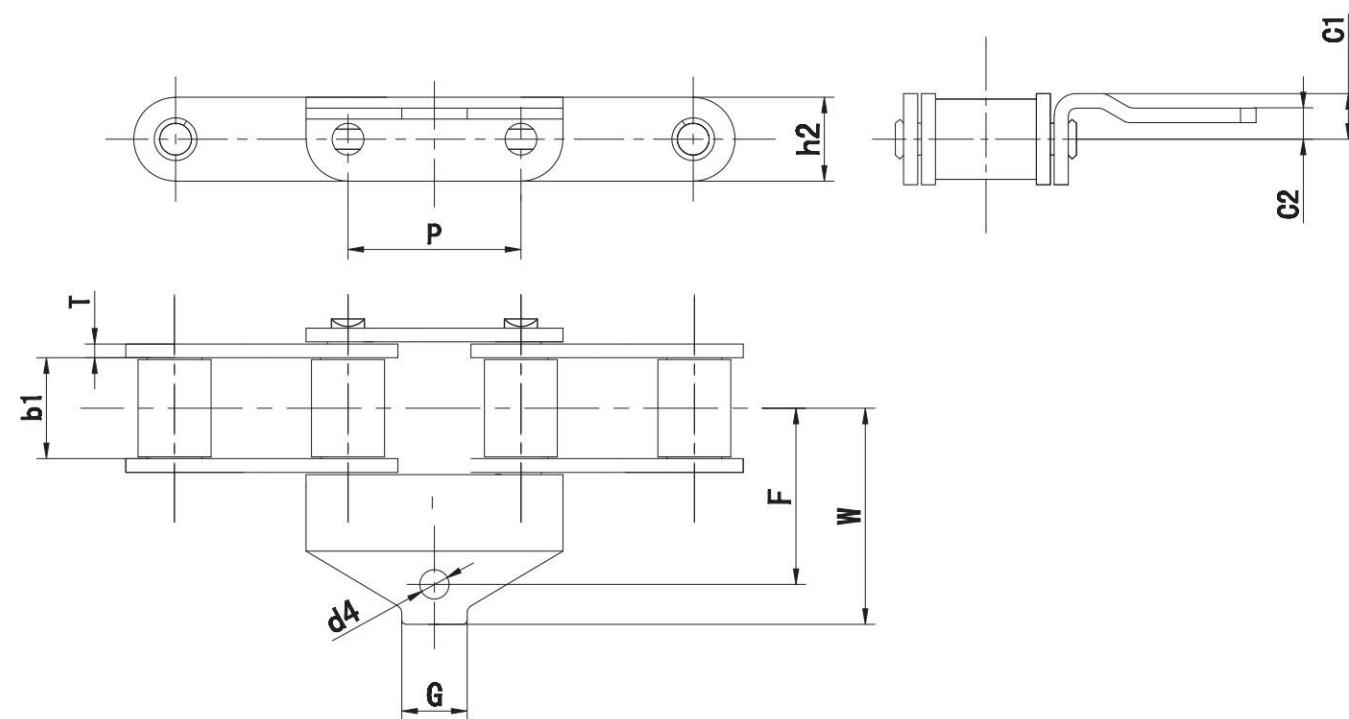


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h2 mm	C1 mm	C2 mm	T mm	d4 mm
CA550AH	41.4	19.81	19.1	37.3	47.6	19.3	9.65	6.4	2.8	8.73

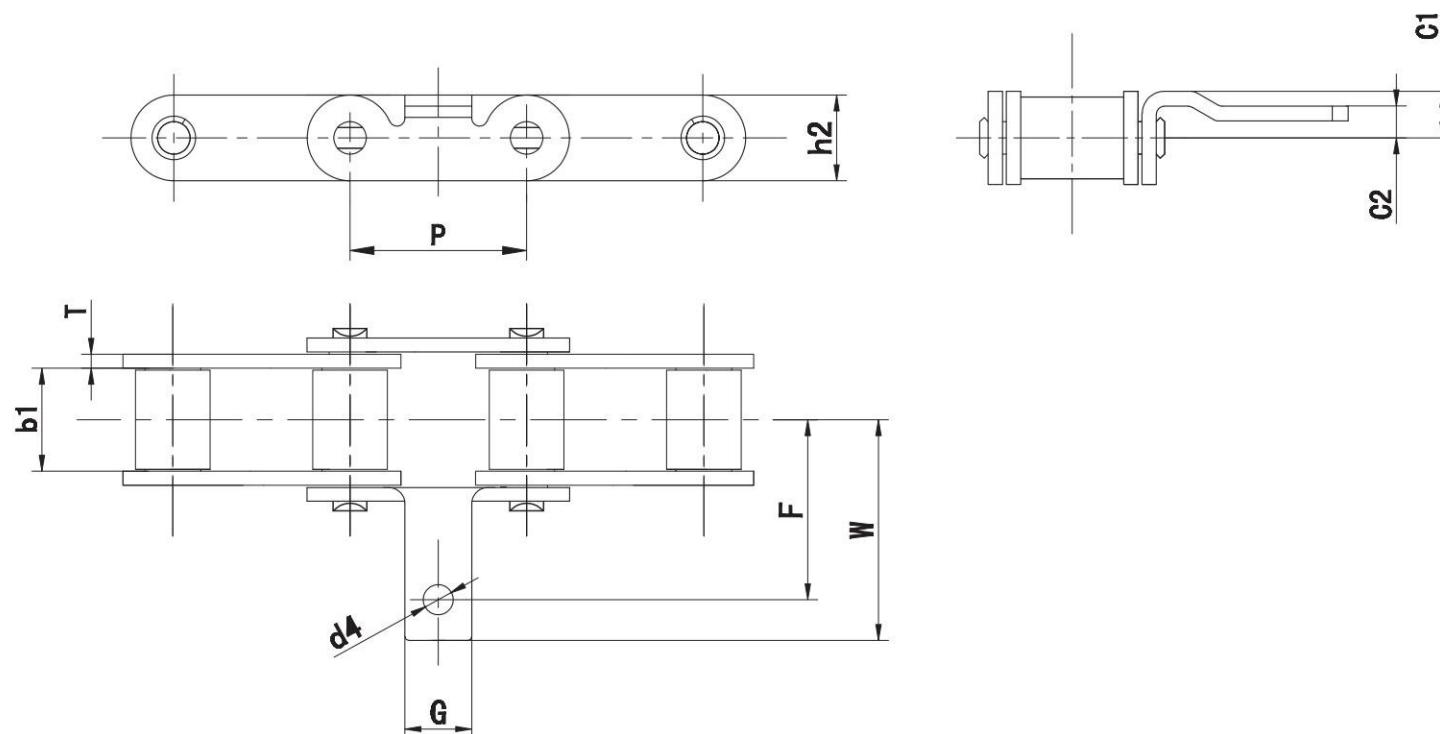


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h2 mm	C1 mm	C2 mm	T mm	d4 mm
CA550AID	41.4	19.81	19.1	37.3	47.6	19.3	9.65	6.4	2.8	8.73

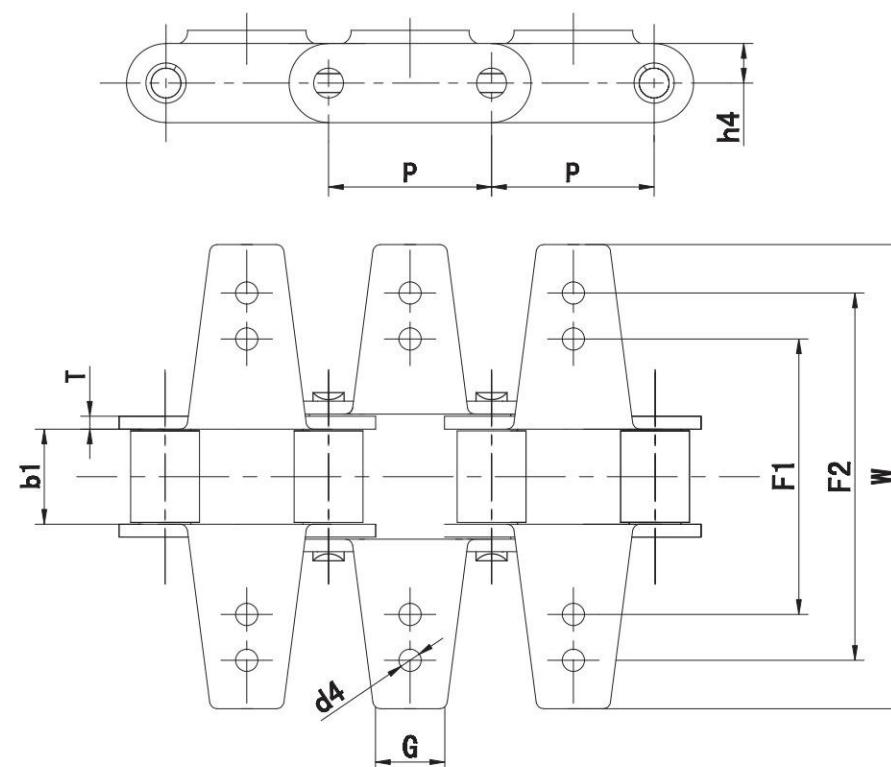


Chain No.	P mm	b1 mm	F2 mm	G mm	F1 mm	W mm	h4 mm	T mm	d4 mm
CA550K6	41.40	19.81	100.1	22.2	68.3	128.6	12.7	2.80	8.33
CA620K12	42.01	24.51	101.7	22.2	69.9	130.2	23.8	3.25	6.75

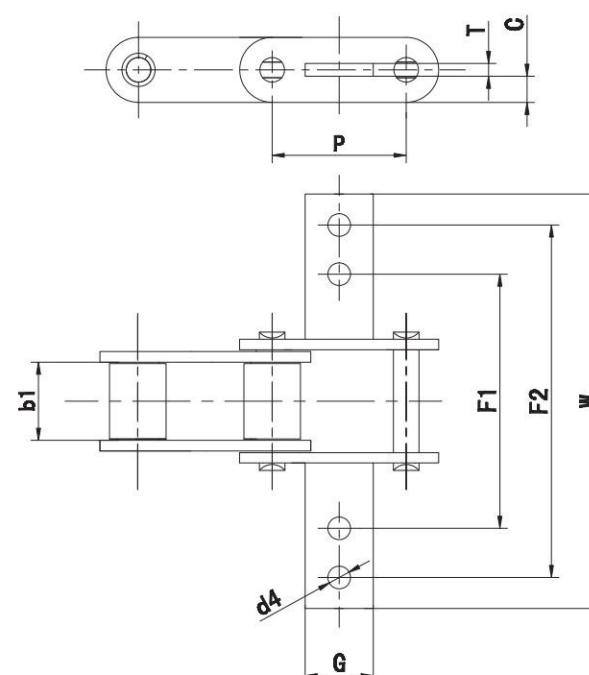


Chain No.	P mm	b1 mm	G mm	F2 mm	F1 mm	W mm	T mm	C mm	d4 mm
CA550K8	41.40	19.81	23.8	101.7	69.9	127.0	4.3	7.1	6.75
CA550K9	41.40	19.81	23.8	101.7	69.9	127.0	4.3	7.9	6.75

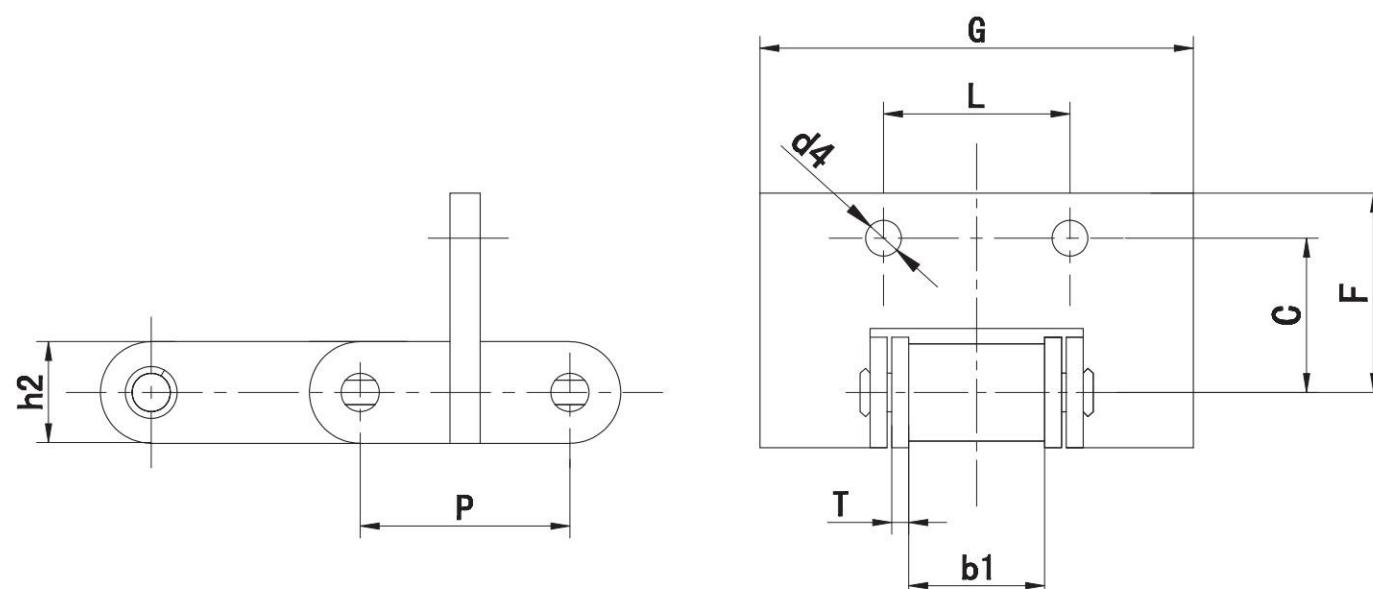


Chain No.	P mm	b1 mm	C mm	F mm	L mm	G mm	h2 mm	T mm	d4 mm
CA550F11	41.40	19.81	22.2	34.9	27.0	82.6	19.3	2.8	5.95

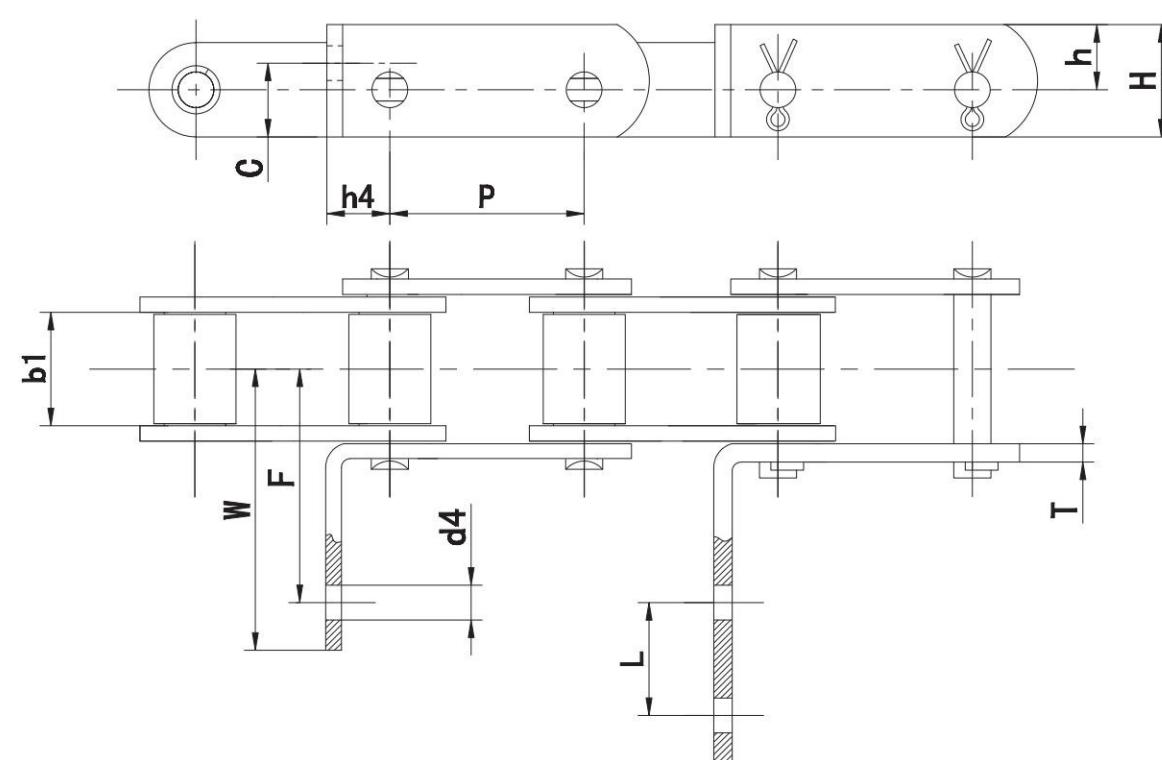

Chain No.	P mm	b1 mm	C mm	h mm	H mm	h4 mm	F mm	L mm	W mm	T mm	d4 mm
CA550-GX	41.4	19.81	14.5	14.3	24.0	15.5	41.7	19.1	73.4	4.00	6.75
CA550-G27	41.4	19.81	14.5	14.3	24.0	15.9	41.7	-	55.2	2.80	8.33
CA550-G27S	41.4	19.81	14.5	14.3	24.0	15.9	41.7	-	55.2	3.25	8.33

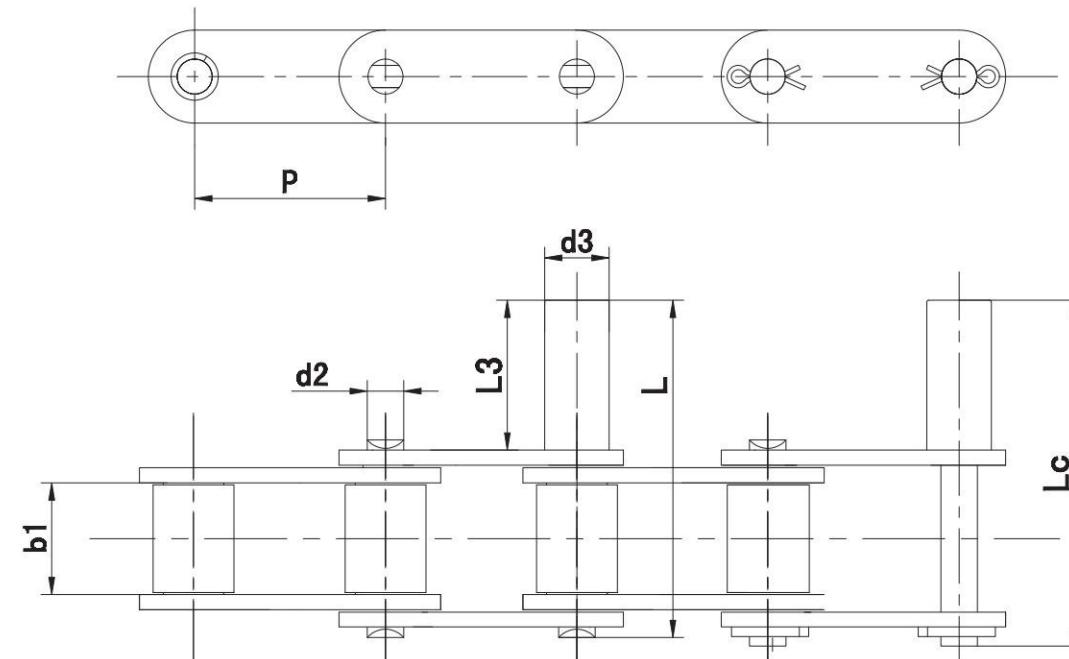


Chain No.	P	b1	d2	d3	L3	L	Lc
	mm	mm	mm	mm	mm	mm	mm
CA550-D1	41.40	19.81	7.19	12.7	50.80	84.5	87.5
S62F4	41.19	26.00	8.00	12.7	40.00	80.8	83.8
S62F6	41.19	25.40	9.00	12.7	40.00	84.8	87.8

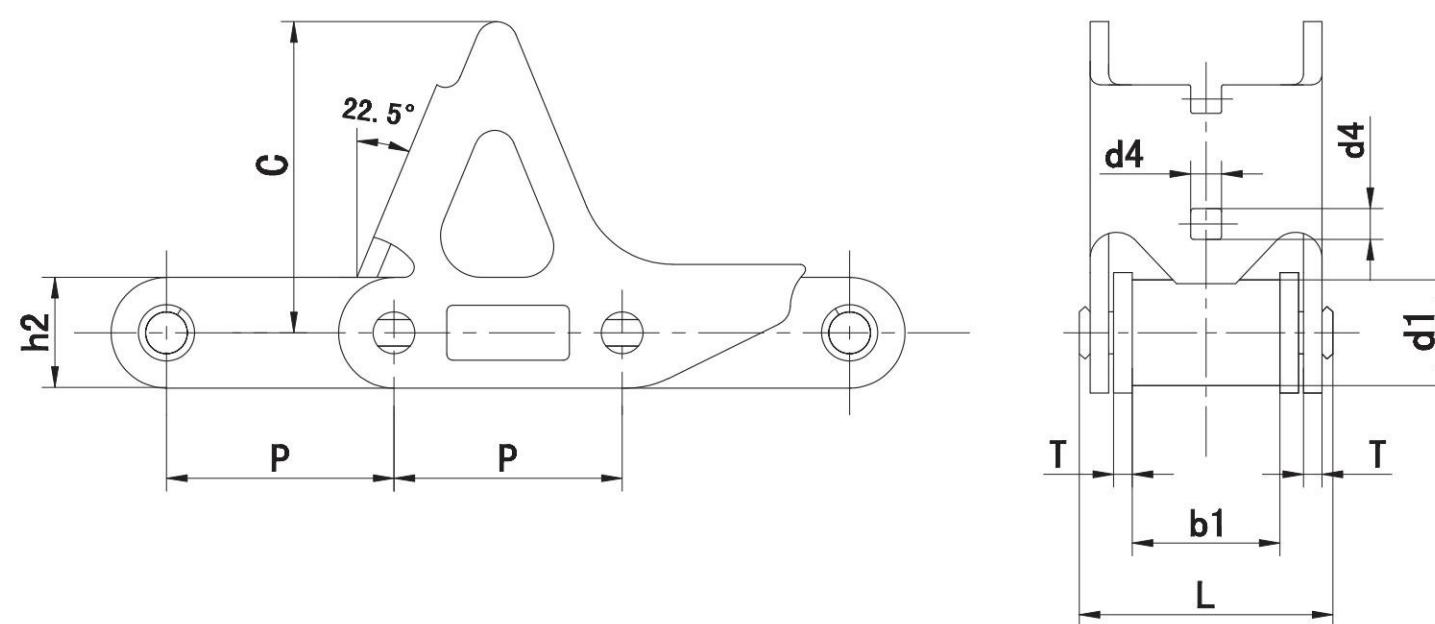


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴长度 Pin Length	链板尺寸 Plate dimension				极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter
	p	d1 max	b1 min	L max	h2	T	C	d4		
	mm	mm	mm	mm	mm	mm	mm		kN/LB	kg/m
55VDF1-CPEF	41.4	17.9	22.5	39.7	23.0	3.0	58	8.1	50/11248	2.68


应用于农业机械设备，一般作为输送用，也可用于传动  
 Using for agricultural machinery and equipment, generally used as a delivery, also can be used for transmission

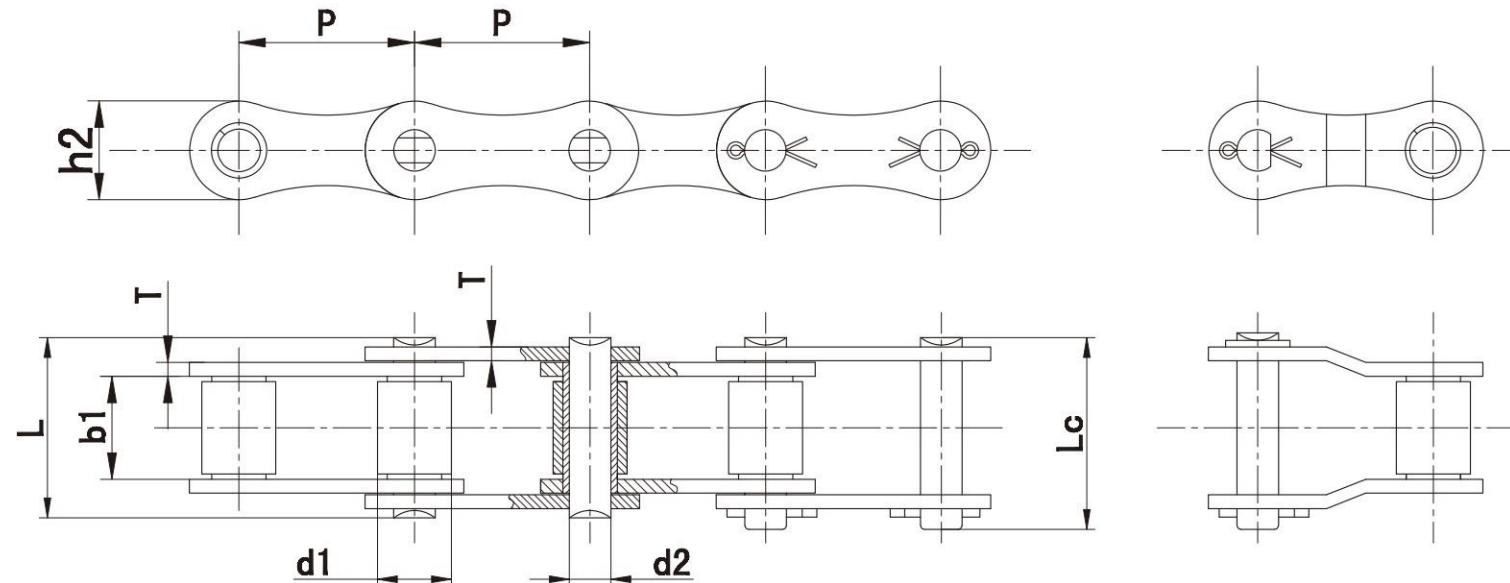


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	每米重量 Weight Per Meter
	p	d1 max	b1 min	d2 max	L max	Lc max	h2 max	T max	Q min	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
S32	29.21	11.43	15.88	4.45	26.7	28.8	13.2	1.8	8.0/1818	21.6	0.86
S32V	29.21	11.43	15.88	5.08	27.3	29.7	13.5	2.1	25.0/5680	27.0	0.96
S42	34.93	14.27	19.05	7.00	34.3	37.0	19.8	2.8	27.0/6136	50.8	1.60
S45	41.40	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.66
S51	38.10	15.24	16.00	7.72	30.9	33.8	17.3	2.8	28.0/6364	30.8	1.48
S52L	38.10	15.24	16.40	5.72	30.9	33.8	16.5	2.5	29.2/6636	32.2	1.36
S52	38.10	15.24	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.68
55V	41.40	17.90	22.23	8.22	39.3	42.4	20.0	3.0	42.0/9546	45.0	2.22
S55	41.40	17.78	22.23	5.72	37.7	40.4	17.3	2.8	18.0/4091	36.1	1.80
S55R	41.40	17.78	22.23	8.90	41.0	44.0	22.4	3.5	45.0/10227	73.1	2.49
S55RH	41.40	17.78	22.23	8.90	43.2	46.4	22.4	4.0	65.0/14227	84.5	2.74
S62	41.91	19.05	26.20	5.72	40.3	43.0	17.3	2.5	26.7/6067	36.1	1.87
S77	58.34	18.26	22.23	8.90	43.2	46.4	26.2	4.0	45.0/10227	73.1	2.66
S88	66.27	22.86	28.58	8.90	49.8	53.0	26.2	4.0	45.0/10227	73.1	3.25
CA642	41.40	15.88	19.00	8.28	36.1	39.1	21.2	3.0	50.0/11363	55.0	1.98
CA650	50.80	25.00	18.90	9.53	40.4	44.7	25.0	4.0	90.0/20454	95.5	3.49
CA650F2	50.8	25.0	19.0	11.28	49.2	53.7	25.0	3.5/5.0	138.0/27273	140.0	4.36

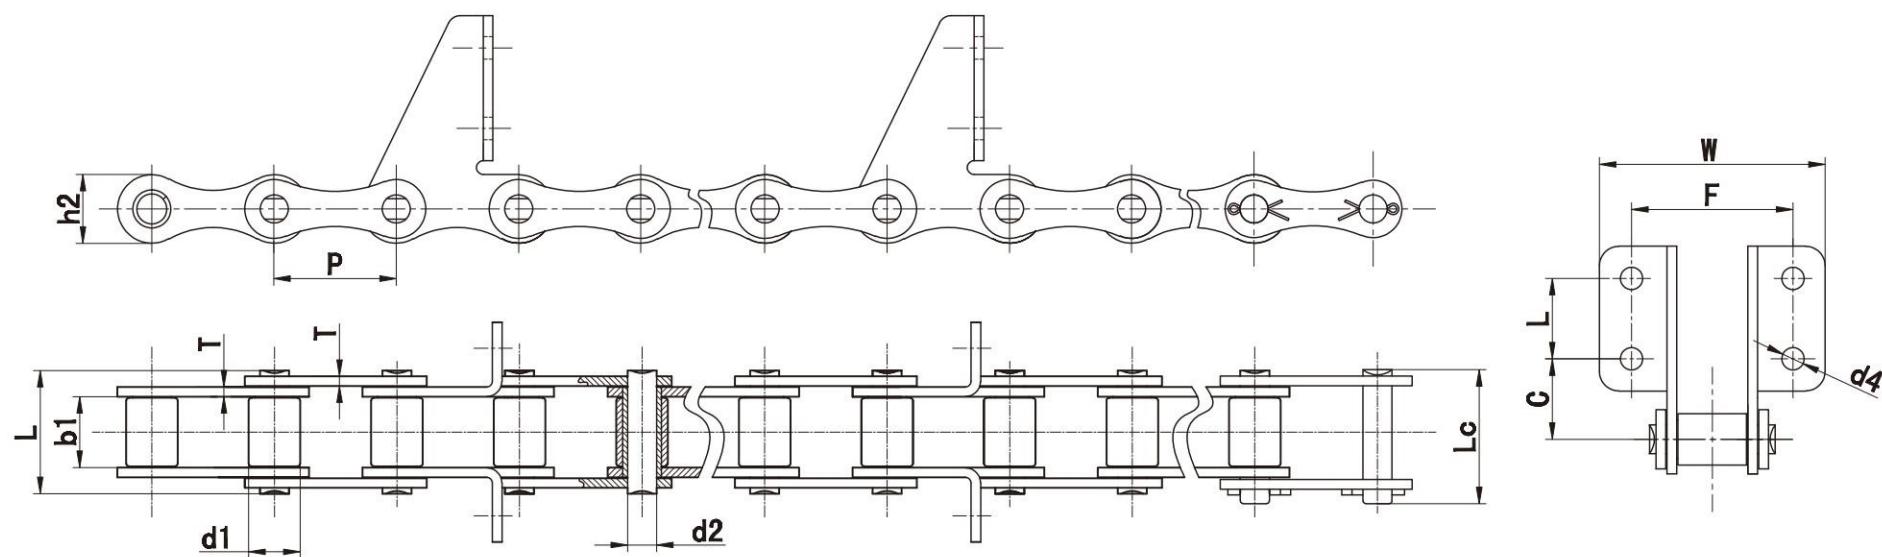


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	每米重量 Weight Per Meter
Chain No.	p	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	L <sub>c</sub> max	h <sub>2</sub> max	T max	Q min	Q <sub>0</sub>
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN
55VF1H2	41.4	17.9	22.23	8.22	45.2	48.4	21.4	3.0	60.0/11858	65.0
CA650F1	50.8	25.0	19.0	11.28	49.2	53.7	25.0	3.5/5.0	138.0/27273	140.0
										4.36

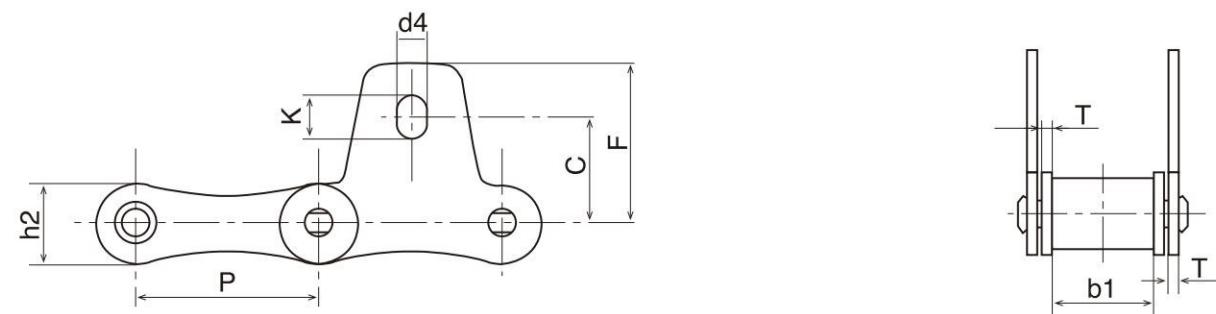


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	F mm	d4 mm	K mm
S32SK1	29.21	15.88	13.2	1.8	17.3	26.2	5.3	6.9
S42SK1	34.93	19.05	19.8	2.8	23.6	34.3	8.3	11.5
S45SK1	42.40	22.23	17.3	2.8	19.8	30.2	8.3	11.5
S52SK1	38.10	22.23	17.3	2.8	22.1	31.8	8.3	9.9
S55SK1	41.40	22.23	17.3	2.8	19.8	30.2	8.3	11.5
S62SK1	41.91	26.2	17.3	2.5	24.6	38.6	8.3	14.7
S77SK1	58.34	22.23	26.2	4.0	36.3	50.0	8.3	11.5
S88SK1	66.27	28.58	26.2	4.0	43.7	55.6	8.3	9.9

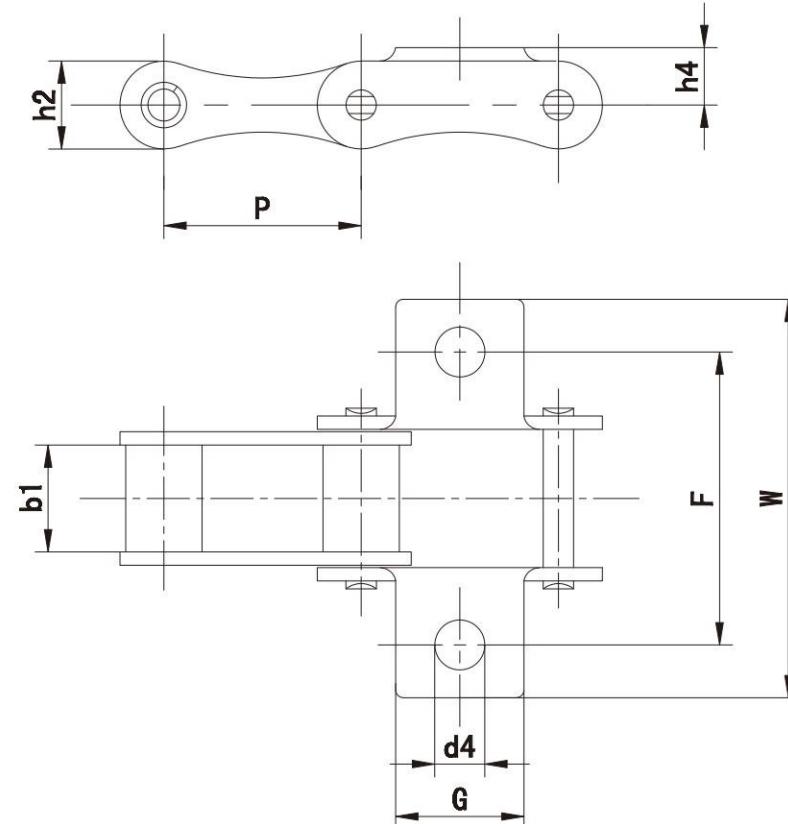


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
S52LK1	38.1	16.4	26.0	50.0	74.0	14.0	9.0
55VK1	41.40	22.23	30.0	58.0	76.0	16.0	9.0

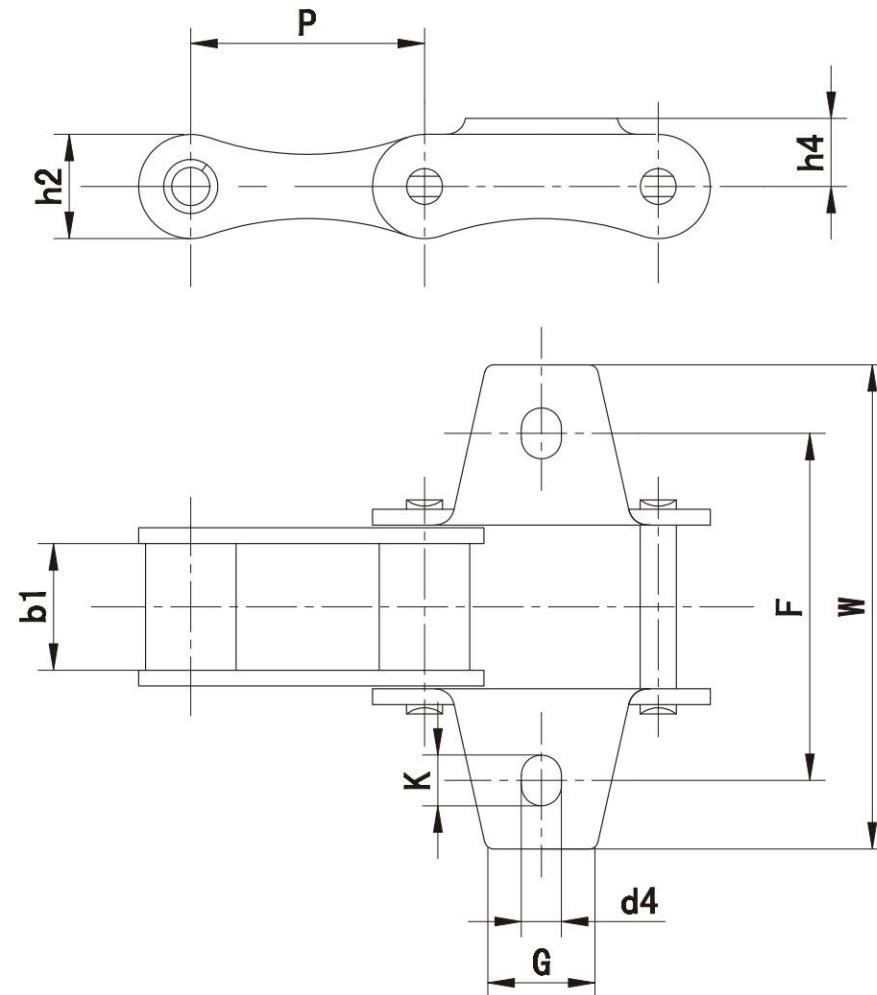


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm	h2 mm
S32K1	29.21	15.88	15.0	42.9	61.0	8.6	5.3	6.9	13.2
S32K1F1	29.21	15.88	15.0	42.9	61.0	8.6	6.5	8.1	13.2
S42K1	34.93	19.05	17.5	54.0	74.9	14.0	8.3	11.5	19.8
S45K1	41.40	22.23	22.0	54.0	75.0	11.4	8.5	11.7	17.3
S51K1	38.10	16.00	19.0	49.8	71.0	11.4	8.3	9.9	17.3
S52K1	38.10	22.23	19.0	58.8	78.0	11.4	8.3	9.9	17.3
S52K1F1	38.10	22.23	19.0	58.8	78.0	11.4	6.6	8.2	17.3
S55K1	41.40	22.23	22.0	54.0	75.0	11.4	8.5	11.7	17.3
S55K1F1	41.40	22.23	22.0	54.0	75.0	11.4	6.5	9.5	17.3
S55HK1	41.40	22.23	34.0	52.7	82.0	13.4	8.4	11.4	20.4
S62K1	41.91	26.20	22.0	66.8	95.4	11.4	8.3	14.7	17.3
S62A2K1	41.91	26.20	22.0	66.7	95.5	12.6	8.3	14.7	17.3
S62F2K1	41.91	26.20	22.0	66.8	95.4	11.4	6.5	13.0	17.3
S62F5A2K1	41.91	26.20	22.0	66.7	95.5	12.6	8.3	14.7	16.7
S77K1	58.34	22.23	25.0	76.2	102.0	20.8	8.3	11.5	26.2
S88K1	66.27	28.58	22.0	97.0	119.4	20.8	8.3	9.9	26.2
S51HF1K1	38.10	16.00	34.0	52.4	84.5	13.0	8.3	9.9	21.0
S88F2K1	66.27	28.58	22.0	97.0	119.4	20.8	8.3	9.9	21.2
S42A1F2	34.93	19.05	23.6	54.0	75.0	14.0	6.9	10.1	19.8
S42F2A1	34.93	19.05	17.5	54.0	75.0	14.0	8.3	11.5	19.8
S88F3K1	66.27	28.58	30.0	97.7	120.0	20.5	8.3	9.9	26.2

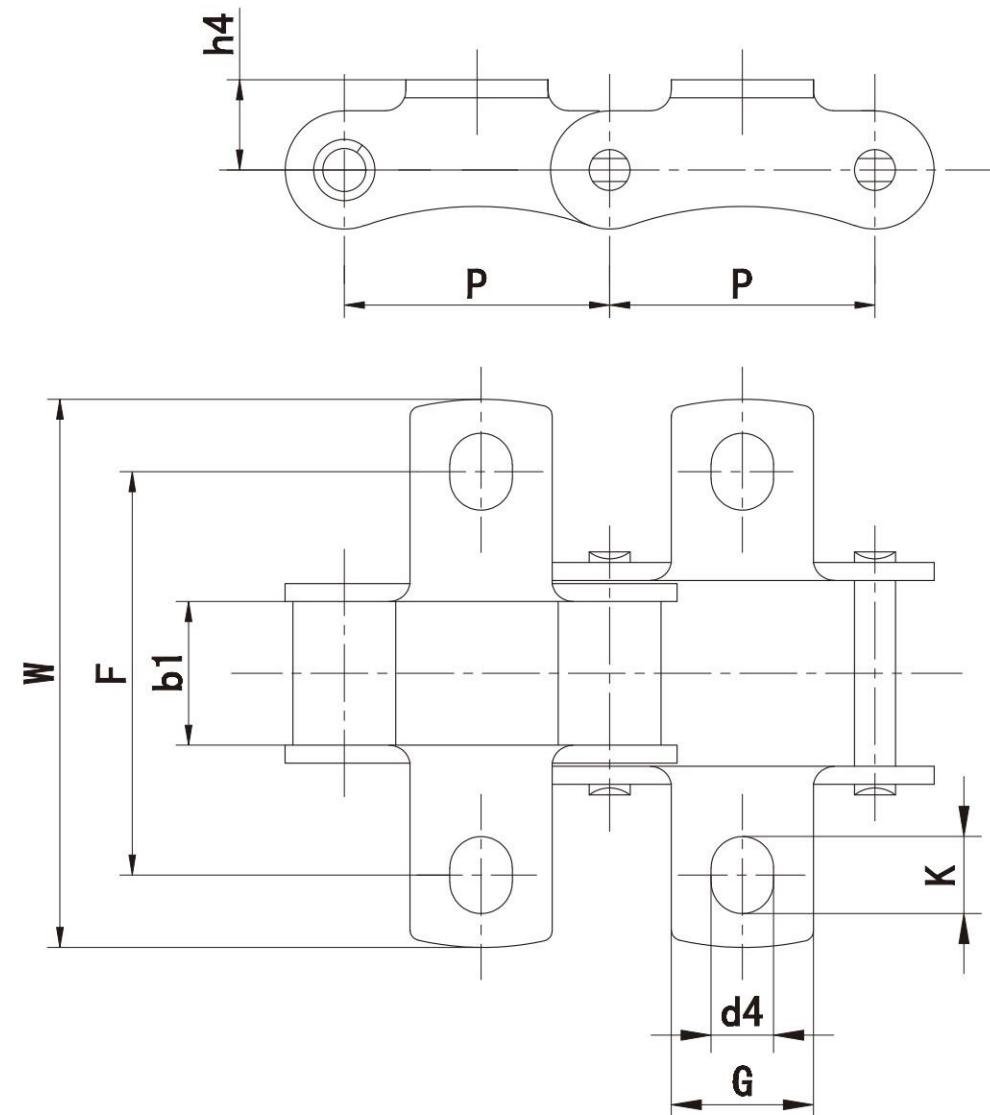

Chain No	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
S55RK1	41.4	22.23	25.0	63.6	90.4	15.5	8.6	12.0
S55RHK1	41.4	22.23	25.0	63.6	90.4	15.5	8.6	12.0


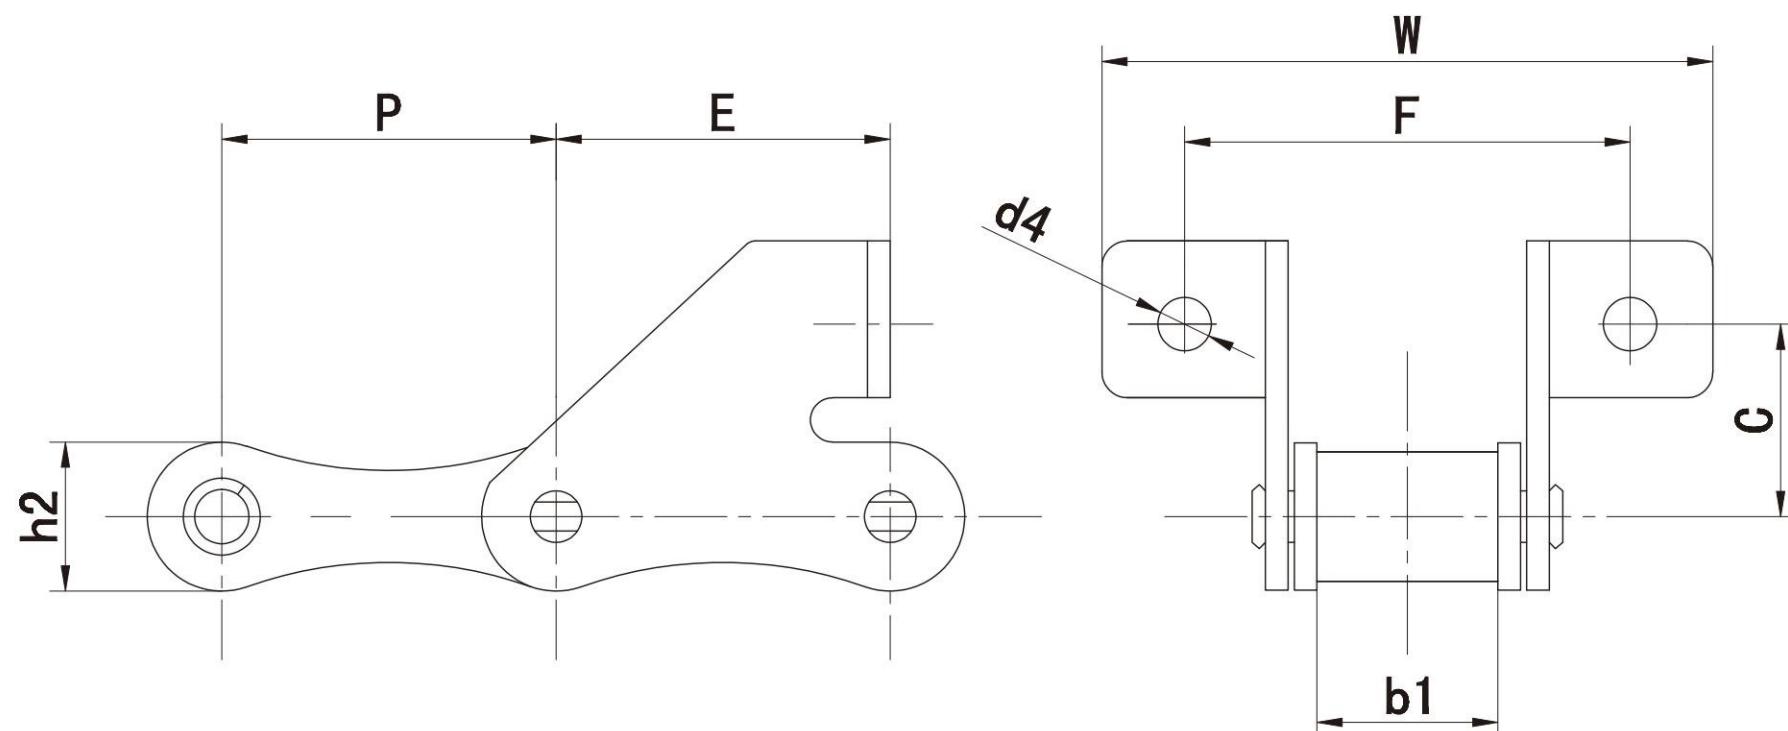


Chain No.	P mm	b1 mm	C mm	E mm	F mm	W mm	d4 mm	h2 mm
S32SD	29.21	15.88	20.0	19.2	58.0	78.0	6.4	13.2
S45W-F1	41.40	22.23	20.0	37.0	58.0	87.0	6.6	17.3
S45W-F4	41.40	22.23	20.5	33.2	58.0	85.6	6.6	17.3
S45F1	41.40	22.23	21.0	25.0	62.4	83.4	8.5	17.3
S45SDF2	41.40	22.23	21.0	28.5	62.4	83.4	8.5	17.3
S52SD	38.10	22.23	20.0	29.2	62.0	88.5	6.4	17.3
S52F4	38.10	15.80	20.6	37.0	53.8	69.5	6.4	16.7
S52F8	38.10	22.23	20.6	37.0	60.7	76.4	6.4	17.3
S52F9	38.10	18.50	20.0	18.5	54.5	71.0	6.5	16.5
S52LSD	38.10	16.40	20.0	17.5	54.5	71.0	6.5	16.5
S52LF2SD	38.10	16.00	20.0	19.0	54.6	76.6	6.5	17.0
F52F12SD	38.10	13.00	20.0	30.0	47.5	83.4	6.4	17.3
S52SDF2	38.10	22.20	20.2	37.2	57.6	86.2	6.5	16.4
S55F2	41.40	22.23	20.0	37.0	58.0	87.0	6.4	17.3
S55F3	41.40	22.23	20.5	33.2	58.0	85.6	6.6	17.3
S55F4	41.40	22.23	20.0	37.0	58.0	87.0	6.6	17.3
S55F6	41.40	22.23	20.0	30.0	58.0	87.0	6.4	17.3
S55F7	41.40	22.23	20.5	33.2	62.0	85.6	6.6	17.3
55VSDF2	41.40	22.23	20.5	33.2	62.0	85.6	8.3	20.0
55VSDF1	41.40	22.23	20.5	33.2	62.0	85.6	6.6	20.0
S55RSDF1	41.40	22.23	20.5	33.2	62.0	85.6	6.6	22.4
S55SDF2	41.40	22.20	20.0	33.4	58.0	86.0	6.6	17.3
S62SD	41.91	26.20	20.0	32.6	61.4	92.0	6.4	17.3

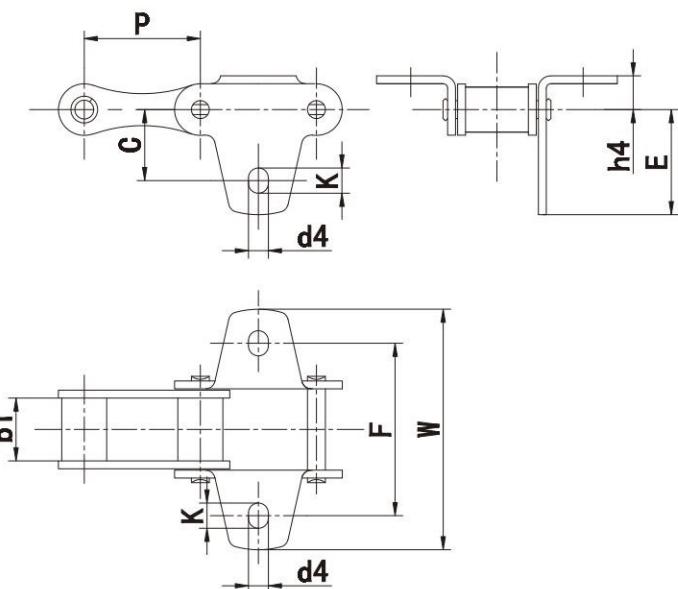


Chain No.	P	b1	C	E	F	W	d4	K	h4
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm	mm
s32F1	41.4	29.21	17.3	26.2	42.9	60	5.3	6.9	8.6


Chain No.	P	b1	G	F	W	h4	d4
Chain No.	mm	mm	mm	mm	mm	mm	mm
S52F1	38.4	18.5	23.0	57.5	80.0	16.0	8.7

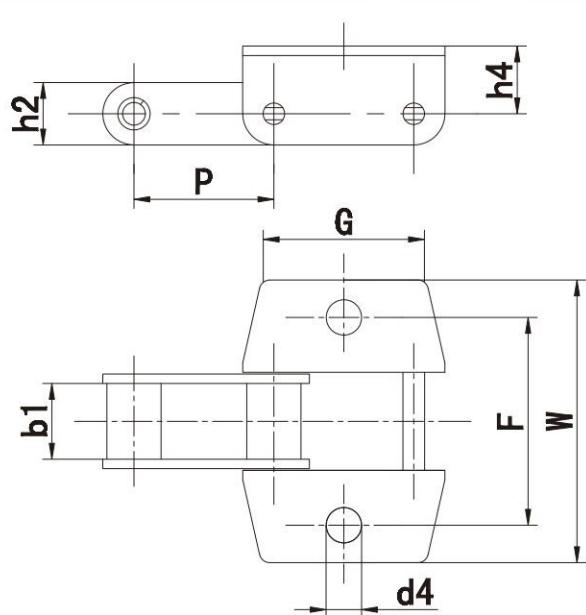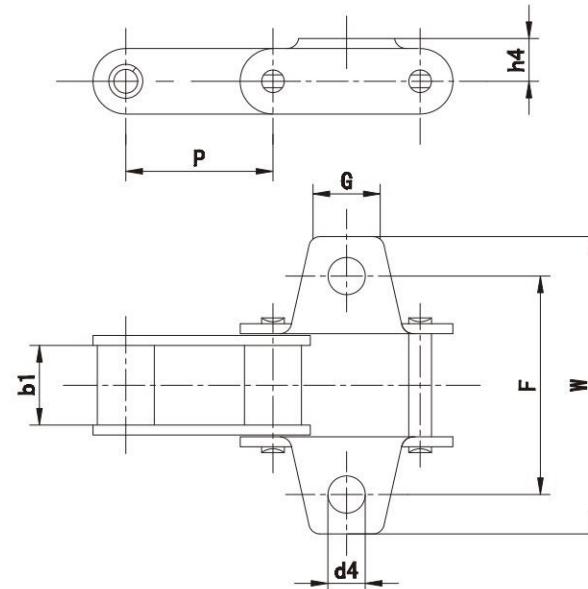


Chain No.	P	b1	G	F	W	h4	d4	h2
Chain No.	mm	mm	mm	mm	mm	mm	mm	mm
S52F2	38.4	18.5	39.0	57.0	80.0	16.0	10.5	17.5
S52F7	38.4	19.05	39.0	58.4	82.4	14.5	10.5	20.5
S52F12	38.1	19.05	39.0	57.5	79.5	14.5	10.0	14.5

Chain No.	P	b1	G	F	W	h4	d4
Chain No.	mm	mm	mm	mm	mm	mm	mm
S52F6	38.4	22.23	19.0	51.2	71.7	16.5	8.3

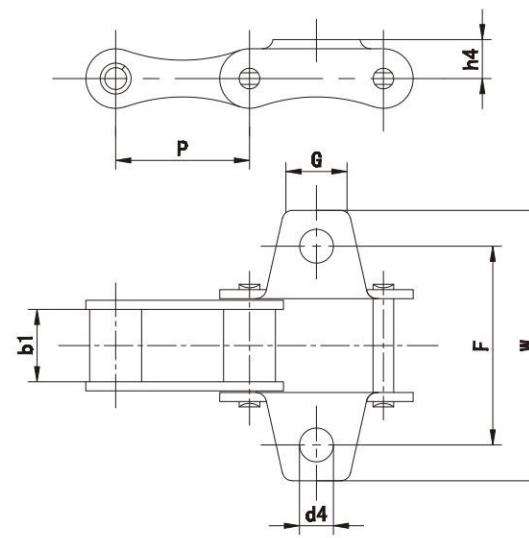


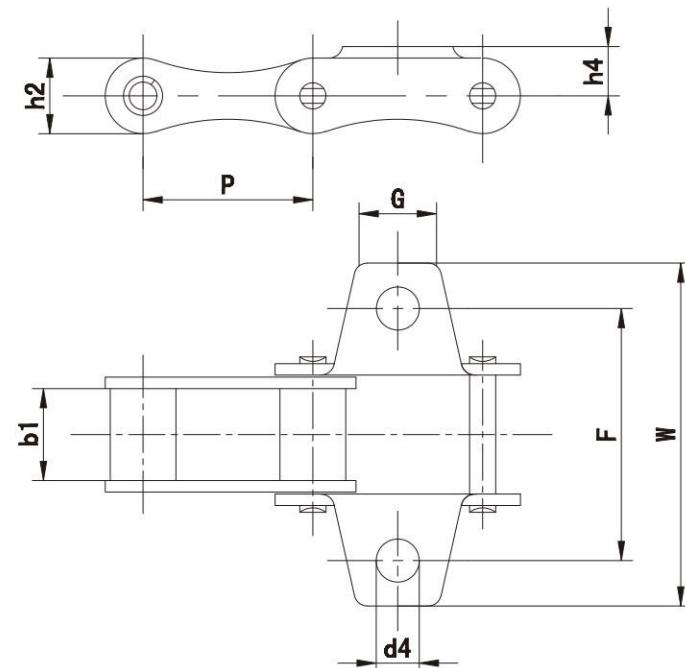


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	h2 mm
S32K1F2	29.21	15.88	15.0	42.9	61.0	8.6	5.3	13.2
S52K1F2	38.10	22.23	22.0	58.7	76.5	11.4	8.5	17.3
S45K1F1	41.40	22.23	22.0	51.0	75.0	11.4	7.2	17.3
55VK1F1	41.40	22.23	22.0	56.0	75.0	16.0	10.0	20.0
S55F5	41.40	22.23	22.0	56.0	75.0	11.4	10.0	17.3
S77K1F1	58.34	22.23	26.0	76.2	103.8	20.8	10.5	26.2
S55K1F2	41.40	22.23	22.0	55.0	75.0	11.4	8.5	17.3

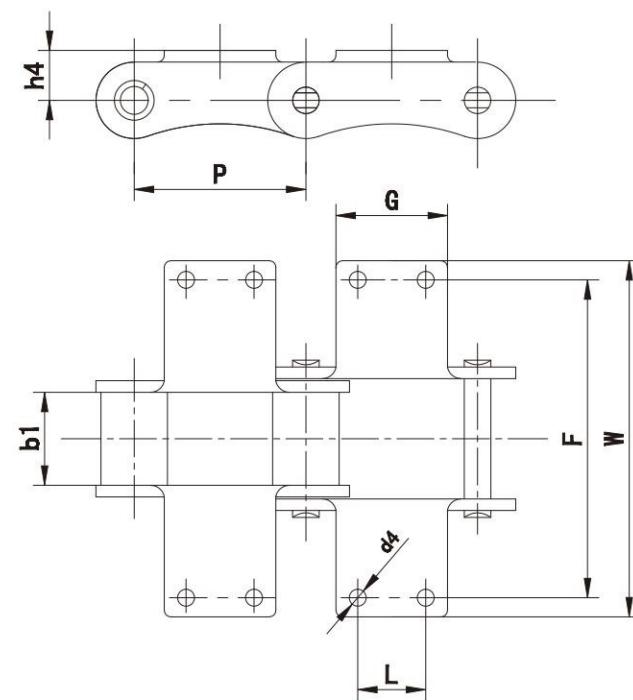


Chain No.	P mm	b1 mm	L mm	G mm	F mm	W mm	h4 mm	d4 mm
S88K2F1	66.27	28.58	28.6	47.6	97.0	117.4	20.8	9.2
S62K2F1	41.91	26.20	19.1	35.0	66.8	95.4	11.4	8.3

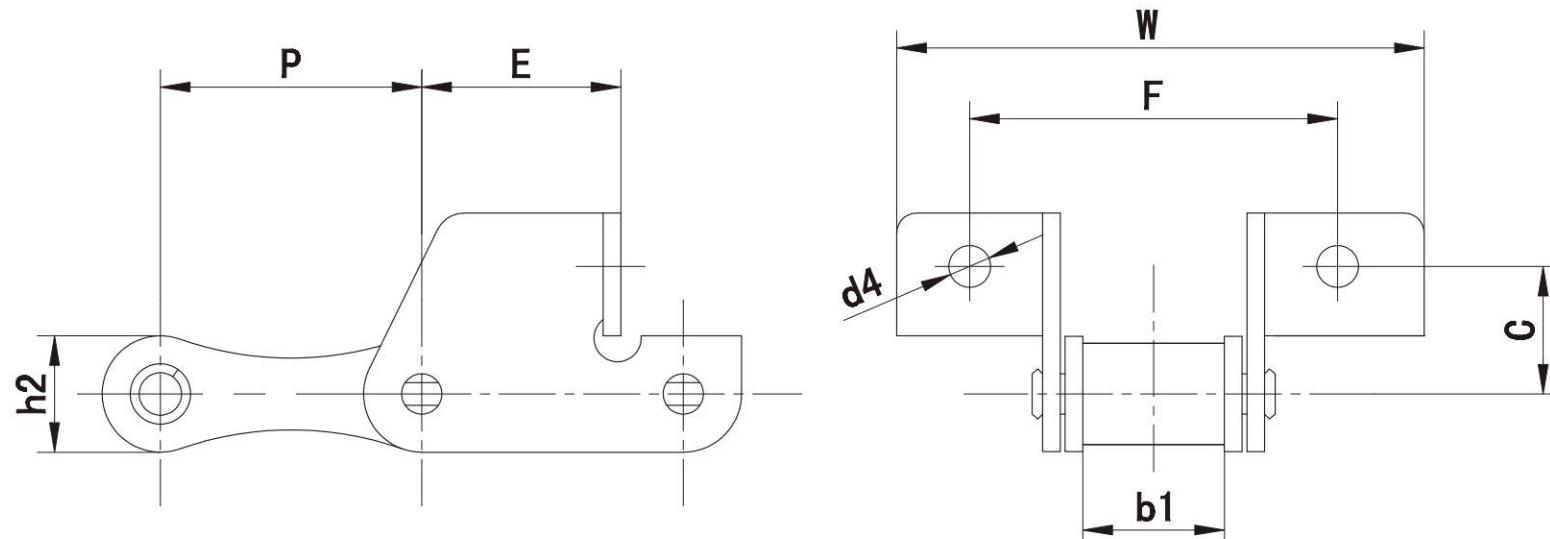


Chain No.	P mm	b1 mm	C mm	E mm	F mm	W mm	d4 mm	h2 mm
S45V	41.4	22.23	21.0	28.5	62.4	83.4	8.8	17.3
S45SDF1	41.4	22.23	17.5	31.9	62.0	91.0	8.5	17.3
S55V	41.4	22.23	21.0	28.5	57.5	83.4	6.5	17.3
S55SDF1	41.4	22.23	20.0	31.9	58.0	89.2	6.5	17.3
S45SDF3	41.4	22.23	16.5	31.9	62.0	91.0	8.5	17.3

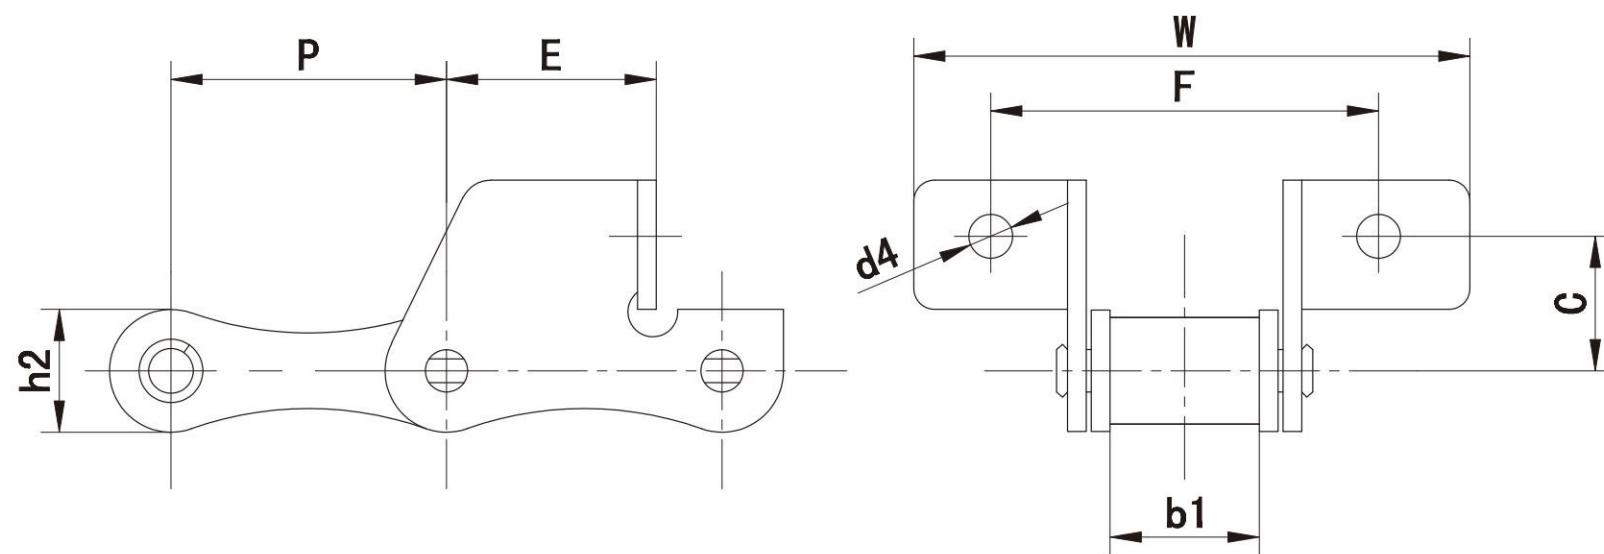


Chain No.	P mm	b1 mm	C mm	E mm	F mm	W mm	d4 mm	h2 mm
S45SD	41.4	22.23	17.00	28.6	58.0	81.2	8.5	17.3
S52SDF1	38.1	15.80	19.56	20.0	56.0	82.0	6.4	17.3

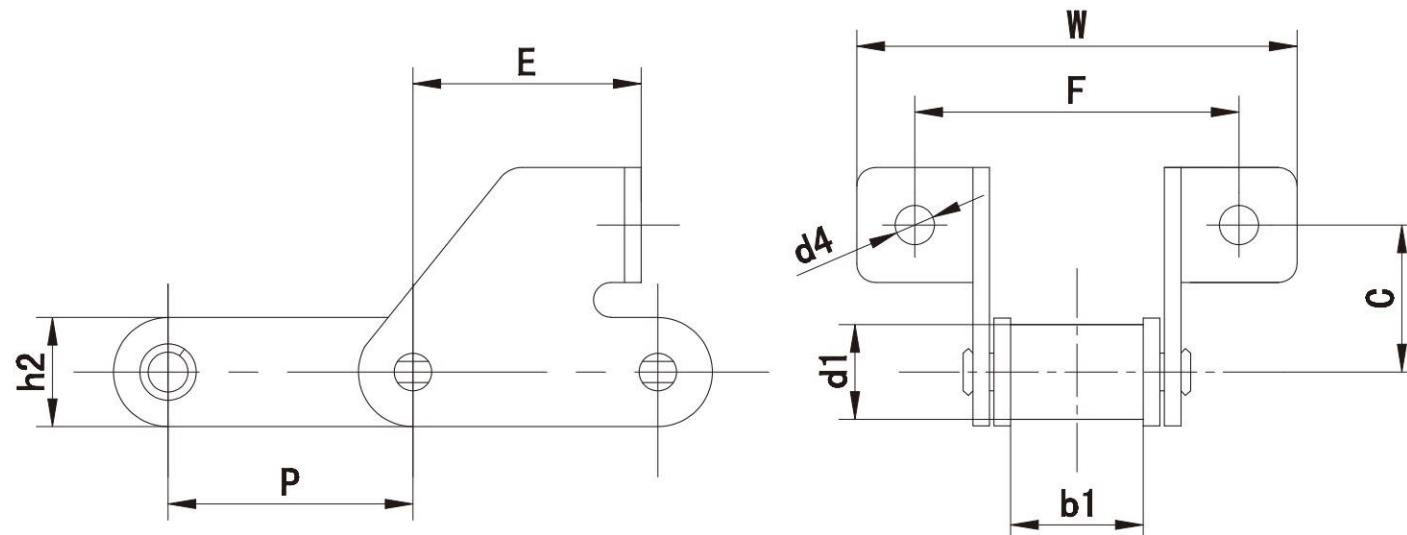

Chain No.	P mm	d1 mm	b1 mm	C mm	E mm	F mm	W mm	d4 mm	h2 mm
S52F11SD	38.1	16.00	17.50	21.0	23.0	55.0	75.0	8.3	20.0
S52F3	38.4	15.88	18.50	24.0	37.4	52.0	73.0	8.7	17.5
C45F1SD	41.4	15.24	22.23	19.7	41.7	58.0	90.0	6.6	17.3

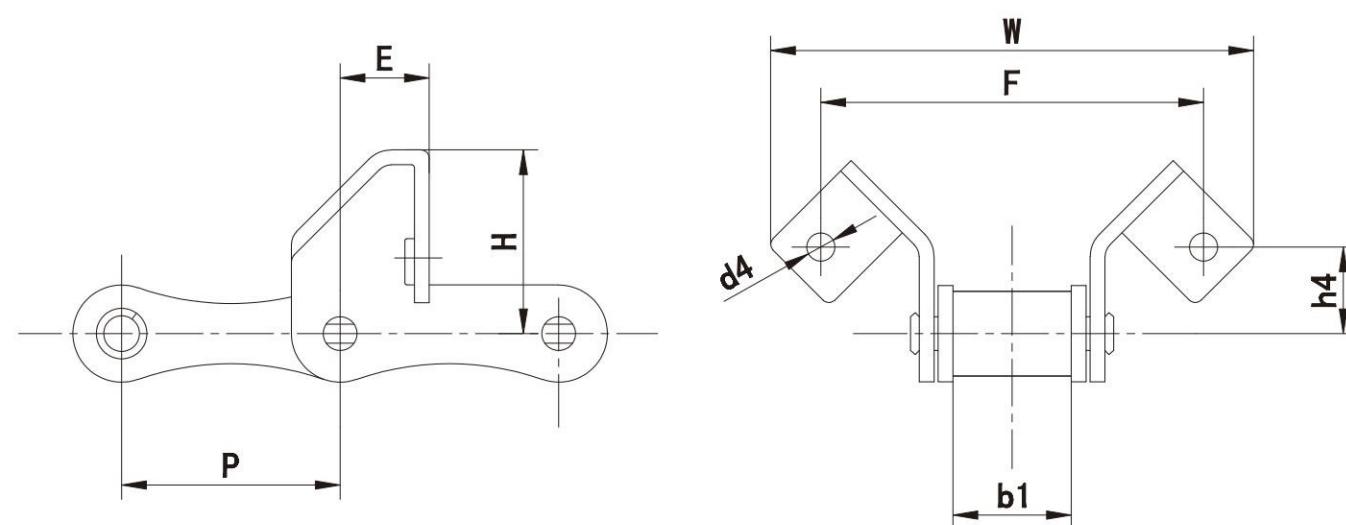


Chain No.	P mm	b1 mm	H mm	E mm	F mm	W mm	h4 mm	d4 mm
55VSE	41.4	22.23	41.0	17.5	88	118	18.44	8.4
55VSEL	41.4	22.23	41.0	31.3	88	118	18.44	8.4
55VSEF1	41.4	22.23	40.0	25.0	88	118	18.00	8.4
CA645SE	41.4	22.23	40.0	17.5	88	118	18.00	8.4

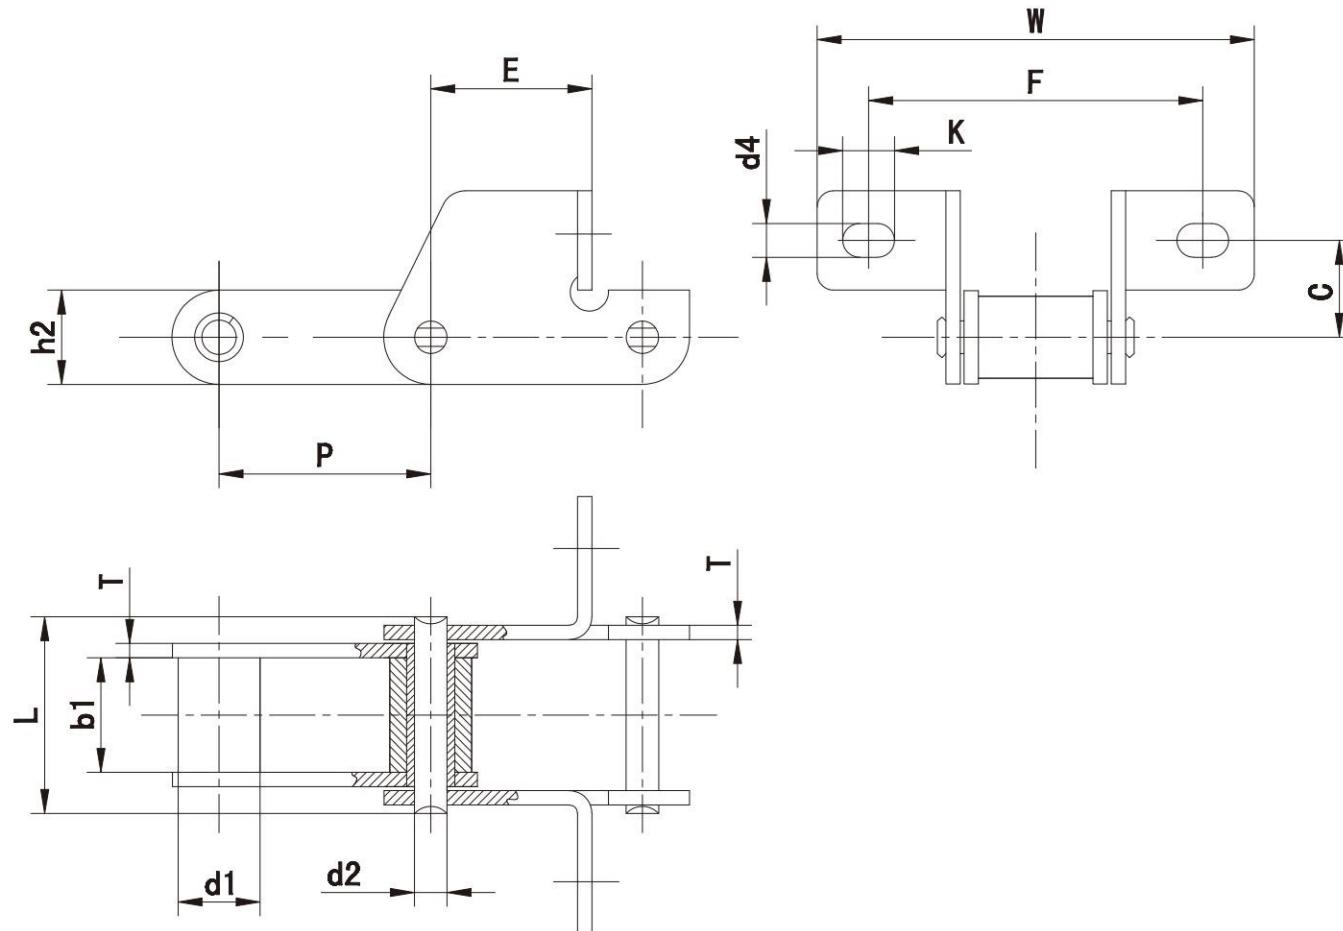


Chain No.	P mm	C mm	E mm	F mm	W mm	d4 mm	K mm
S55F9SD	41.4	20.5	33.4	62.0	85.4	6.7	10.7

Chain No.	节距 Pitch mm	滚子直径 Roller Diameter mm	内节内宽 Width between Inner Plates mm	销轴直径 Pin Diameter mm	销轴长度 Pin Length mm	内链板高度 Inner Plate Depth mm	链板厚度 Plate Thickness mm	极限拉伸载荷 Ultimate Tensile Strength kN/LB	每米重量 Weight Per Meter kg/m
Chain No.	p mm	d <sub>1</sub> max mm	b <sub>1</sub> min mm	d <sub>2</sub> max mm	L max mm	h <sub>2</sub> max mm	T max mm	Q min kN/LB	q kg/m
S55F9SD	41.4	17.78	22.2	7.14	37.0	19.8	2.8	35.0/7873	2.7

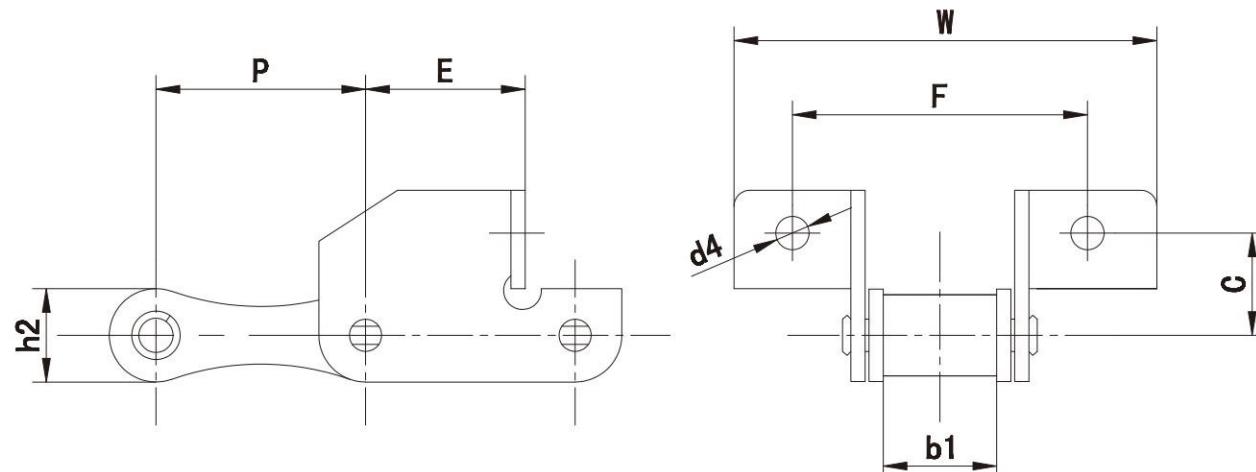


Chain No.	P mm	b1 mm	C mm	E mm	F mm	W mm	d4 mm	h2 mm
S55F1	41.4	22.23	19.0	31.9	62.0	89.2	8.3	17.3
S55RSD	41.4	22.23	19.0	31.9	62.0	89.2	8.3	22.4
S55SDF3	41.4	22.23	17.2	31.9	62.0	92.0	8.3	17.3
S55HSDF1	41.4	22.23	20.6	41.8	64.0	91.0	8.4	20.4
S55RHSDF1	41.4	22.23	25.4	31.5	71.0	101.0	8.5	22.4
S55F10SD	41.4	22.23	20.0	30.0	57.0	90.1	6.5	17.3

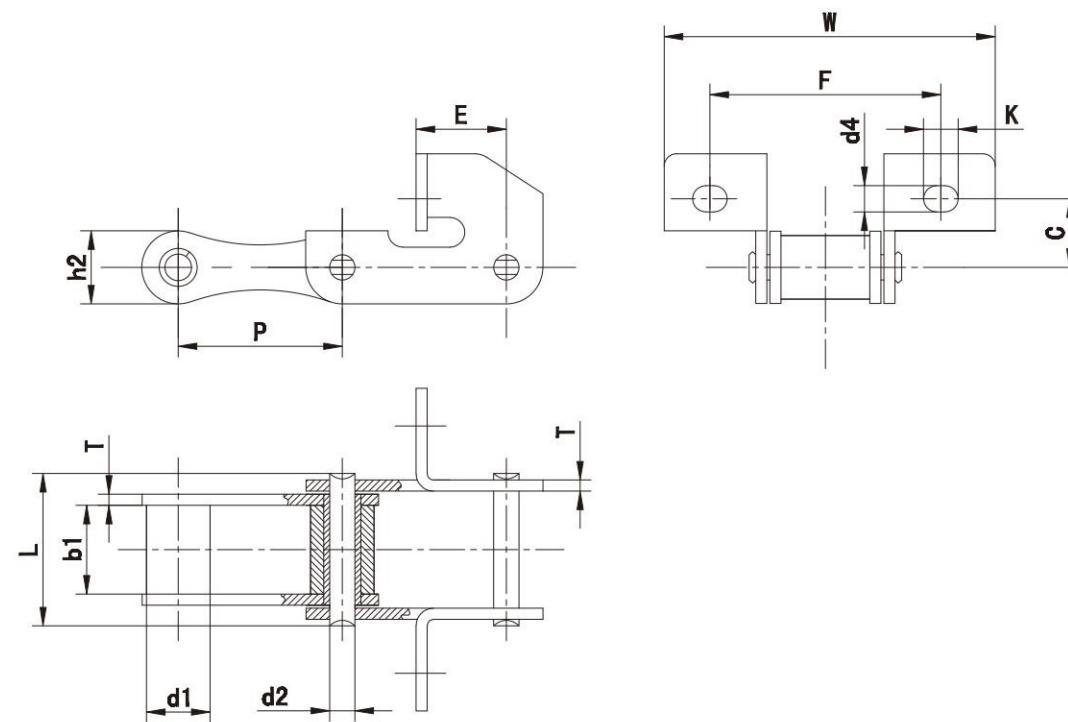


Chain No.	P mm	C mm	E mm	F mm	W mm	d4 mm	K mm
S45HF1	41.4	17.50	24.9	63.4	92.0	8.3	9.2
S55HSD	41.4	20.60	32.5	64.0	91.0	7.5	10.7

Chain No.	节距 Pitch mm	滚子直径 Roller Diameter mm	内节内宽 Width between Inner Plates mm	销轴直径 Pin Diameter mm	销轴长度 Pin Length mm	内链板高度 Inner Plate Depth mm	链板厚度 Plate Thickness mm	极限拉伸载荷 Ultimate Tensile Strength kN/LB	每米重量 Weight Per Meter kg/m
S45HF1	41.4	15.24	22.23	7.14	39.5	17.3	3.0	36.75/8267	2.0
S55HSD	41.4	17.78	22.23	8.28	39.5	20.4	3.0	45.0/10122	2.9

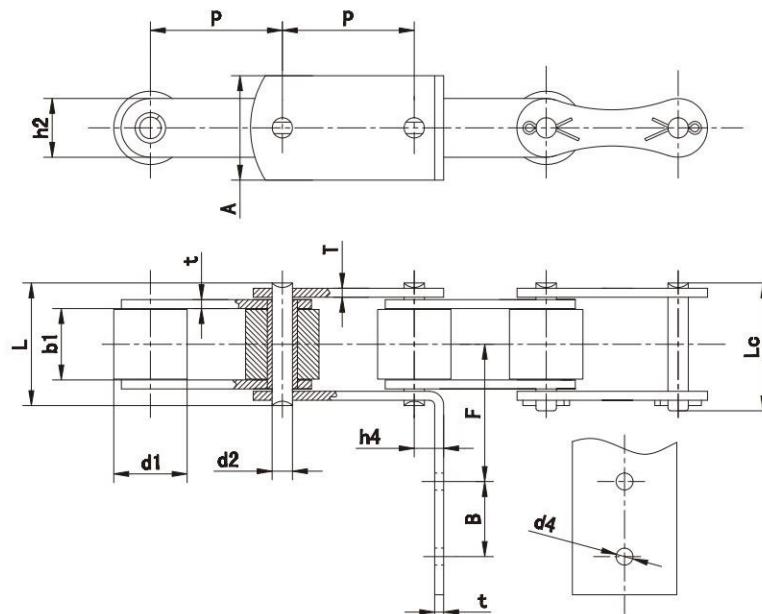


Chain No.	P mm	A mm	B mm	F mm	h4 mm	d4 mm
S55HF2	41.4	39.0	50	61.0	11.8	8.3
S55HF1	41.4	30.0	30	32.0	13.5	6.5

Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter	
Chain No.	p mm	d <sub>1</sub> max mm	b <sub>1</sub> min mm	d <sub>2</sub> max mm	L max mm	L <sub>c</sub> max mm	h <sub>2</sub> max mm	t/T max mm	Q min kN/LB	q kg/m
S55HF2	41.4	23.00	22.23	8.28	42.0	45.5	20.0	4.0/3.0	47.5/10685	4.27
S55HF1	41.4	17.78	22.23	8.28	39.5	42.8	20.4	3.0	45/10122	2.90


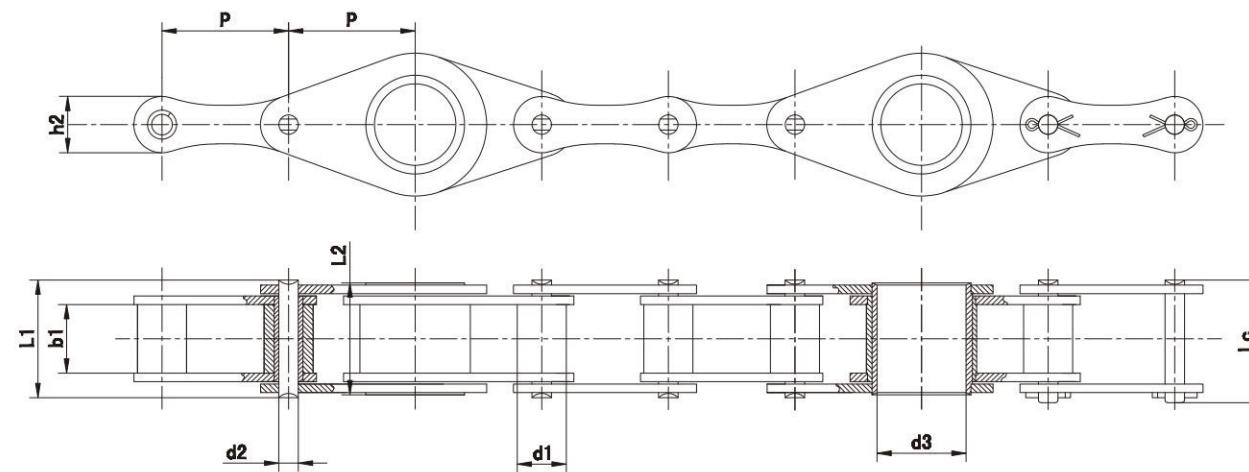


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	空心销轴内直径 Hollow pin inner diameter	销轴长度 Pinlength			内链板高度 inner plate depth	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength
Chain No.	p mm	d <sub>1</sub> max mm	b <sub>1</sub> min mm	d <sub>2</sub> max mm	d <sub>3</sub> max mm	L <sub>1</sub> mm	L <sub>2</sub> mm	L <sub>c</sub> mm	h <sub>2</sub> mm	Q min kN/LB	Q <sub>0</sub> kN
216BF1	50.8	15.88	17.02	8.28	35.3	37.8	35.8	41.3	22.0	60.0/13636	70.8
CA650F3	50.8	19.05	19.05	9.53	35.3	40.4	37.8	44.7	25.0	90.0/20454	99.0

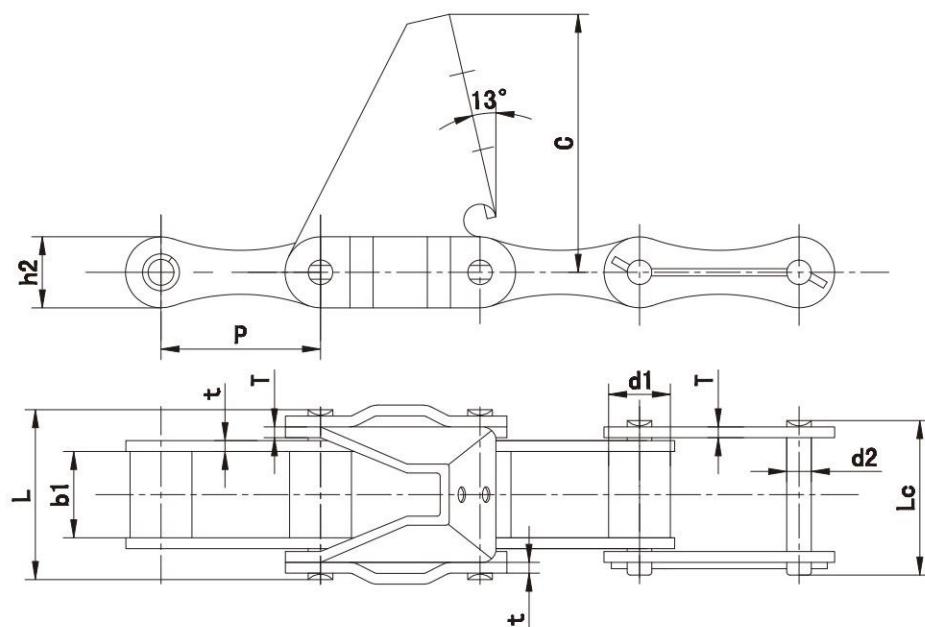


Chain No.	节距 Pitch		滚子直径 Roller Diameter		内节内宽 Width between Inner Plates		销轴直径 Pin Diameter		销轴长度 Pin Length		链板尺寸 Plate dimension			极限拉伸载荷 Ultimate Tensile Strength		平均拉伸载荷 Average Tensile Strength						
	p	mm	d1 max	mm	b1 min	mm	d2 max	mm	L max	mm	Lc max	mm	h2	mm	t/T	mm	C	mm	Q min	kN/LB	Q <sub>0</sub>	kN
	S62R-C6E	41.91		19.05		25.8		8.5		47.8		44.6		20.1		2.8/3.0		66.0		42.0/9448		43.7


Chain No.	P	b1	C	$\alpha$	L	T	h2
	mm	mm	mm	mm	mm	mm	mm
S62F1	41.91	25.4	60.0	50°	41.9	3.0	20.0

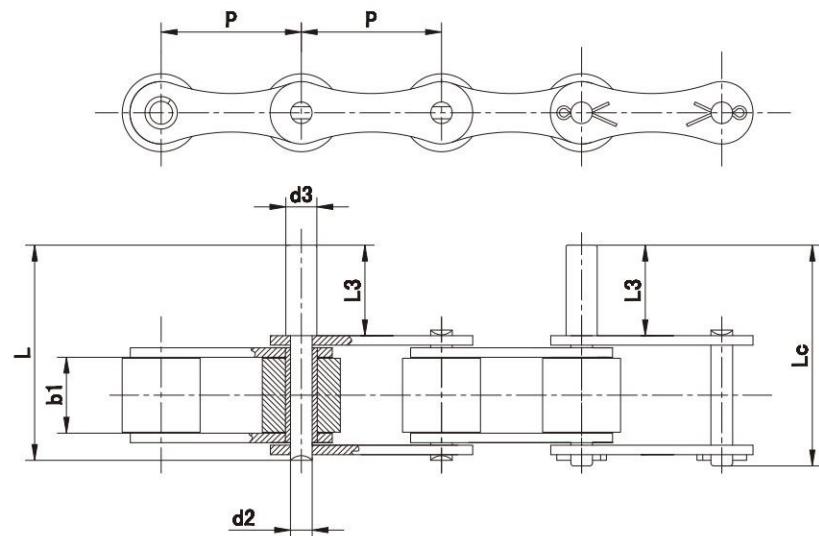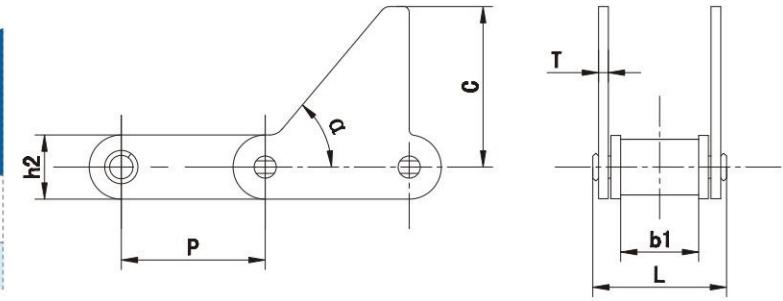


Chain No.	P	b1	d2	d3	L3	L	Lc
	mm	mm	mm	mm	mm	mm	mm
S62-D4	41.91	26.20	5.72	10.00	35	73.8	76.5
S42-D1F1	34.93	19.05	7.00	9.95	25	58.0	61.0
S42-D2	34.93	19.05	7.00	10.00	30	63.0	65.7
S62-D3F1	41.91	26.20	5.72	5.72	18	56.8	59.5

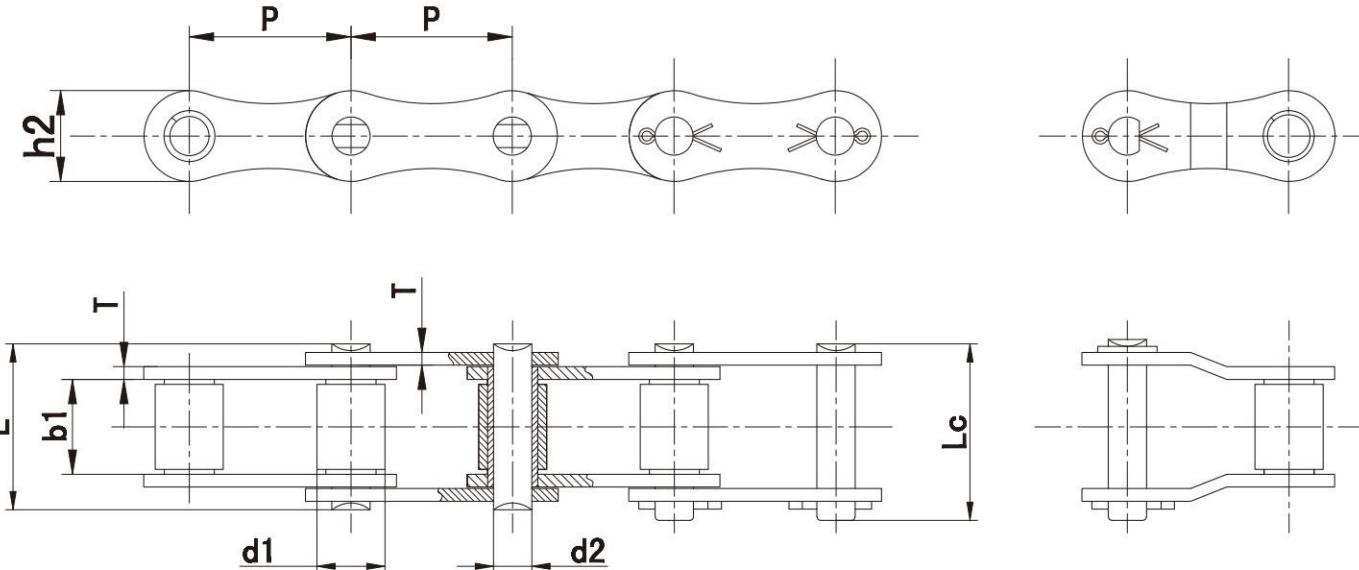


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	每米重量 Weight Per Meter
Chain No.	p	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	L <sub>c</sub> max	h <sub>2</sub> max	T max	Q min	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
A550	41.40	16.87	19.81	7.19	35.00	38.00	19.30	2.80	39.10/8886	51.2	1.79
A555	41.40	16.87	12.70	7.19	29.10	32.00	19.30	3.10	39.10/8886	56.0	1.60
A557	41.40	17.78	20.24	8.00	37.40	40.60	23.10	3.10	55.61/12639	74.3	2.45
A620	42.01	17.91	24.51	7.19	41.80	45.20	20.20	3.25	39.10/8886	55.1	2.18

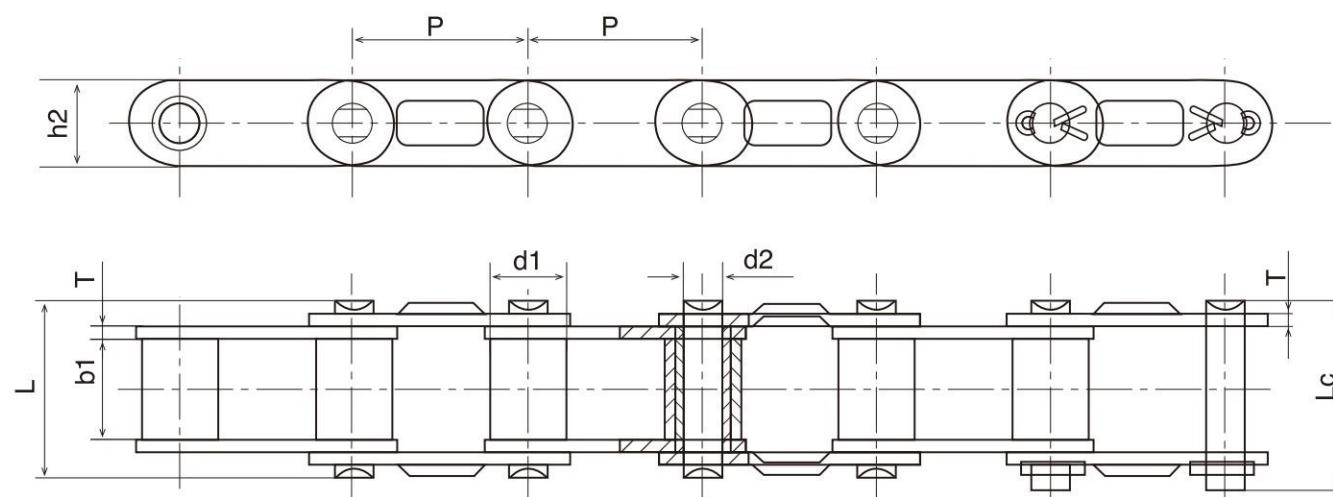


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	每米重量 Weight Per Meter
Chain No.	p	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	L <sub>c</sub> max	h <sub>2</sub> max	T max	Q min	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
CA627	30.00	15.88	19.05	8.28	36.1	39.4	20.5	3.00	50.0/11247	55.0	2.51
CA550D	41.40	16.87	19.81	7.19	35.0	38.0	19.3	2.80	39.10/8886	51.2	1.94
CA555D	41.40	16.87	12.70	7.19	29.1	32.0	19.3	3.10	39.10/8886	56.0	1.72
CA557D	41.40	17.78	20.24	8.00	37.4	40.6	23.1	3.10	55.61/12639	74.3	2.60
CA620D	42.01	17.91	24.51	7.19	41.8	45.2	20.2	3.25	39.10/8886	55.1	2.35

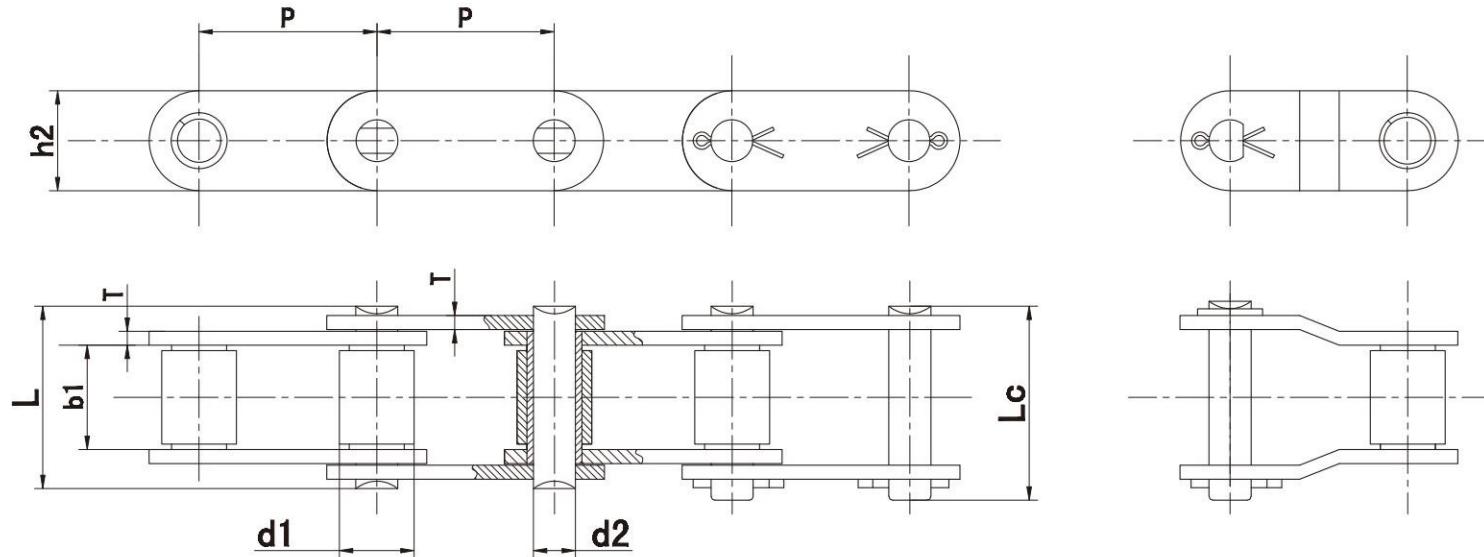


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	平均拉伸载荷 Average Tensile Strength	每米重量 Weight Per Meter
Chain No.	p	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	L <sub>c</sub> max	h <sub>2</sub> max	T max	Q min	Q <sub>0</sub>	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kN	kg/m
CA550	41.40	16.87	19.81	7.19	35.0	38.5	20.2	2.80	39.10/8886	51.2	1.94
CA550V	41.40	16.80	19.05	8.28	36.1	39.1	22.00	3.00	55.00/12499	68.7	2.24
CA555	41.40	16.87	12.70	7.19	29.1	32.0	19.30	3.10	39.10/8886	56.0	1.72
CA557	41.40	17.78	20.24	8.00	37.4	40.6	23.10	3.10	55.61/12639	74.3	2.60
CA620	42.01	17.91	24.51	7.19	41.8	45.2	20.20	3.25	39.10/8886	55.1	2.35
CA2060H	38.10	11.91	12.70	5.94	29.2	31.6	18.00	3.25	31.10/6996	40.5	1.45
CA2063H	38.10	11.89	12.70	5.94	29.4	34.2	19.30	3.25	31.28/7109	40.5	1.65
CA550F4	41.400	14.35	20.24	7.14	35.0	38.5	19.05	2.80	50.00/11363	52.0	1.76
CA550F5	41.400	16.66	20.24	7.14	35.0	38.5	19.05	2.80	45.00/10227	52.0	1.97
CAE44151	28.575	15.88	16.20	7.92	33.5	36.9	22.20	3.25	58.80/13363	64.5	2.73
38.4R	38.400	15.88	19.05	6.92	33.8	36.4	17.30	2.50	33.00/7480	41.2	1.70
38.4V	38.400	15.88	18.00	6.92	35.0	38.0	17.30	3.00	40.00/9091	50.0	1.83
38.4VB	38.400	15.88	19.05	8.28	36.1	39.4	20.50	3.00	50.00/11363	62.5	2.17
55VD	41.400	17.90	23.00	8.22	39.3	42.4	20.00	2.80	42.00/9546	45.0	2.34
S62F3	41.910	19.05	25.40	8.00	42.0	44.6	26.00	3.00	47.00/10796	58.7	3.12
CA960	41.400	17.78	22.61	8.90	40.1	43.0	23.10	3.00	66.00/15160	72.6	6.94
CA550VF2	41.400	16.80	19.05	8.28	36.1	38.8	20.00	3.00	55.00/12499	68.7	2.13
CA550H	41.400	16.74	20.00	7.14	36.0	39.1	19.10	3.00	57.82/19000	60.8	2.00

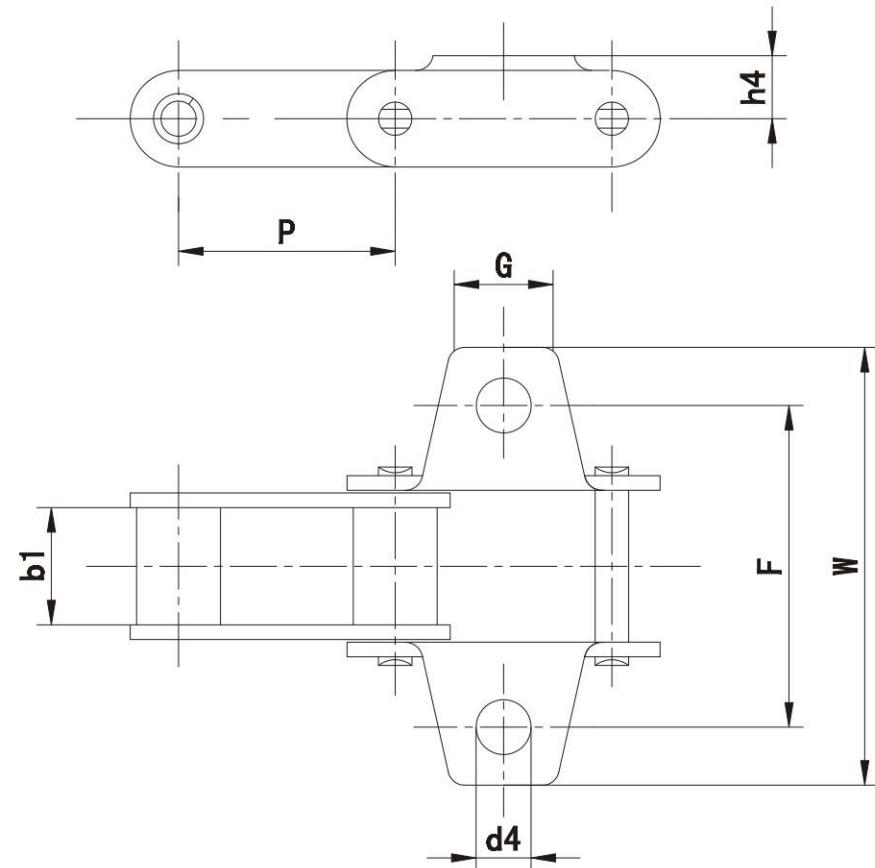


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
38.4VK1	38.4	18.00	22.00	57.5	82.00	15.4	9.00
38.4RK1F1	38.4	19.05	22.00	58.0	83.00	15.4	9.00
38.4VF3K1	38.4	18.00	20.00	58.0	79.00	15.4	9.00
38.4RK1F2	38.4	19.05	22.00	57.5	82.00	16.0	9.00
38.4RK1F3	38.4	19.05	20.00	58.0	84.40	15.5	8.50
38.4RK1F4	38.4	19.05	20.00	57.0	75.00	16.0	8.50
38.4RK1F7	38.4	19.05	22.00	57.5	82.00	16.0	10.50
38.4VK1F9	38.4	18.00	22.00	56.8	82.00	16.3	8.70
38.4VK1F6	38.4	18.00	22.00	56.8	74.80	16.3	8.50
38.4VK1F7	38.4	18.00	22.00	57.5	82.00	15.4	8.40
CA550F2	41.4	19.50	22.00	50.8	72.00	14.7	8.50
CA550K1F1	41.4	19.81	20.00	54.0	76.20	16.5	8.30
CA550K1F2	41.4	19.81	20.00	50.8	76.20	16.5	8.30
CA550K25	41.4	19.81	22.23	50.8	71.40	12.7	8.70
CA557K1	41.4	20.24	22.00	50.8	72.00	15.9	8.70
CA550VK1	41.4	19.05	27.00	54.0	75.54	16.5	8.50
CA550VK1F1	41.4	19.05	27.00	50.8	75.54	16.5	8.50
CA550F4K19	41.4	20.24	22.23	50.8	77.80	12.7	6.75
CA550K29F1	41.4	19.81	22.20	50.8	75.40	12.7	10.30
CA550AK29M	41.4	19.81	26.20	50.8	75.40	16.5	10.24
CA550K1F7	41.4	19.81	26.20	50.8	75.40	16.5	8.40
CA550A29	41.4	19.81	22.23	50.8	71.40	12.7	9.92
CA550VF2K1	41.4	19.05	27.18	51.0	75.54	16.5	8.33
CA550F5AK29M	41.4	20.24	26.20	50.8	75.40	16.5	10.24
CA550F5K29F1	41.4	20.24	22.00	50.8	75.40	12.7	10.30
CA550F5K1	41.4	20.24	22.20	54.0	71.50	12.7	8.50
CA557K1F2	41.4	20.24	22.00	50.8	72.00	15.9	8.30

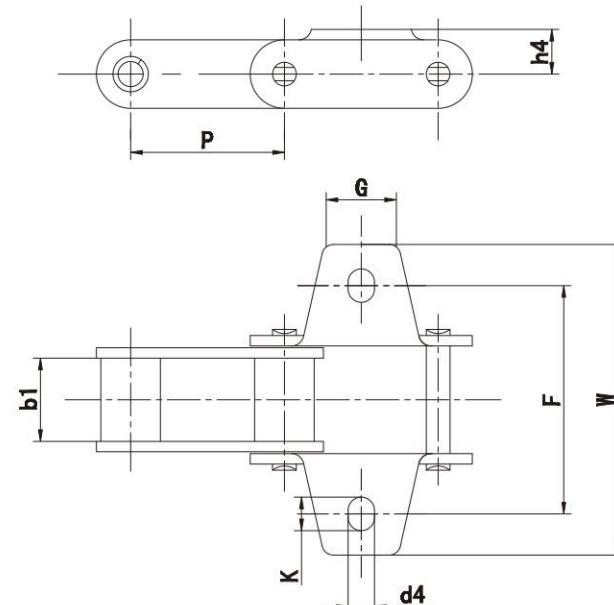


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
CA550K1	41.4	19.81	22.00	52.5	76.2	12.7	8.3	10.0
CA550K1F3	41.4	19.81	22.00	54.0	76.2	12.7	8.3	11.5
CA550F4K19F1	41.4	20.24	22.23	52.5	76.2	12.7	8.3	10.0
CA550K1F9	41.4	19.81	22.00	50.8	76.2	12.7	8.3	11.7
CA555K1	41.4	12.70	22.00	52.5	76.2	12.7	8.3	10.0

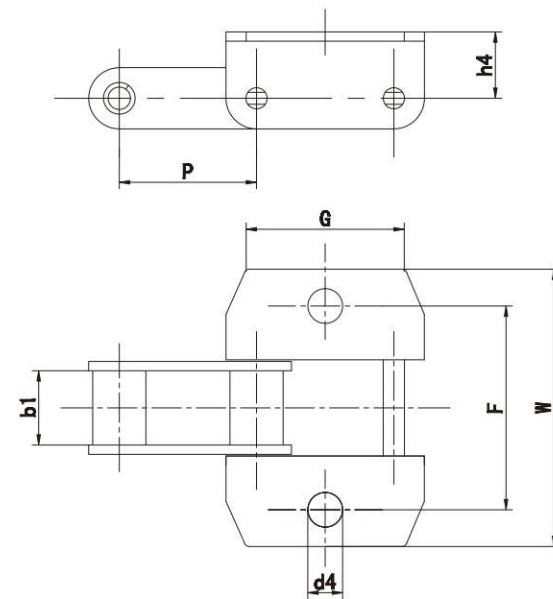


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
38.4RK1	38.4	19.05	29.1	58.0	76.5	15.1	10.5
38.4VK1F1	38.4	18.00	29.1	57.0	75.0	15.1	8.5
38.4VBK1	38.4	19.05	29.0	58.0	87.0	14.0	10.5
38.4VBF3	38.4	19.05	40.0	57.0	86.0	16.0	10.3
38.4VK1F2	38.4	18.00	29.1	57.0	75.0	15.1	10.5
38.4VK1F3	38.4	18.00	29.1	57.0	75.0	15.1	9.0
38.4RK1F6	38.4	19.05	40.0	57.0	84.0	16.5	10.3
38.4VK1F10	38.4	18.00	39.0	58.4	82.4	14.5	10.5
38.4VBK1F3	38.4	19.05	39.0	57.0	80.0	16.0	10.5
CA550HK1	41.4	20.00	22.6	54.0	71.5	12.7	8.5
CA550VK18	41.4	19.05	22.6	54.0	71.6	12.7	8.5
VA550K18	41.4	19.81	22.6	54.0	71.6	12.7	8.5

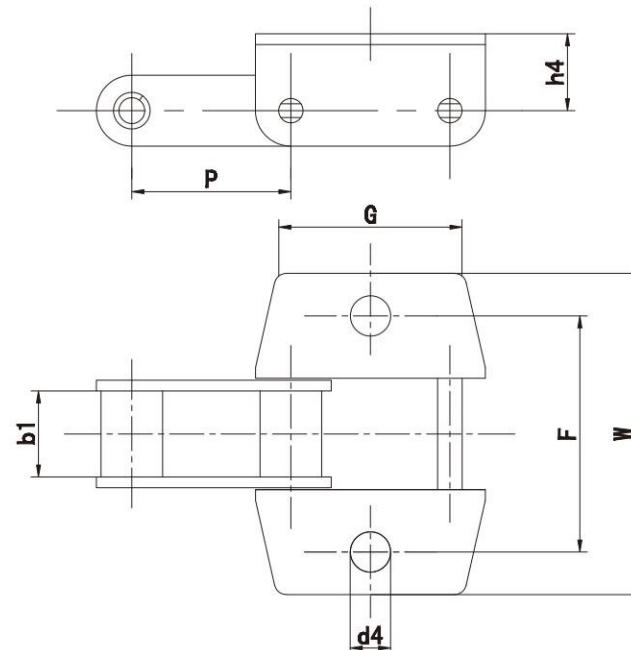


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
CA550K1F4	41.40	19.81	48.5	54.0	76.20	16.5	8.5
CA550VK1F3	41.40	19.05	56.0	54.0	75.54	16.5	8.5
CA550K1F6	41.40	19.81	48.5	54.0	76.20	16.5	10.5
CA550K18	41.40	19.81	22.6	54.0	71.60	12.7	8.5
CA620A1F1	42.01	24.51	63.5	67.7	91.70	16.1	10.5
38.4VK1F8	38.40	18.00	40.0	57.0	86.00	16.0	10.5
38.4VBF5	38.40	19.05	40.0	57.0	86.00	14.0	10.5
38.4VBF6	38.40	19.05	20.0	57.0	75.00	16.0	8.6
38.4VBF7	38.40	19.05	40.0	58.5	86.60	14.0	10.5

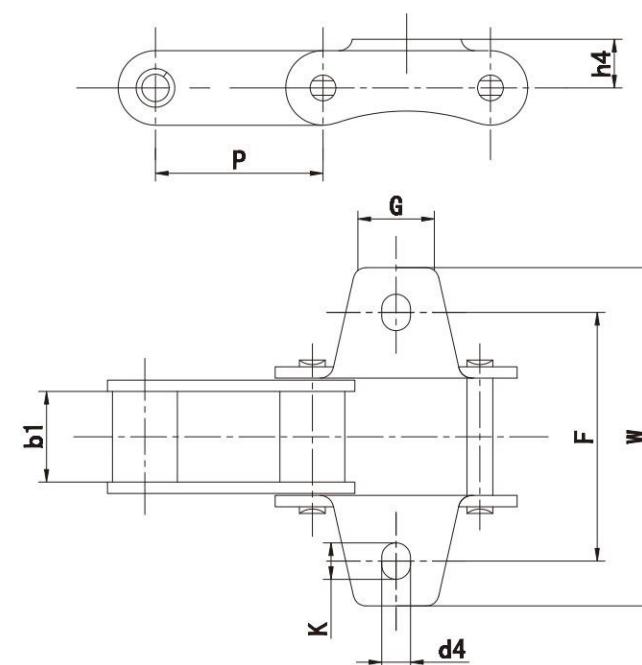


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
CA55K19	41.4	19.81	22.0	50.8	71.0	12.7	8.3	11.0

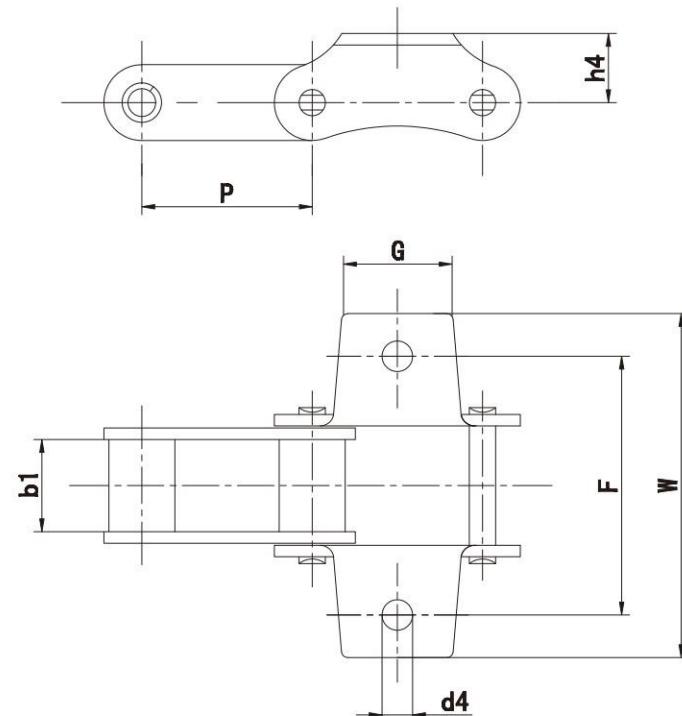


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
CA550F1	41.4	19.81	22.23	53.95	70.6	12.7	9.90
CA550K19F3	41.4	19.81	25.50	50.80	68.4	16.5	8.33
CA550VK19F1	41.4	19.05	25.50	50.80	67.8	16.5	8.33
CA557AK4	41.4	20.24	26.19	50.80	69.4	16.5	8.33

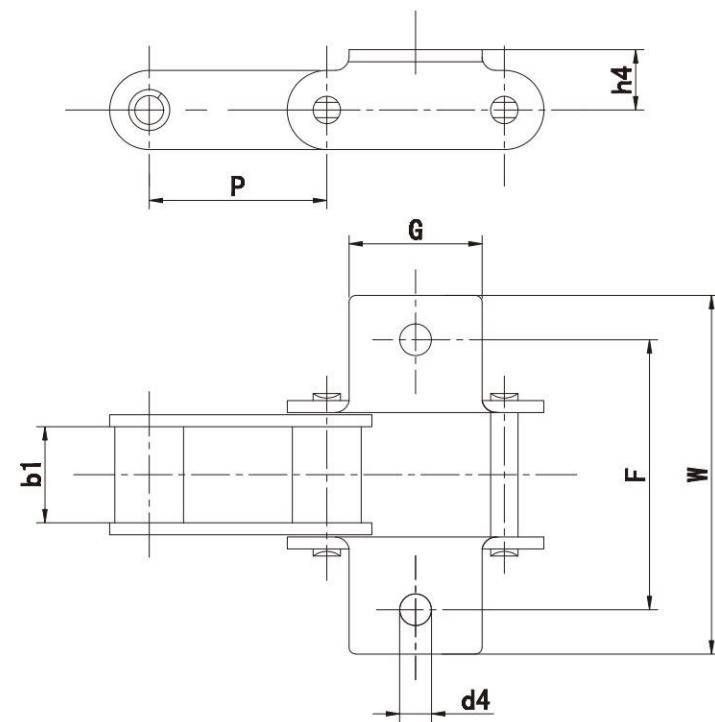



Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
55VDK1	41.40	23.00	30.0	50.8	76.0	16.0	9.0
CA550A1F5	41.40	19.81	38.1	74.6	105.6	12.7	10.3
CA557A1F1	41.40	20.24	38.1	74.6	105.6	12.7	10.3
S77F1K1	58.34	22.23	40.0	77.0	128.0	20.0	10.5
S77F2K1	58.34	22.23	40.0	77.0	132.0	25.0	10.5

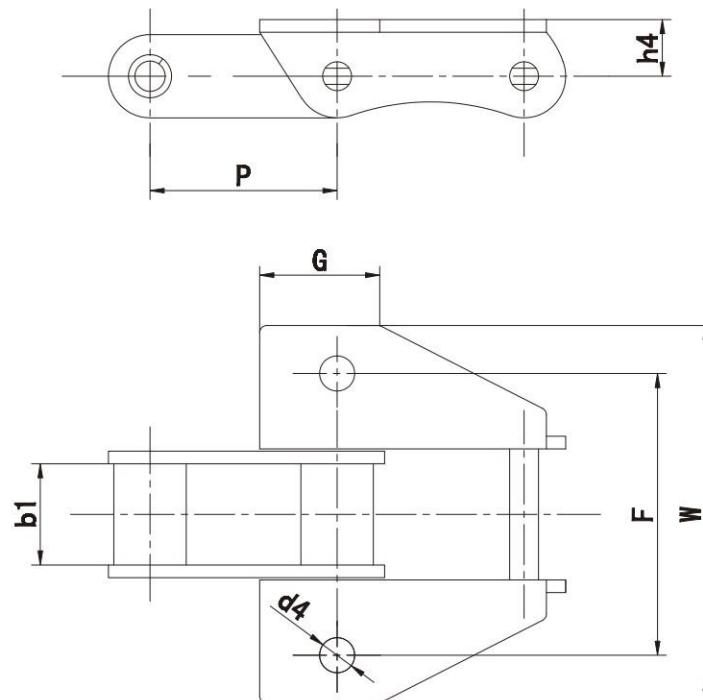


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
CA550K39M	41.4	19.81	29.5	50.80	71.4	12.7	9.8
CA550K39MF3	41.4	19.81	29.5	50.80	71.4	12.7	10.3
CA550HK39M	41.4	20.00	31.0	57.00	78.0	14.2	10.5
CA557K39M	41.4	20.24	31.0	50.80	71.4	12.7	10.3
CA557K39MF1	41.4	20.24	22.0	57.15	77.6	14.0	9.9
CA557K39MF3	41.4	20.24	31.0	57.00	78.0	14.5	10.3
CA550F5K39M	41.4	20.24	29.5	50.80	71.4	12.7	10.3
CA557K39	41.4	20.24	31.0	57.15	77.8	12.7	12.7

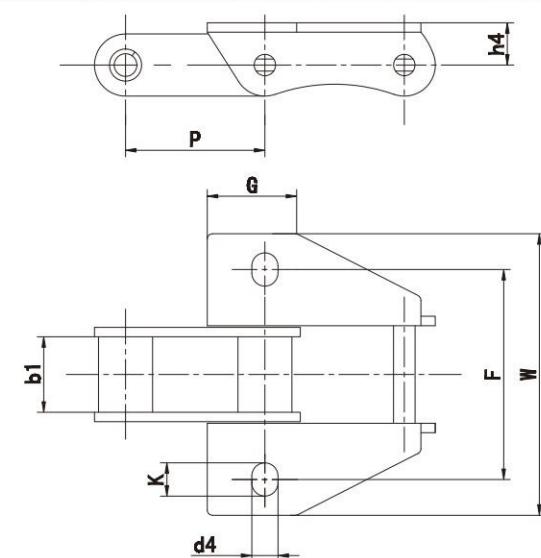


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
CA550K39MF2	41.4	19.81	29.5	50.80	71.4	12.7	9.9	13
CA557K39MF2	41.4	20.24	29.5	50.80	71.4	12.7	9.9	13
CA557K39MF6	41.4	20.24	29.5	53.98	74.5	12.7	9.9	13

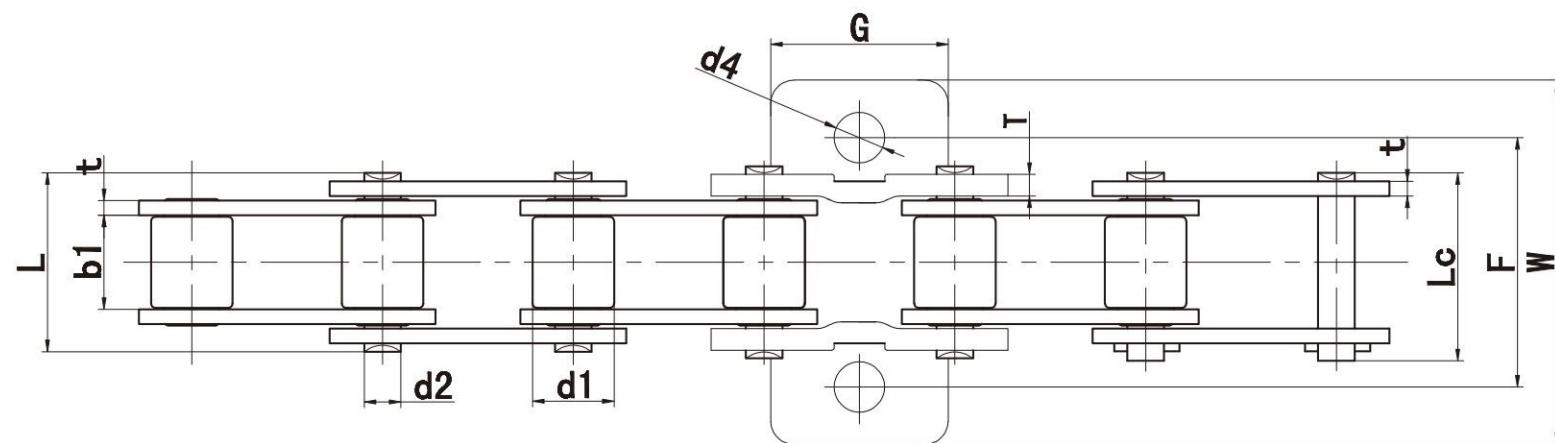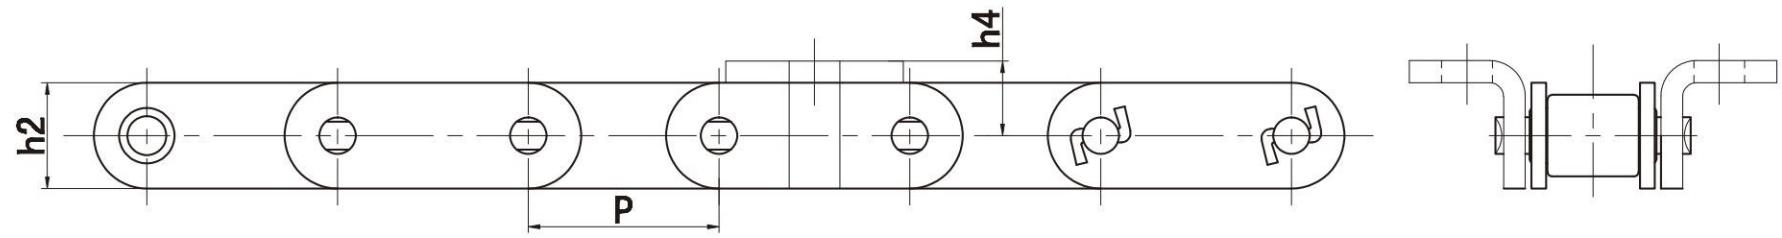


Chain No.	Pitch	Roller Diameter	Width between Inner Plates	Pin Diameter	Pin Length		Plate Dimension								Ultimate Tensile Strength
	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	t	G	W	F	h4	d4	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB
CA557K7	41.4	17.7	20.24	7.94	38.9	42.0	23.0	4.7	3.2	38.5	79.0	54.0	16.2	11.0	55.67/12523

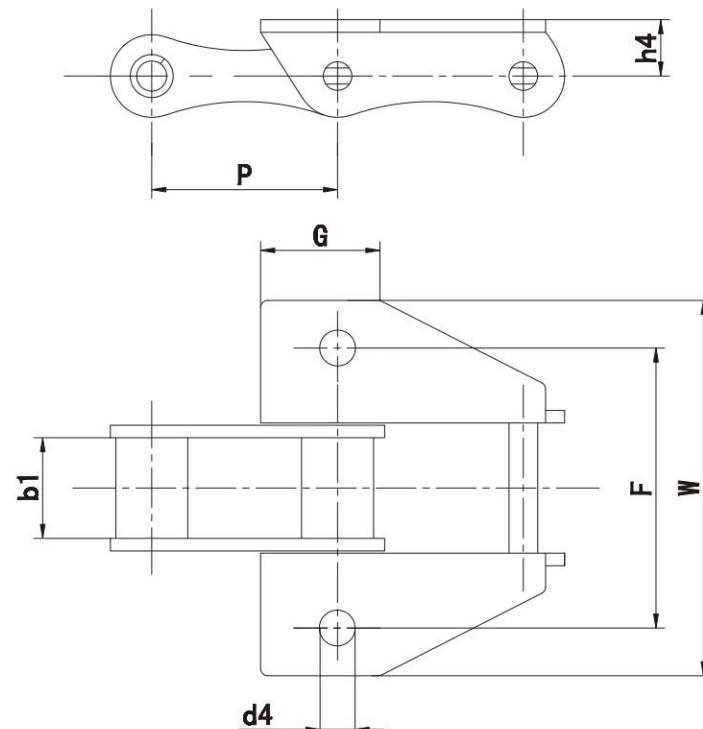


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
A557K39M	41.4	20.24	29.5	56.70	77.8	13.5	10.10
A557K39MF2	41.4	20.24	29.5	56.70	77.8	13.5	10.50
A557K39MF1	41.4	20.24	31.0	57.15	78.0	14.2	10.50
A557K35M	41.4	20.24	30.0	50.80	73.5	14.1	10.31
A557K39MF4	41.4	20.24	29.5	56.70	77.8	13.5	10.30
A557K39MF7	41.4	20.24	29.5	63.00	88.0	13.5	11.00
A557F1K39M	41.4	20.24	31.0	57.00	78.0	14.2	10.50

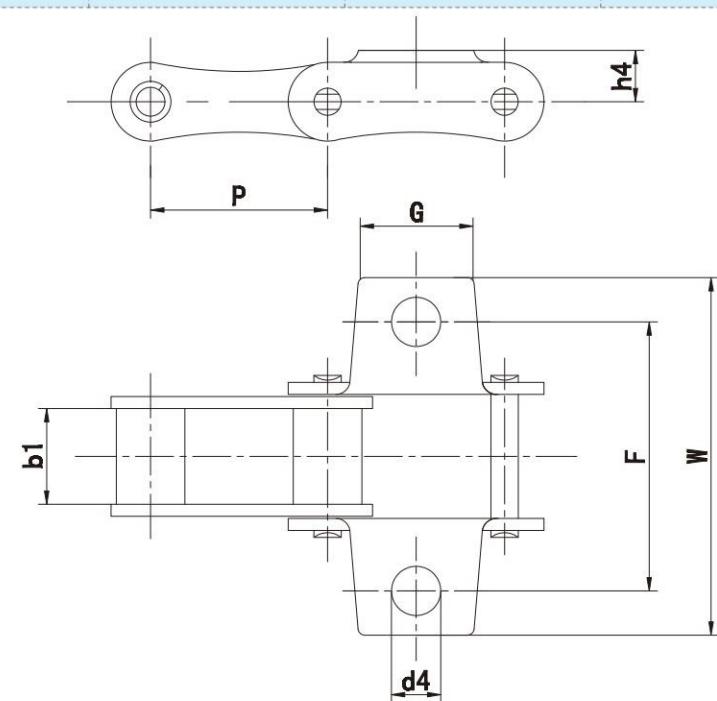


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
A557K27S	41.4	20.24	28.6	57.15	79.35	14.3	13.1

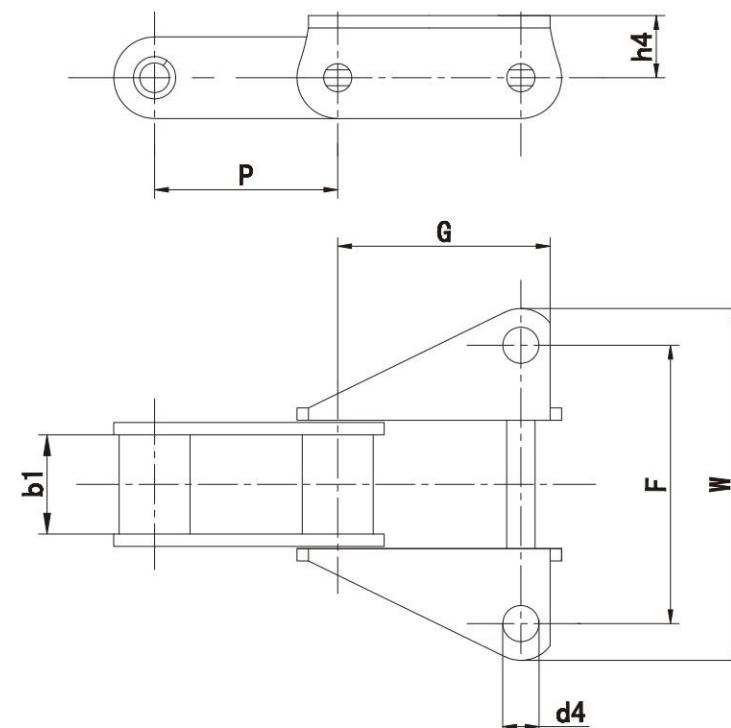


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm
CA557F1	41.4	20.24	60.0	53.94	76.2	14.6	9.9

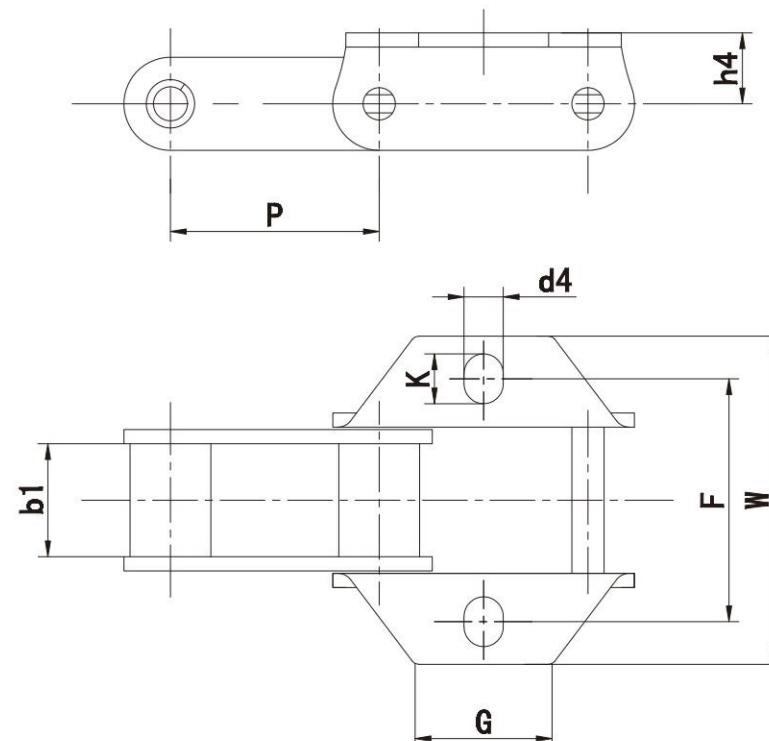


Chain No.	P mm	b1 mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
CA557F2	41.4	20.24	22.23	53.98	79.3	14.3	14.3	13.6

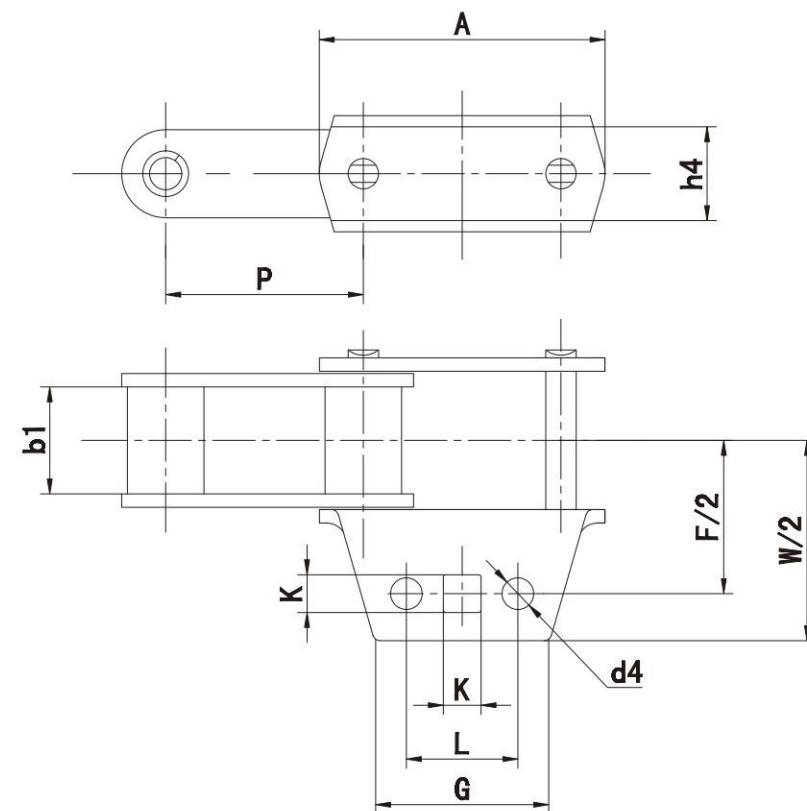


Chain No.	P mm	b1 mm	A mm	L mm	G mm	F mm	W mm	h4 mm	d4 mm	K mm
CA557F3	41.4	20.24	66.55	30.22	44.45	64.14	86.6	23.9	8.25	9.7

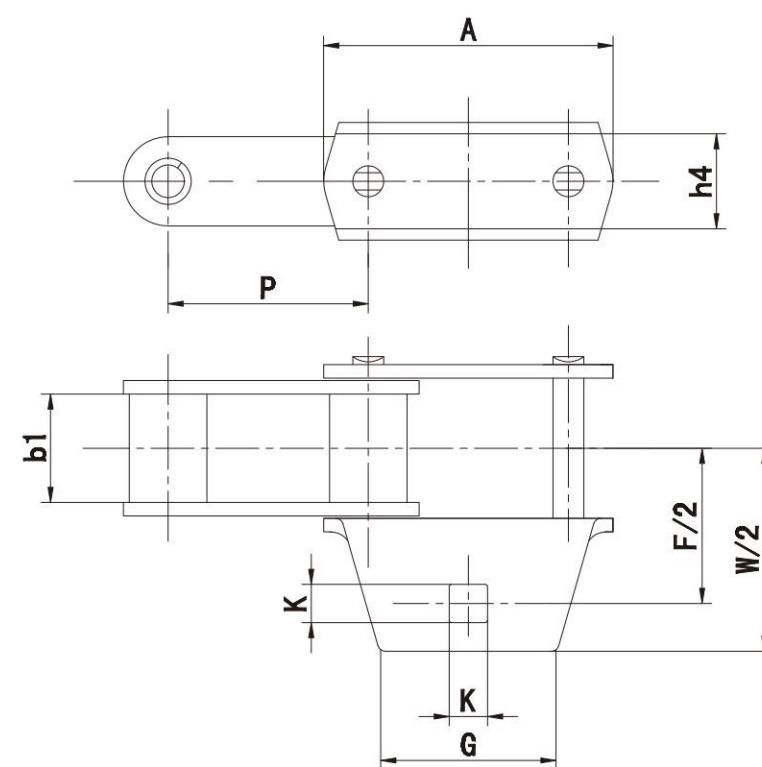


Chain No.	P mm	b1 mm	A mm	G mm	F mm	W mm	h4 mm	K mm
CA557F4	41.4	20.24	66.65	44.45	64.14	86.6	23.9	9.7

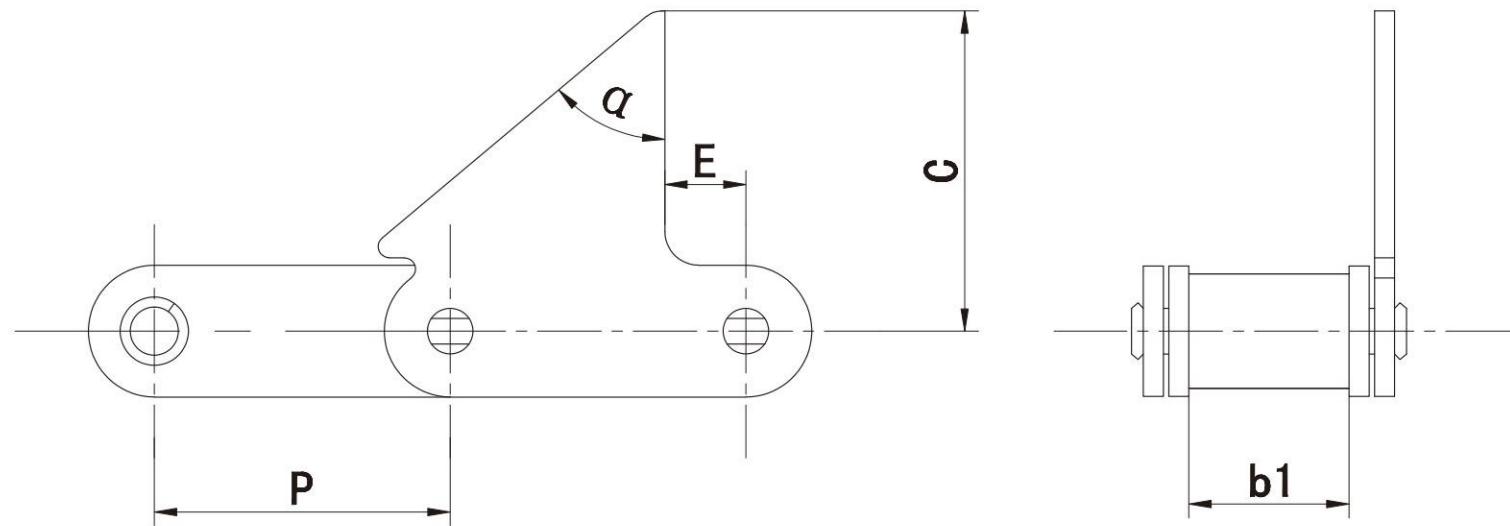


Chain No.	P mm	b1 mm	C mm	$\alpha$ mm	E mm
CA550F6	41.4	19.81	50.0	40°	10
CA550F9	41.4	19.81	40.7	40°	10

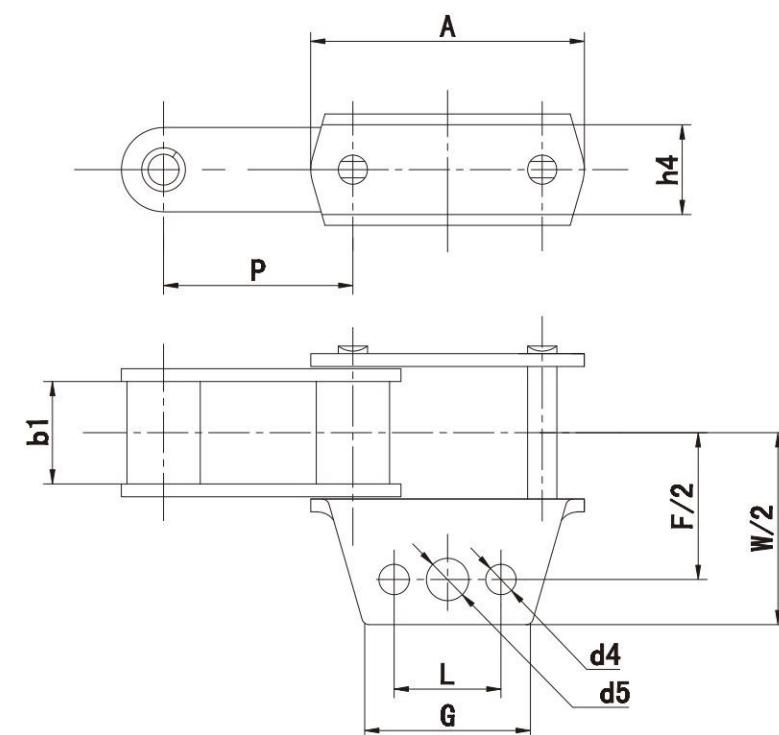


Chain No.	P mm	b1 mm	A mm	L mm	G mm	F mm	W mm	$h_4$ mm	$d_4$ mm	$d_5$ mm
CA550F7	41.4	19.81	63.5	30.22	44.45	64.1	81.4	23.88	8.25	9.9

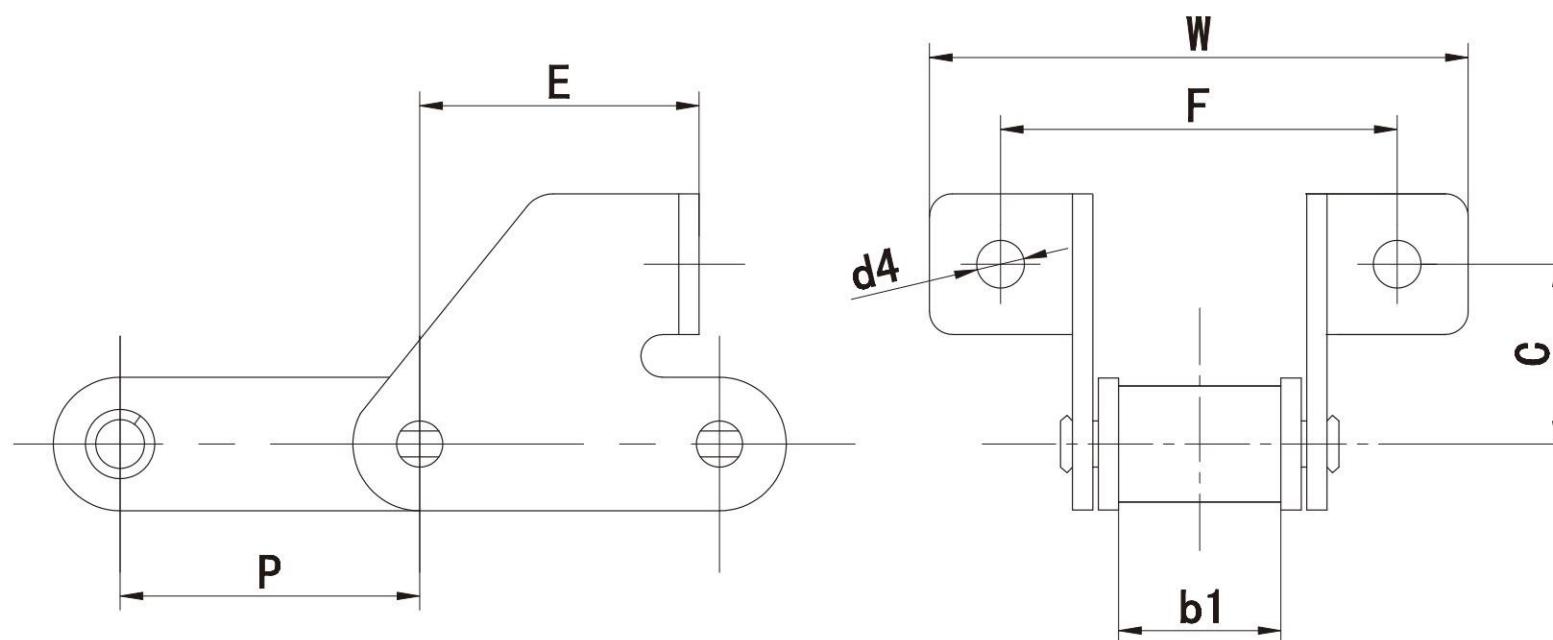


Chain No.	P mm	b1 mm	E mm	F mm	W mm	C mm	d4 mm
38.4RSD	38.4	19.05	38.4	52.0	71.0	24.5	8.4
38.4RSDF1	38.4	19.05	38.4	52.0	70.0	24.5	8.4
38.4RSDF2	38.4	19.05	38.4	52.0	71.0	24.5	9.0
38.4VSD	38.4	18.00	38.4	52.0	71.0	24.5	8.4
38.4VBSD	38.4	19.05	38.4	52.0	71.0	25.0	8.4
38.4VBSDF1	38.4	19.05	38.4	52.0	73.0	24.0	8.3
38.4VBSDF2	38.4	19.05	38.4	52.0	73.0	24.0	8.4
38.4VBSDF3	38.4	15.88	38.4	52.0	70.1	24.5	8.5
38.4RSDF4	38.4	19.05	37.4	52.0	71.0	24.0	8.4
38.4RSDF5	38.4	19.05	35.9	60.0	79.0	24.0	6.4
38.4RSDF6	38.4	19.05	38.4	62.0	81.0	24.5	8.5
38.4RSDF7	38.4	19.05	38.4	60.0	81.0	24.5	8.4
38.4RSDF8	38.4	19.05	38.4	60.0	81.0	24.5	6.4
38.4VBSDF5	38.4	19.05	37.4	52.0	73.0	24.0	8.7
CA550SD	41.1	19.81	36.9	47.6	68.2	31.0	8.7
CA550SDF4	41.4	19.81	36.9	47.6	89.0	31.0	8.7
CA550SDF10	41.4	19.81	37.7	47.6	68.2	31.0	8.5
CA550F5SDF1	41.4	20.24	36.9	47.6	68.2	31.0	8.7

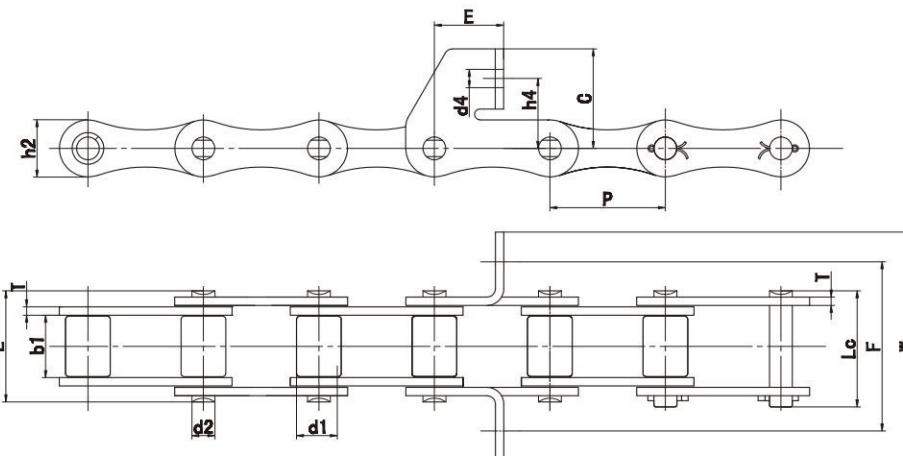


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension							极限拉伸载荷 Ultimate Tensile Strength	
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	t	G	W	F	h4	d4	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB
S413F1	41.3	16.0	22.23	8.28	39.7	42.5	20.5	3.0	35.6	60.7	82	24.7	25	6.3	50/11248

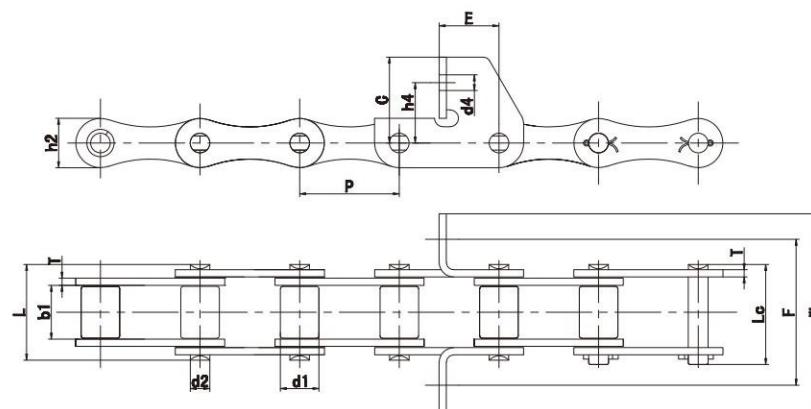


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension							极限拉伸载荷 Ultimate Tensile Strength	
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	t	G	W	F	h4	d4	Q min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB
S413F2	41.3	16.0	22.23	8.28	39.7	42.5	20.5	3.0	33	60	84	29	24.2	6.5	50/11248

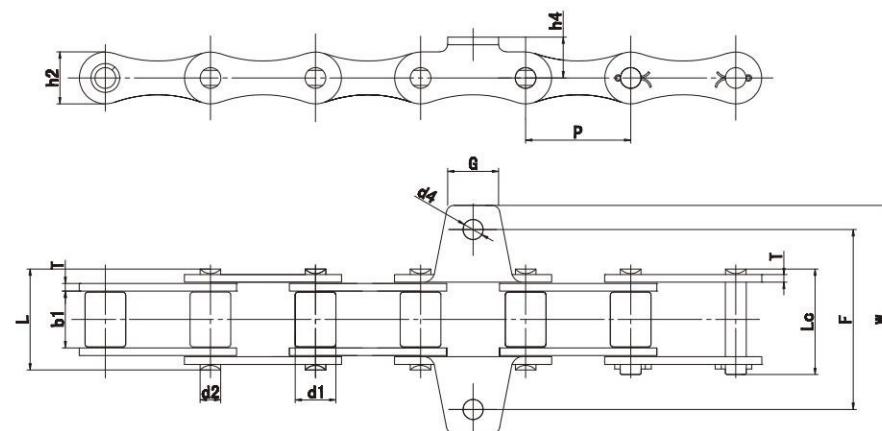


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension							极限拉伸载荷 Ultimate Tensile Strength	
Chain No.	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	F	W	h4	d4	G	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB
S413K1	41.3	16.0	22.23	8.28	39.7	42.5	20.5	3.0	70.5	89.5	16.0	8.1	20	50/11248	
S413K1S	41.3	16.0	22.23	8.28	39.7	42.5	20.5	3.0	70.5	89.5	16.0	8.4	20	50/11248	
S413K1T	41.3	16.0	22.23	8.28	39.7	42.5	20.5	3.0	70.5	89.5	16.0	10.4	20	50/11248	

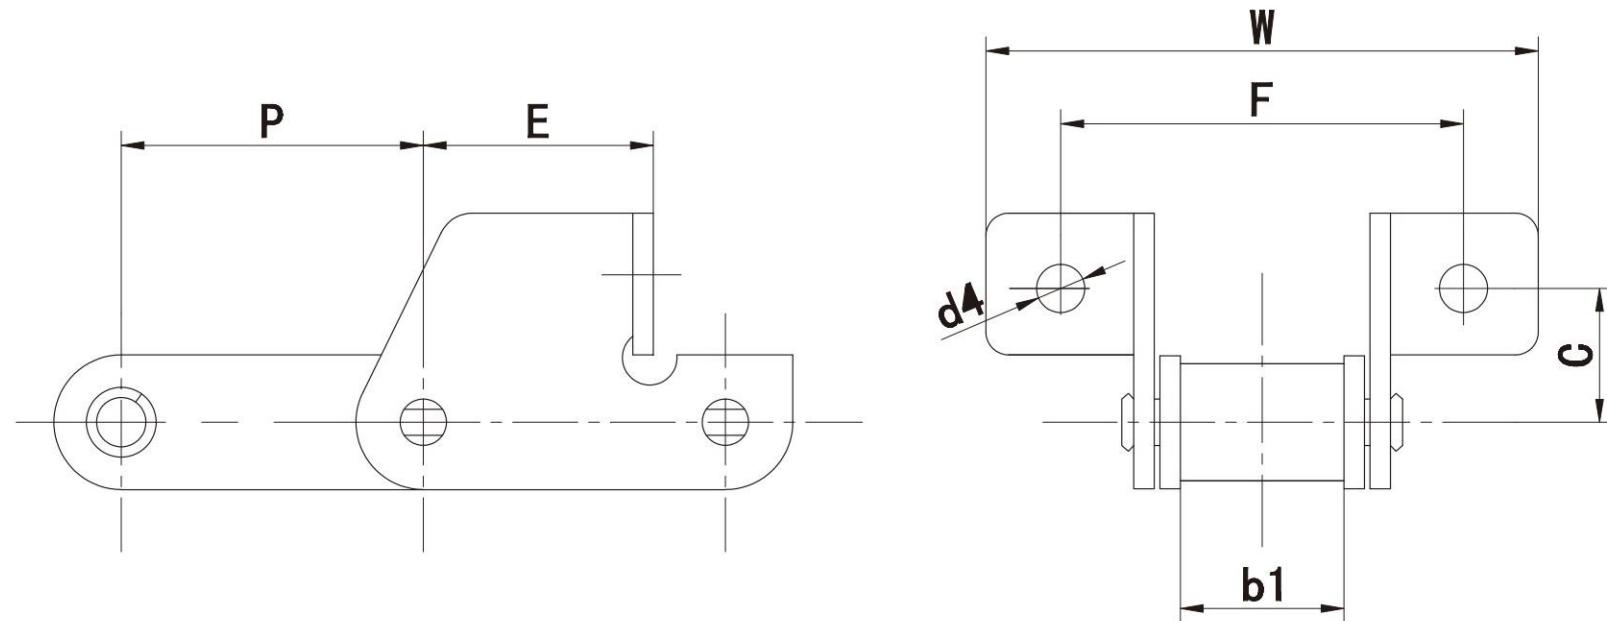


Chain No.	P	b1	E	F	W	C	d4
	mm	mm	mm	mm	mm	mm	mm
CA550SDF1	41.4	19.81	35.0	58.0	85.0	20.5	8.5
CA550SDF2	41.4	19.81	32.5	62.0	84.0	20.0	8.6
CA550SDF3	41.4	19.81	35.0	58.0	85.0	20.5	6.5
CA550SDF6	41.4	19.81	33.0	58.0	85.0	20.5	6.5
CA550SDF7	41.4	19.81	32.5	62.0	89.0	20.0	8.6
CA550F5SD	41.4	20.24	33.0	57.8	83.5	20.0	6.7
CA550F8SD	41.4	19.81	33.0	58.0	85.9	20.5	6.5
CA550SDF5	41.4	19.81	34.0	63.0	89.0	20.0	8.0
CA550SDF11	41.4	19.81	31.0	58.0	85.0	20.5	8.5
CA550SDF12	41.4	19.81	31.0	58.0	85.0	20.5	6.5
CA550HSD	41.4	20.00	33.4	58.0	90.0	20.0	6.5
CA550VSD	41.4	19.05	35.0	58.0	88.6	20.5	6.5

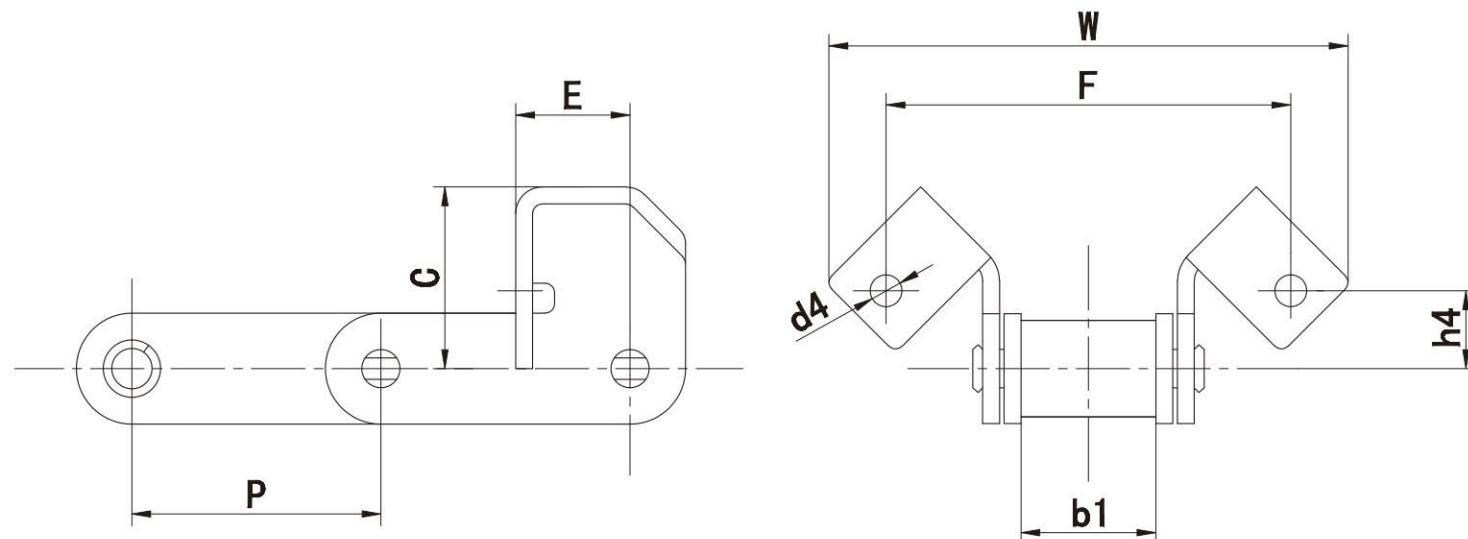


Chain No.	P mm	b1 mm	E mm	C mm	F mm	W mm	h4 mm	d4 mm
CA550F14	41.4	19.80	20.24	31.75	79.40	101.60	15.90	8.33
CA550F16	41.4	20.00	22.30	39.00	78.00	109.20	17.70	8.00
CA550VF14	41.4	19.05	20.24	31.75	79.40	101.60	15.90	8.33
CA550F5-F14	41.4	20.24	20.24	31.75	79.40	101.60	15.90	8.33
CA550F5-F14SF	41.4	20.24	21.34	31.75	79.40	101.60	15.90	9.91
CA557F14	41.4	20.24	19.60	34.00	79.40	109.80	15.88	8.60
CA557SFD	41.4	20.24	24.30	51.10	79.40	109.80	28.60	8.30
CA557SFDF1	41.4	20.24	24.30	51.10	79.40	109.80	28.60	9.53

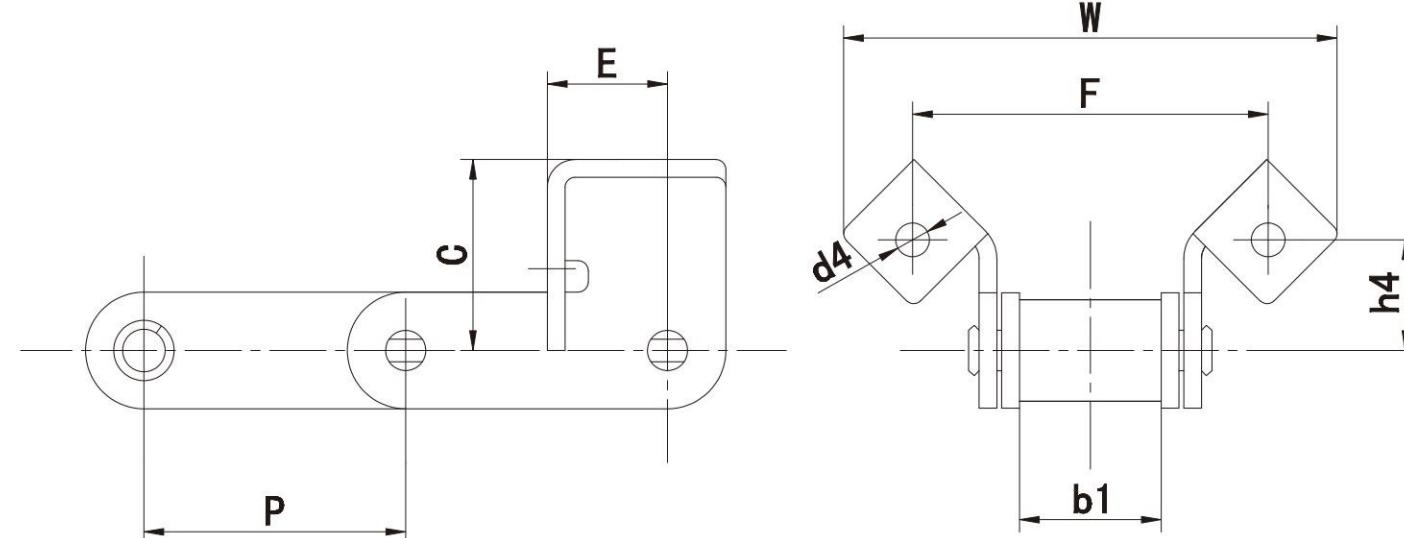


Chain No.	P mm	b1 mm	E mm	C mm	F mm	W mm	h4 mm	d4 mm
CA550F15	41.4	19.81	24.00	35.26	61.89	95.25	19.05	6.73
CA550F17	41.4	19.81	23.68	40.89	114.30	143.70	20.57	9.91
CA550VF13	41.4	19.05	25.40	59.60	79.35	135.45	28.60	8.74
CA550F18	41.4	19.81	24.00	35.26	61.98	95.25	19.05	8.33
CA550F19	41.4	19.81	21.00	32.00	79.20	104.5	16.20	10.30
CA550F5-F17	41.4	20.24	23.68	40.89	114.30	143.70	20.57	9.91
CA550F5-G18	41.4	20.24	24.13	20.32	63.50	84.00	8.38	8.38
CA550R-F2.4	41.4	19.81	24.50	59.50	79.40	135.50	28.50	8.74
CA550R-F3.4	41.4	19.81	20.20	50.00	79.40	122	28.50	8.74

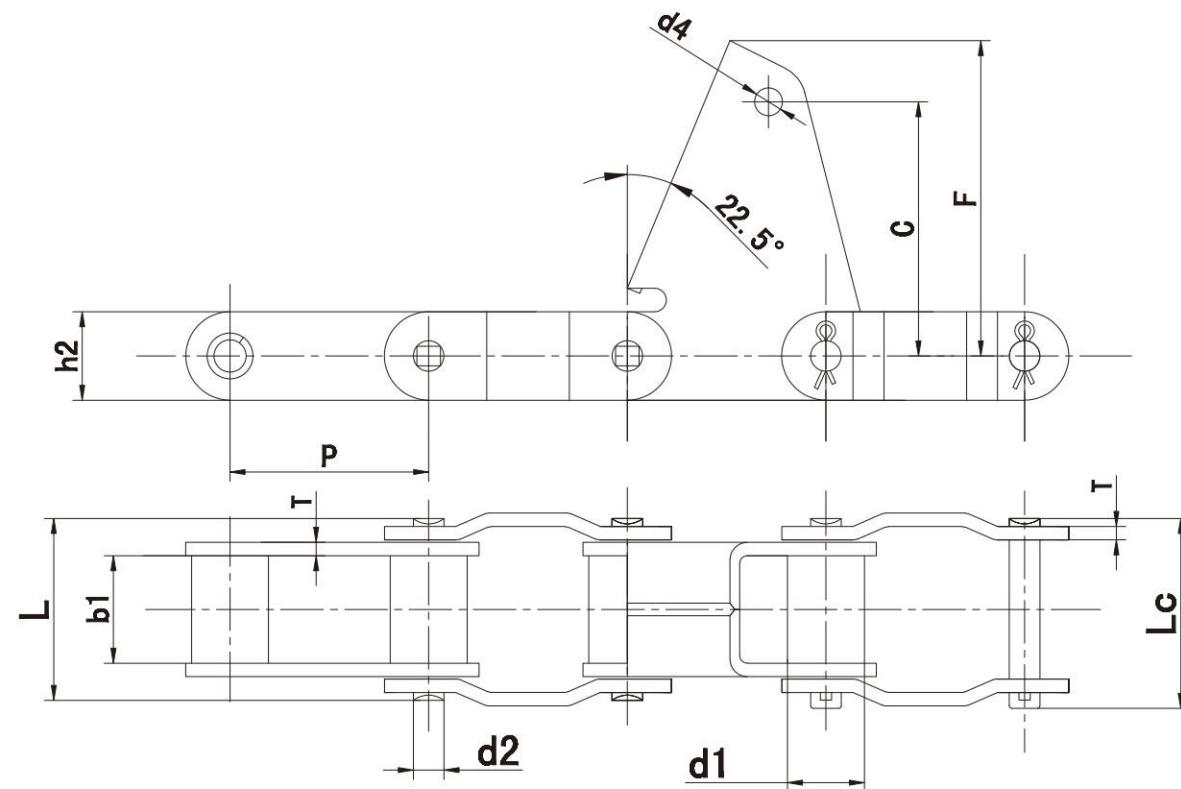

	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	链板尺寸 Plate dimension					极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter	
Chain No.	p	d <sub>1</sub> max	b <sub>1</sub> min	d <sub>2</sub> max	L max	L <sub>c</sub> max	h <sub>2</sub>	t/T	C	F	d <sub>4</sub>	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		kN/LB	kg/m
38.4VBF2	38.4	15.88	19.05	8.28	36.1	39.1	20.5	3.0	51.6	65	8.1	50/11247	2.33

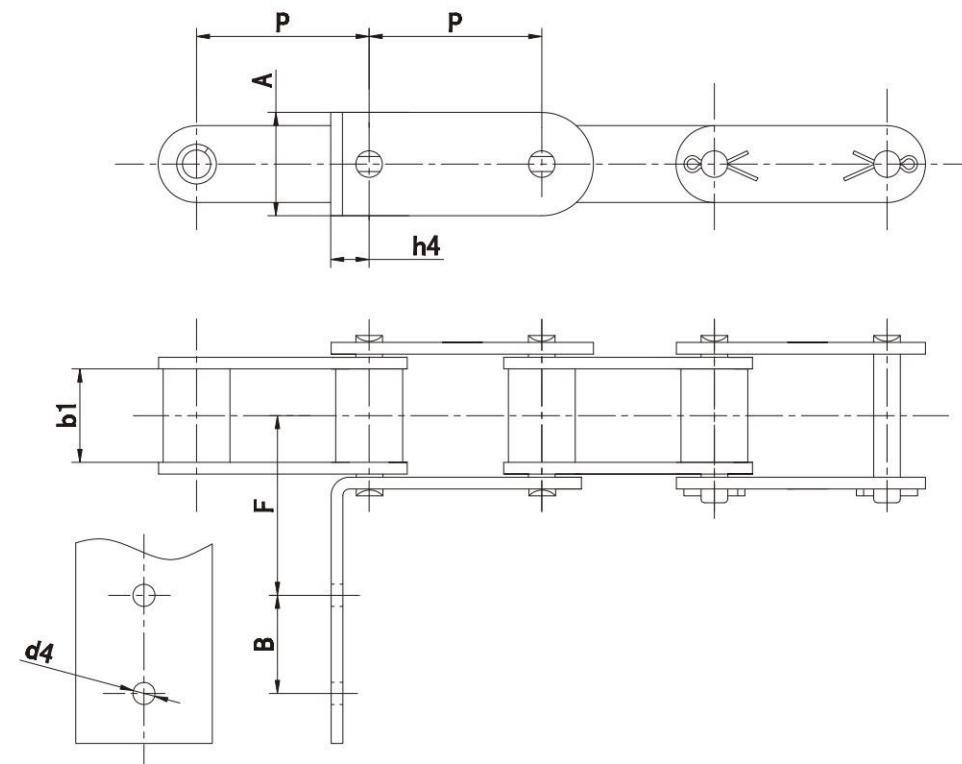


	P	b1	A	B	F	h4	d4
Chain No.	mm	mm	mm	mm	mm	mm	mm
38.4RF2	38.4	19.05	27.0	25	31.3	12.7	6.8

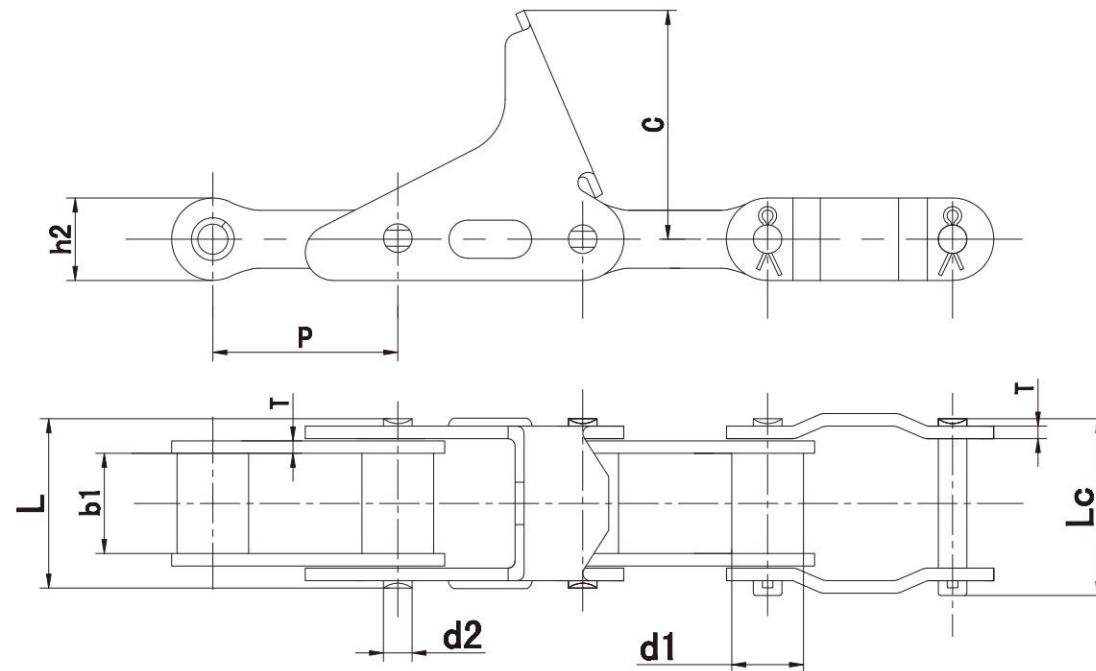


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	链板尺寸 Plate dimension			极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter	
Chain No.	$p$	$d_1$ max	$b_1$ min	$d_2$ max	$L$ max	$L_c$ max	$h_2$	$T$	$C$	$Q$ min	$q$
	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	kg/m
CA555F1	41.4	17.85	23.0	8.2	39.5	42.4	20.0	3.0	84.0	39.1/8795	2.99
CA555F2	41.4	17.85	23.0	8.2	39.5	42.4	20.0	3.0	62.5	39.1/8795	2.82


	P	C	F	W	$d_4$
Chain No.	mm	mm	mm	mm	mm
CA550VF1	41.4	23.4	58	90.0	6.5
CA550F10	41.4	23.4	58	90.0	6.5
CA550HF4	41.4	23.4	58	90.0	6.5

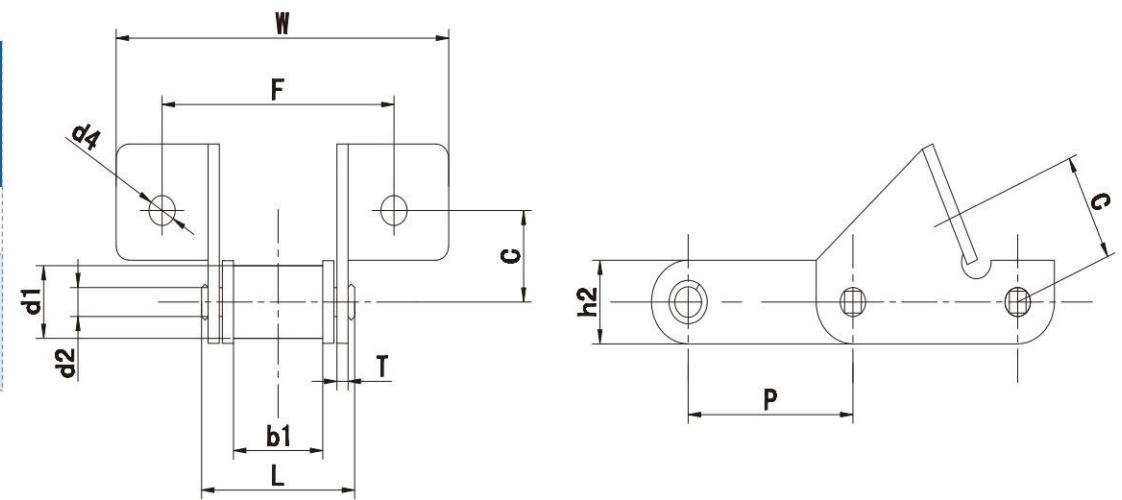


	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	内链板高度 Inner Plate Depth	链板厚度 Plate Thickness	极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter
Chain No.	$p$	$d_1$ max	$b_1$ min	$d_2$ max	$L$ max	$h_2$ max	$T$ max	$Q$ min	$q$
	mm	mm	mm	mm	mm	mm	mm	kN/LB	kg/m
CA550VF1	41.4	16.80	19.50	8.28	36.7	19.80	3.0	44/9898	2.50
CA550F10	41.4	16.70	19.81	7.16	36.2	19.05	3.0	53/11922	2.38
CA550HF4	41.4	16.74	20.00	7.16	36.5	20.20	3.1	55/12373	2.73

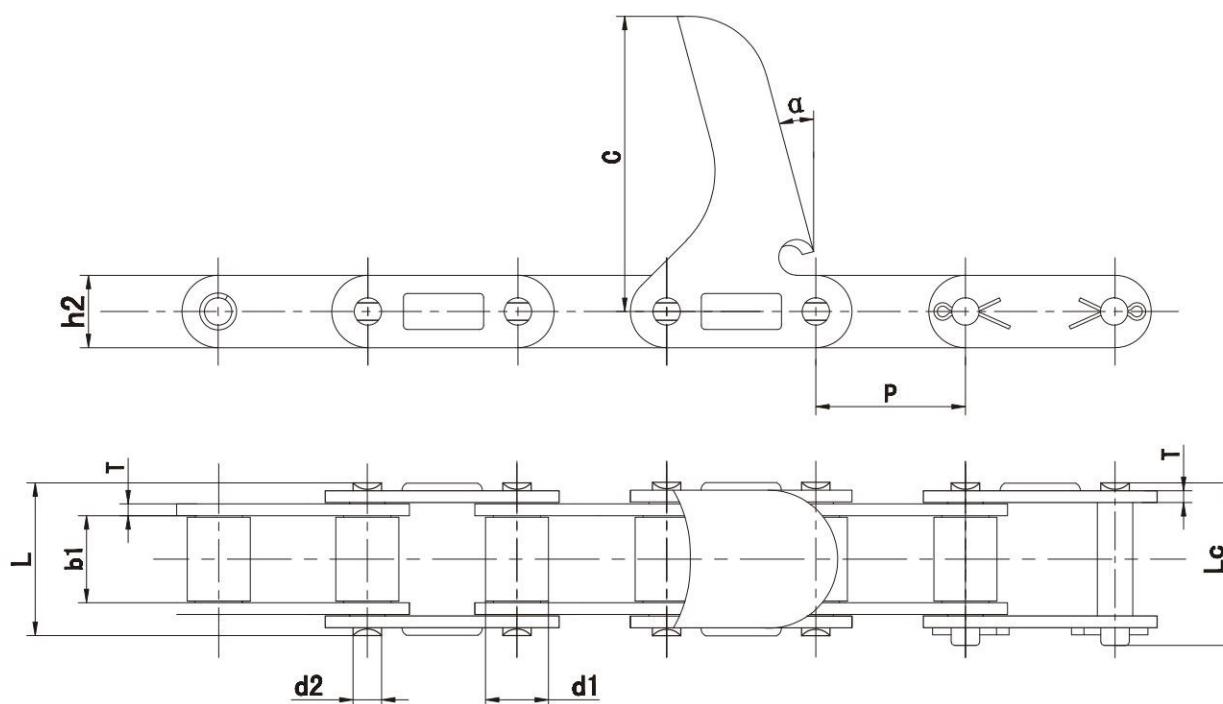


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate dimension				极限拉伸载荷 Ultimate Tensile Strength	每米重量 Weight Per Meter
	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	C	α	Q min	kg/m
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kN/LB	
CA2060-C6E	38.1	11.91	12.57	5.94	25.9	28.3	18.0	2.42	63.5	20°	31.1/6996	1.40
CA2060H-C6E	38.1	11.91	12.57	5.94	31.0	31.6	18.0	3.25	63.5	20.5°	31.1/6996	1.78

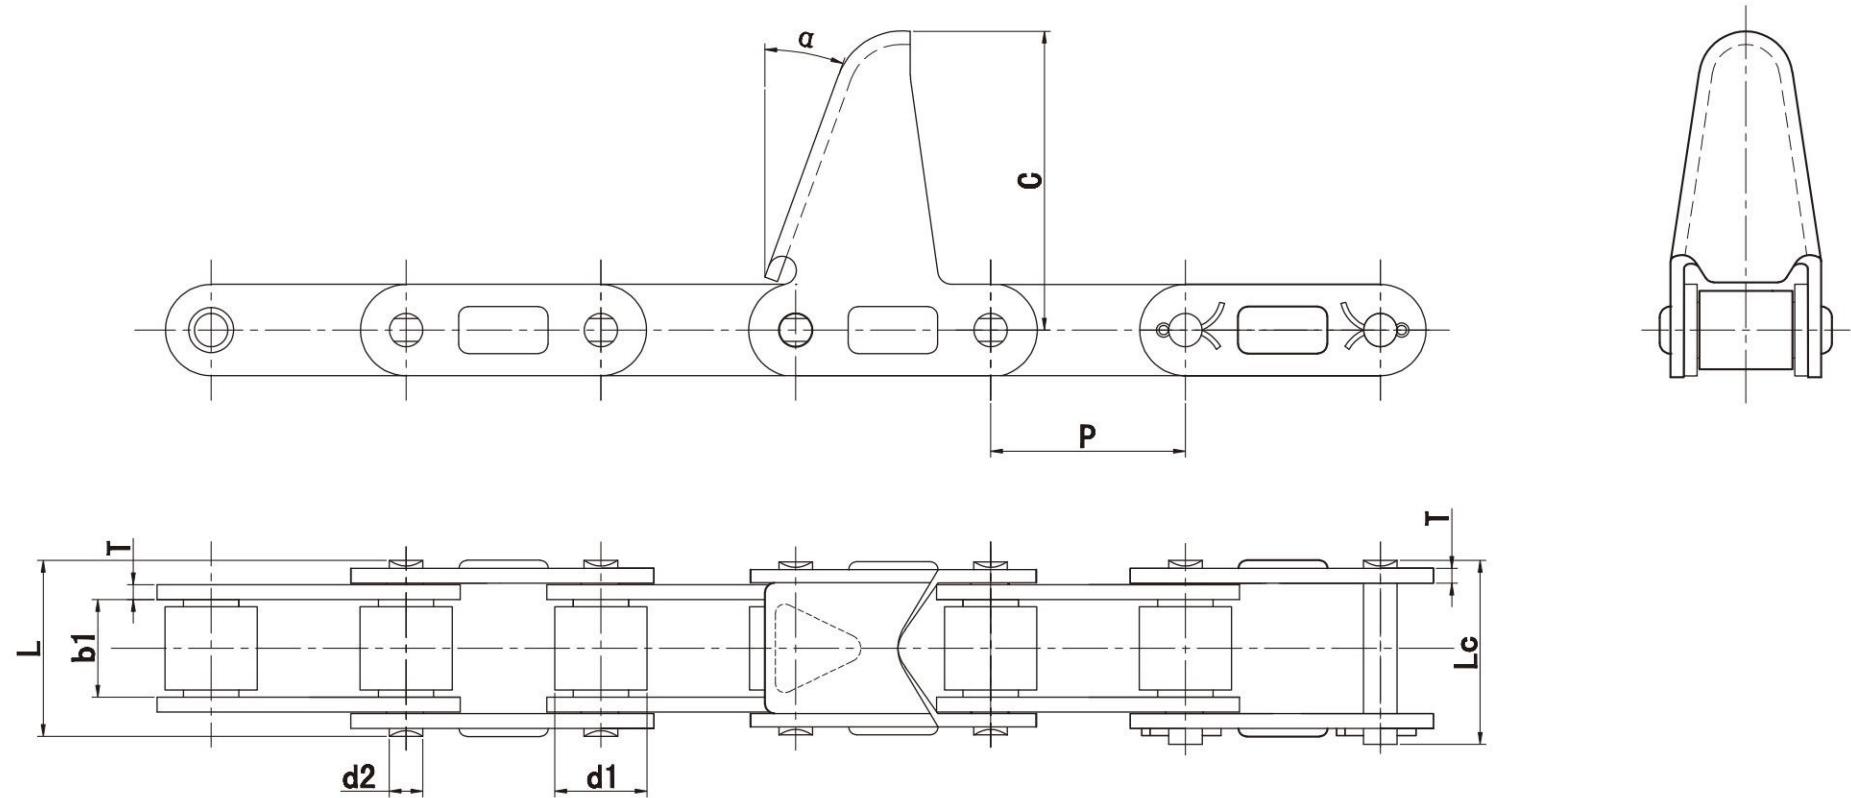


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension				极限拉伸载荷 Ultimate Tensile Strength	
	p	d1 max	b1 min	d2 max	L max	Lc max	h2	T	C	α	Q min	
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	KN/LB
CA550C11E	41.4	16.7	19.8	7.16	35.0	38.5	20.2	2.8	63.5	20	39.1/8866	
CA550C13E	41.4	16.7	19.8	7.16	35.0	38.5	20.2	2.8	92	15	39.1/8866	

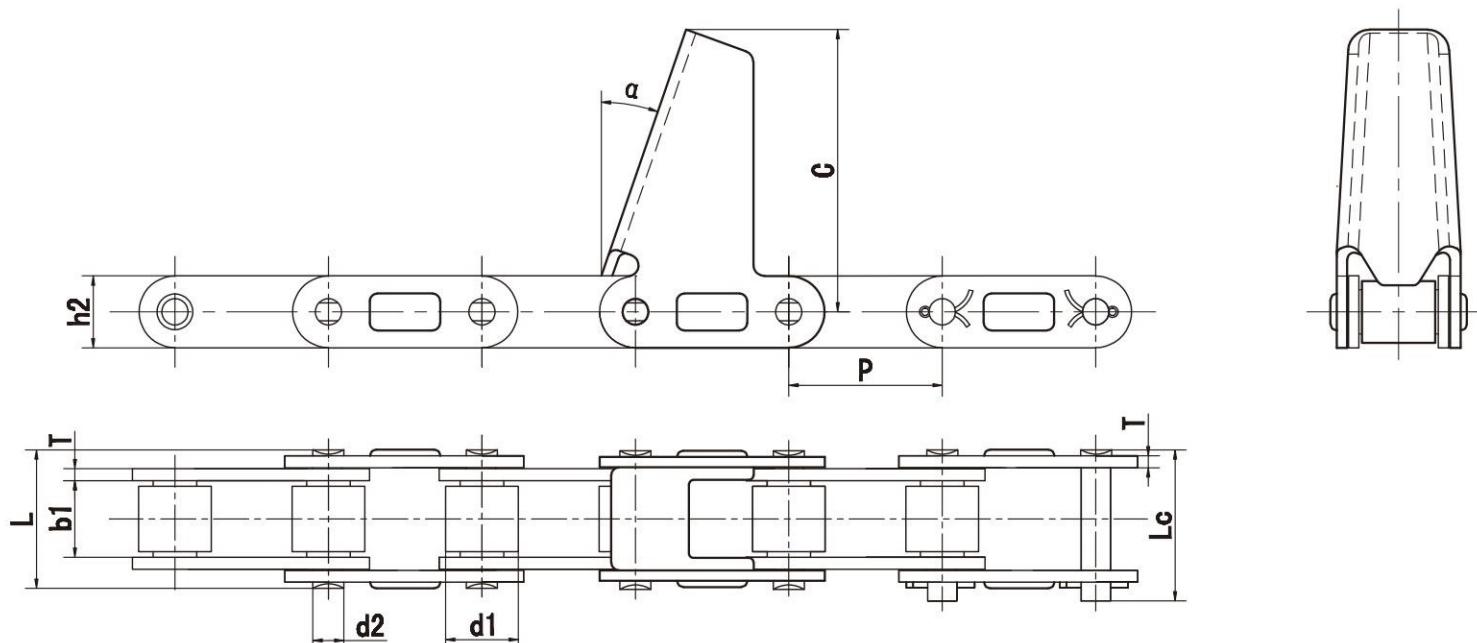


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension					极限拉伸载荷 Ultimate Tensile Strength	
	$p$	$d_1$ max	$b_1$ min	$d_2$ max	$L$ max	$L_c$ max	$h_2$	$T$	$C$	$\alpha$	$Q$ min		
	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	KN/LB		
CA550C17E	41.4	16.7	19.8	7.16	35.0	38.5	20.2	2.8	76.2	19	39.1/8866		

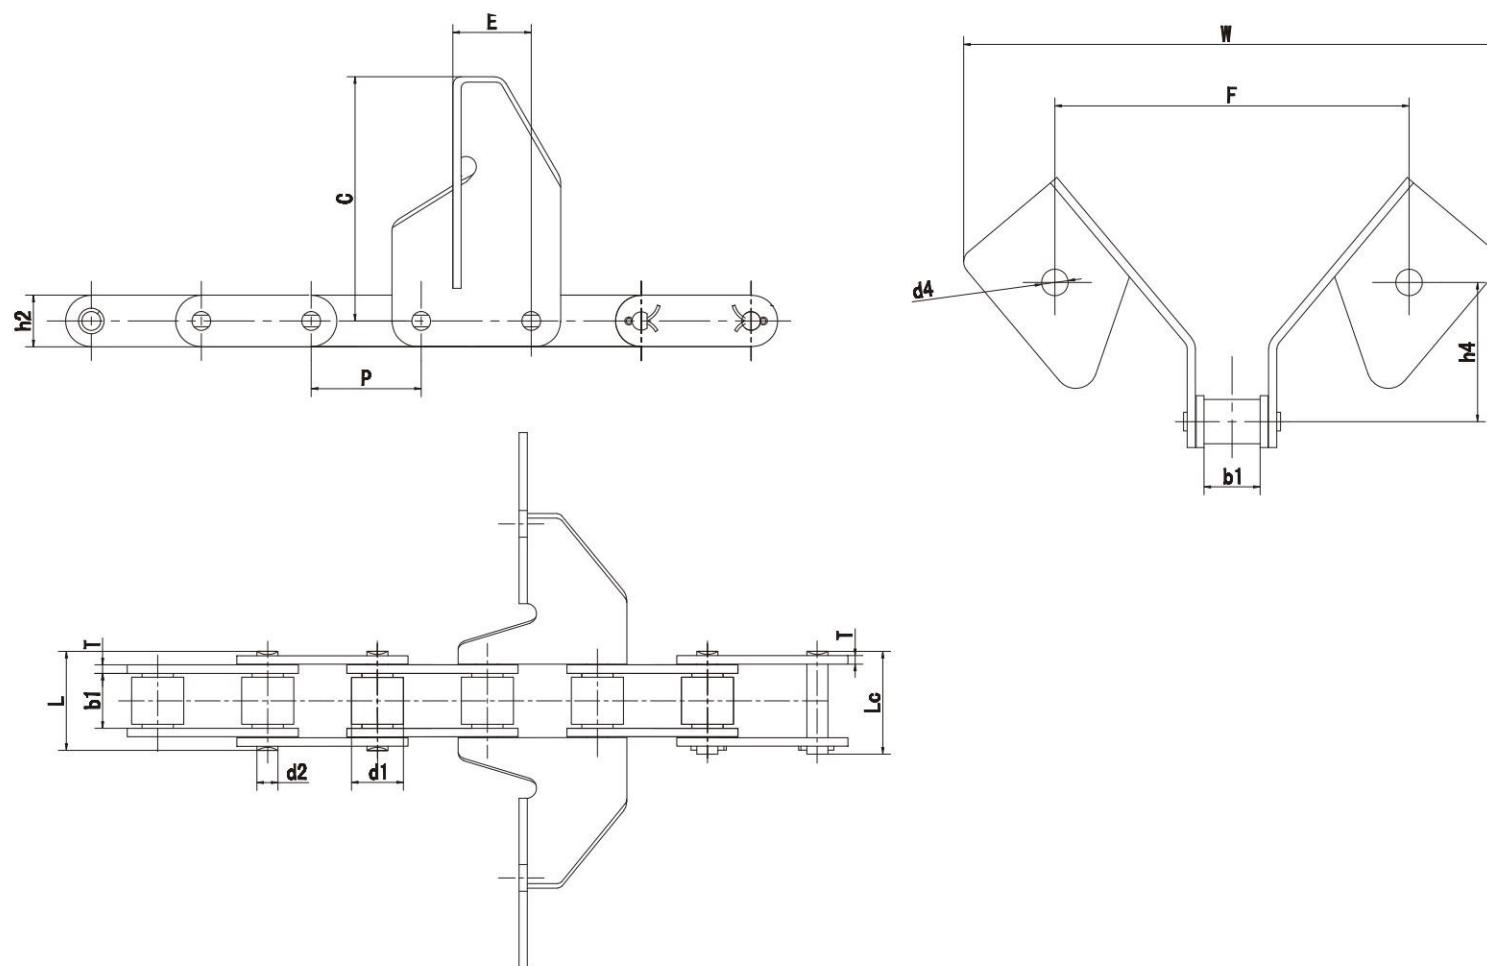


Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length		链板尺寸 Plate Dimension							极限拉伸载荷 Ultimate Tensile Strength	
	$p$	$d_1$ max	$b_1$ min	$d_2$ max	$L$ max	$L_c$ max	$h_2$	$T$	$C$	$W$	$F$	$h_4$	$d_4$	$E$	$Q$ min
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	KN/LB
CA550HDF15	41.4	16.8	19.05	8.02	38.0	41.0	20.2	3.1	91.9	202	133.3	52.4	9.9	40.55	44/9898

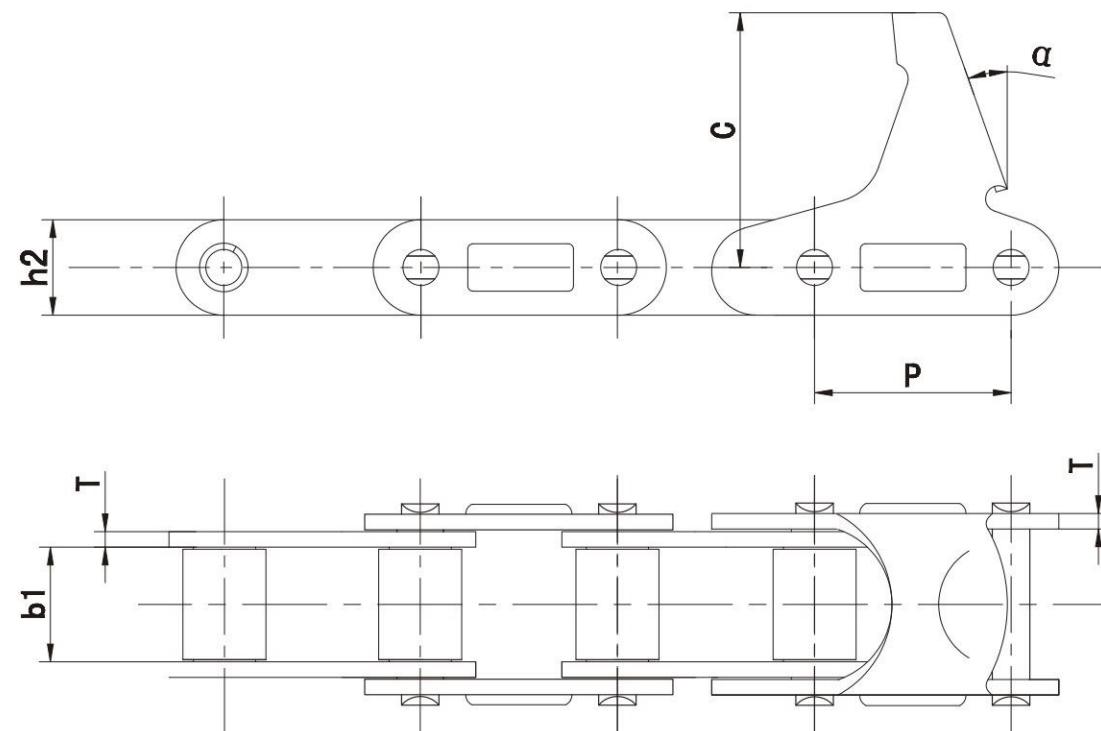


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	α mm
CA550-LV41N	41.4	19.81	19.3	2.8	68.5	15°

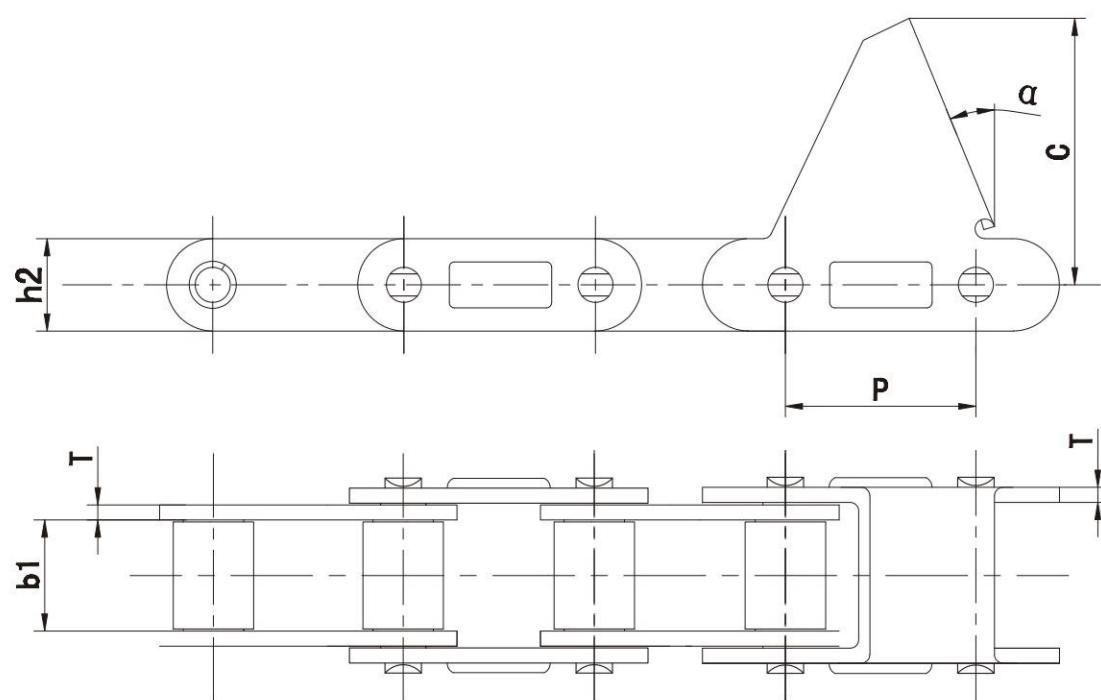


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	α mm
CA550-CPE	41.4	19.81	19.3	2.8	74.5	20°

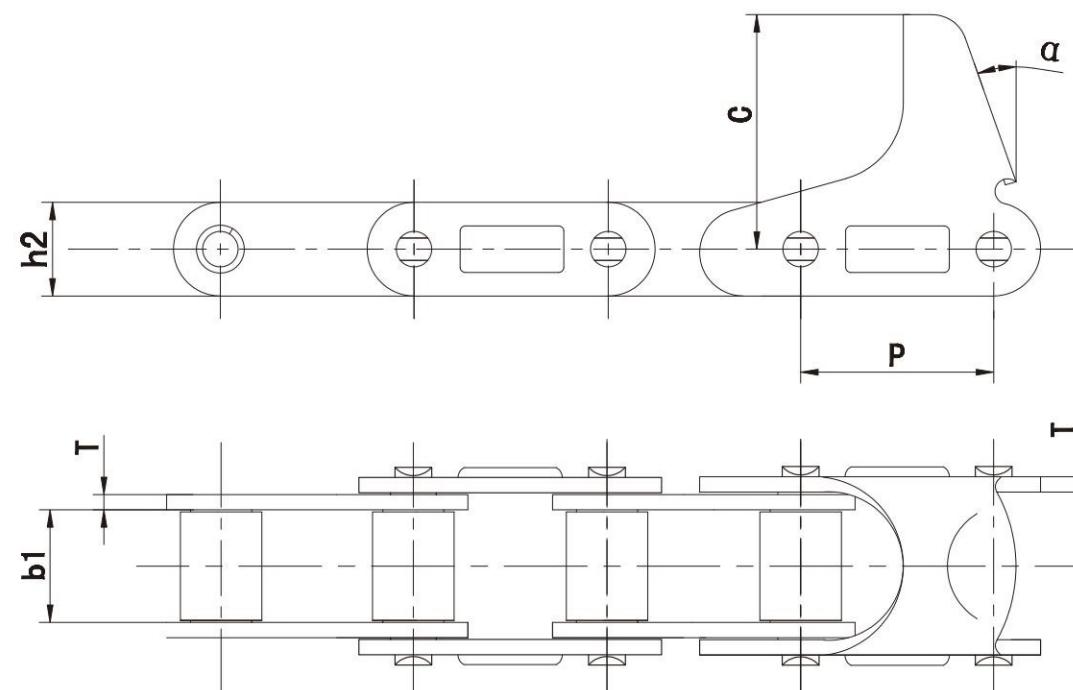


Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	$\alpha$ mm
CA555-C6E	41.40	12.70	19.30	3.10	63.50	15°
CA555-C6EJ	41.40	12.70	19.30	3.25	66.00	15°

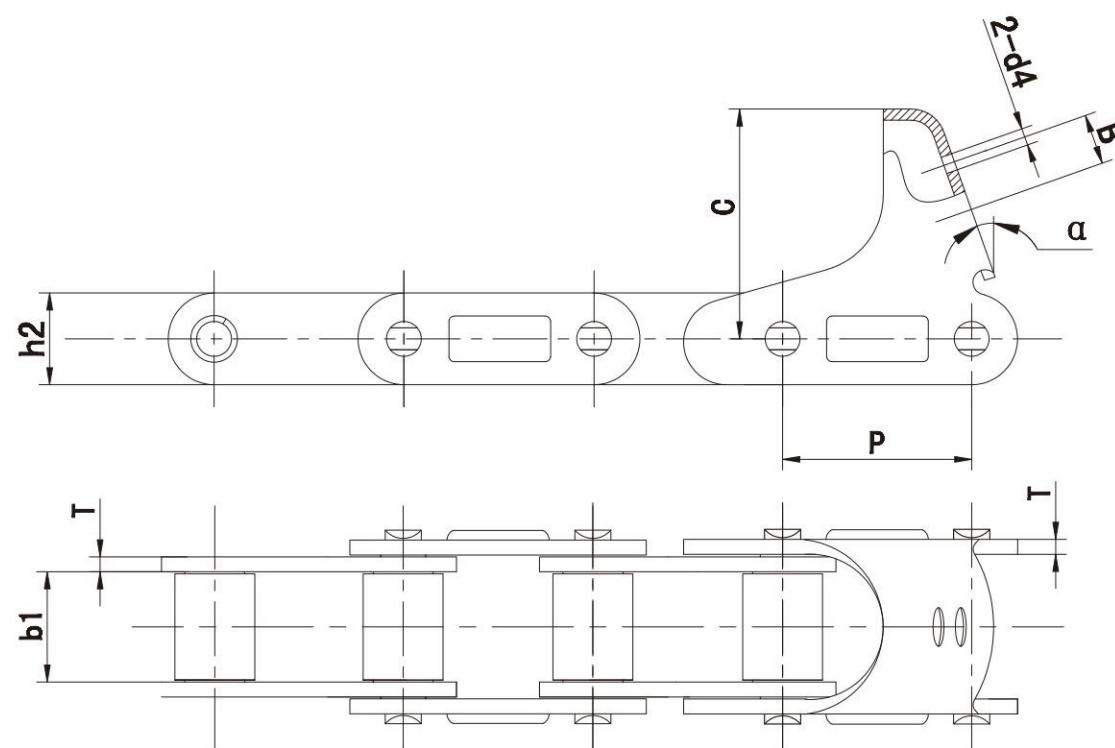

Chain No.	P mm	b1 mm	h2 mm	T mm	C mm	B mm	d4 mm	$\alpha$ mm
CA555-C6EK	41.40	12.70	19.30	3.25	63.50	-	-	15°
CA555-C6EJK	41.40	12.70	19.30	3.25	66.00	25.40	7.30	15°
CA555-C6EJF1K	41.40	12.70	19.30	3.25	66.00	25.40	5.50	15°
CA555-C3E	41.40	12.70	19.30	3.25	61.50	19.00	7.00	10°

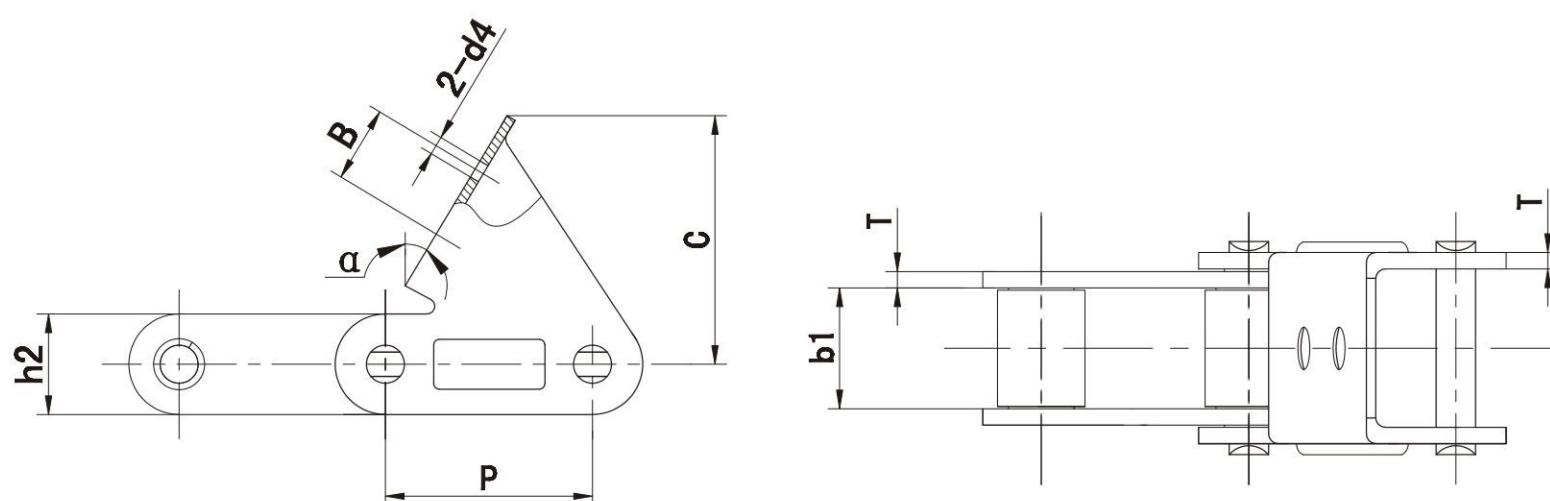

Chain No.	P mm	b1 mm	h2 mm	B mm	d4 mm	T mm	C mm	α mm
CA627-CPE	30.0	19.05	20.5	—	—	3.0	64.0	22°
CA627-CPEF3	30.0	19.05	20.5	30.0	5.0	3.0	64.0	22°

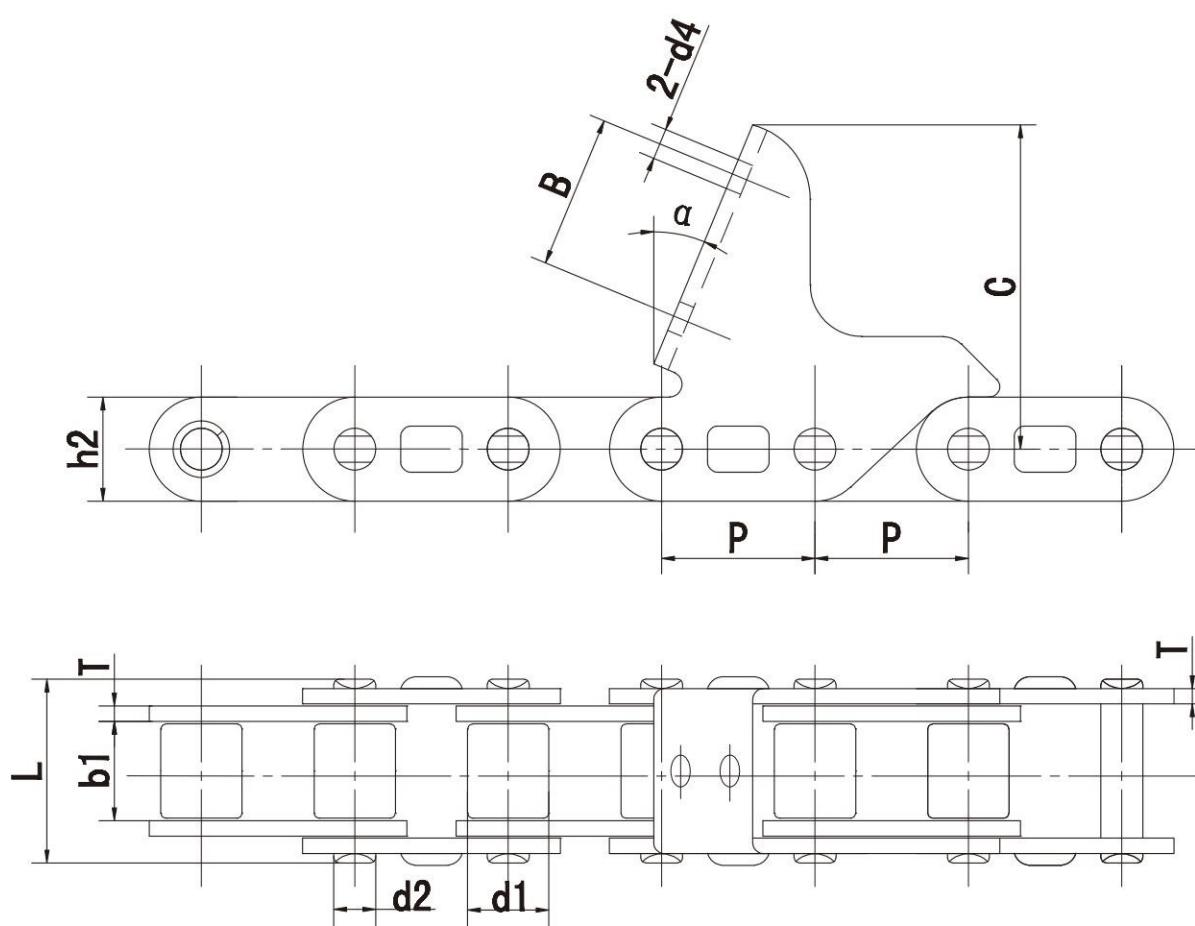

Chain No.	节距 Pitch	滚子直径 Roller Diameter	内节内宽 Width between Inner Plates	销轴直径 Pin Diameter	销轴长度 Pin Length	链板尺寸 Plate Dimension						极限拉伸载荷 Ultimate Tensile Strength KN/LB
	p mm	d1 max mm	b1 min mm	d2 max mm	L max mm	h2 mm	T mm	C mm	α °	B mm	d4 mm	
	mm	mm	mm	mm	mm	mm	mm	mm	°	mm	mm	
CA627-CPEF11	30.0	15.88	19.05	8.28	36.1	20.5	3.0	63.0	22.5	30.0	6.5	50/11248