



SPC/02

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC118-02	2	118	127.6	2	1615	42	—	59.5	68	—	38	21.5	—	2.42
SPC120-02	2	120	129.6	2	1615	42	—	59.5	68	—	38	21.5	—	2.65
SPC140-02	2	140	149.6	2	2012	50	—	59.5	84	—	32	27.5	—	3.49
SPC150-02	2	150	159.6	2	2012	50	—	59.5	94	—	32	27.5	—	3.70
SPC160-02	2	160	169.6	2	2517	60	—	59.5	104	—	45	14.5	—	4.58
SPC170-02	2	170	179.6	2	2517	60	—	59.5	114	—	45	14.5	—	5.38
SPC180-02	2	180	189.6	2	2517	60	—	59.5	124	—	45	14.5	—	6.25
SPC190-02	2	190	199.6	2	2517	60	—	59.5	134	—	45	14.5	—	7.20
SPC200-02	2	200	209.6	2	2517	60	—	59.5	144	—	45	14.5	—	8.23
SPC212-02	2	212	221.6	2	2517	60	—	59.5	156	—	45	14.5	—	9.49
SPC224-02	2	224	233.6	2	3020	75	—	59.5	168	—	51	8.5	—	10.30
SPC236-02	2	236	245.6	2	3020	75	—	59.5	180	—	51	8.5	—	11.90
SPC250-02	2	250	259.6	2	3020	75	—	59.5	194	—	51	8.5	—	13.75
SPC265-02	2	265	274.6	2	3020	75	—	59.5	209	—	51	8.5	—	15.96
SPC280-02	2	280	289.6	2	3020	75	—	59.5	224	—	51	8.5	—	21.26
SPC300-02	2	300	309.6	5	3020	75	—	59.5	244	4.25	51	4.25	144	12.90
SPC315-02	2	315	324.6	5	3020	75	—	59.5	259	4.25	51	4.25	144	13.50
SPC335-02	2	335	344.6	5	3020	75	—	59.5	279	4.25	51	4.25	144	15.42
SPC375-02	2	375	384.6	4	3535	90	—	59.5	319	14.75	89	14.75	175	21.96

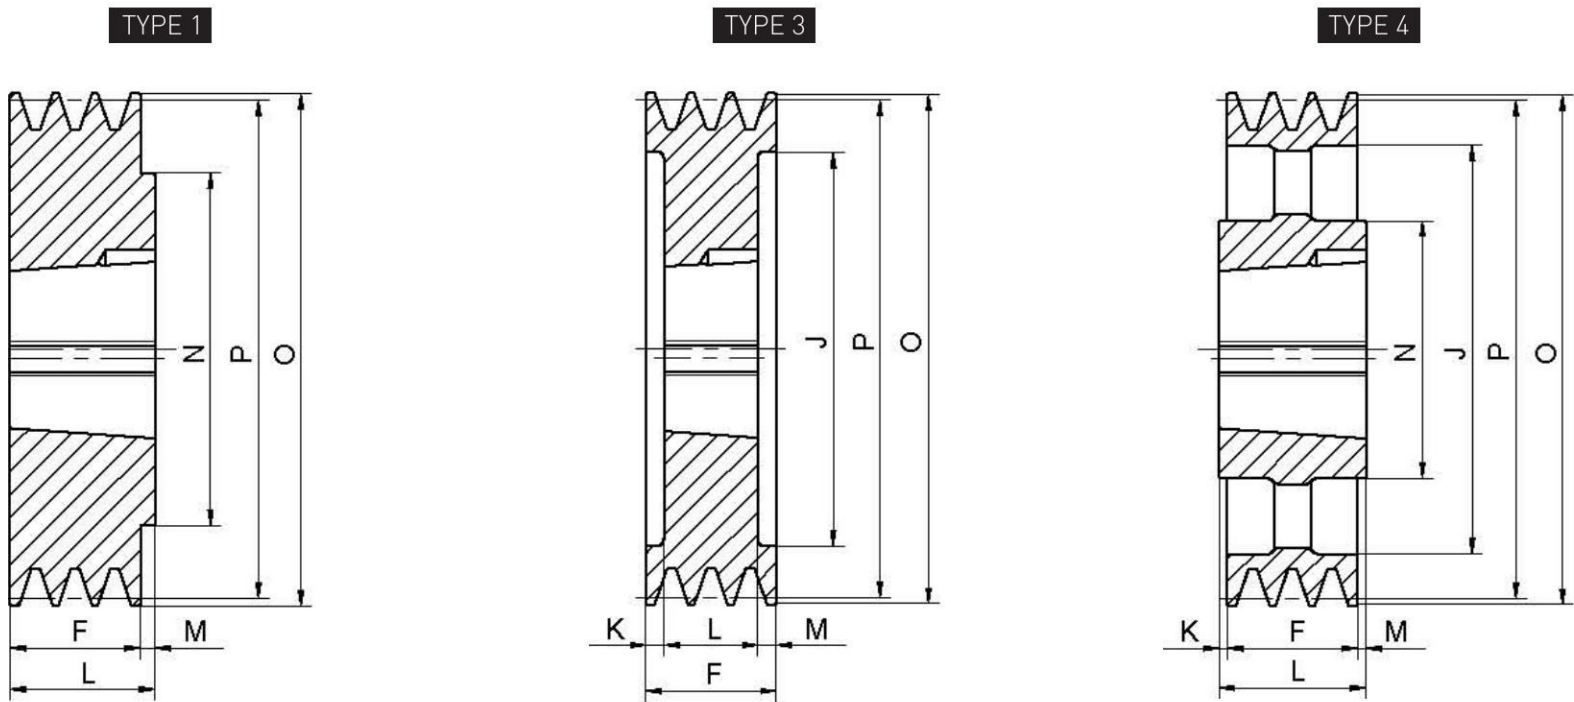


SPC/03

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC140-03	3	140	149.6	3	2012	50	—	85	84	26.5	32	26.5	—	4.67
SPC150-03	3	150	159.6	3	2012	50	—	85	94	26.5	32	26.5	—	5.33
SPC160-03	3	160	169.6	3	2517	60	—	85	104	20	45	20	—	6.10
SPC170-03	3	170	179.6	3	2517	60	—	85	114	20	45	20	—	6.90
SPC175-03	3	175	184.6	3	2517	60	—	85	119	20	45	20	—	7.20
SPC180-03	3	180	189.6	3	2517	60	—	85	124	20	45	20	—	7.94
SPC190-03	3	190	199.6	3	2517	60	—	85	134	20	45	20	—	8.90
SPC200-03	3	200	209.6	3	2517	60	—	85	144	20	45	20	—	10.06
SPC206-03	3	206	215.6	3	2517	60	—	85	150	20	45	20	—	10.80
SPC212-03	3	212	221.6	3	3020	75	—	85	156	17	51	17	—	10.90
SPC218-03	3	218	227.6	3	3020	75	—	85	162	17	51	17	—	11.66
SPC224-03	3	224	233.6	3	3020	75	—	85	168	17	51	17	—	12.35
SPC230-03	3	230	239.6	3	3020	75	—	85	174	17	51	17	—	13.26
SPC232-03	3	232	241.6	3	3020	75	—	85	176	17	51	17	—	13.50
SPC236-03	3	236	245.6	3	3020	75	—	85	180	17	51	17	—	14.05
SPC240-03	3	240	249.6	3	3020	75	—	85	184	17	51	17	—	14.71
SPC243-03	3	243	252.6	3	3020	75	—	85	187	17	51	17	—	15.05
SPC250-03	3	250	259.6	3	3020	75	—	85	194	17	51	17	—	16.15
SPC258-03	3	258	267.6	1	3535	90	—	85	—	—	89	4	175	21.55
SPC265-03	3	265	274.6	1	3535	90	—	85	—	—	89	4	175	23.31
SPC270-03	3	270	279.6	1	3535	90	—	85	—	—	89	4	175	24.56
SPC273-03	3	273	282.6	1	3535	90	—	85	—	—	89	4	175	25.37
SPC274-03	3	274	283.6	1	3535	90	—	85	—	—	89	4	175	26.00
SPC280-03	3	280	289.6	1	3535	90	—	85	—	—	89	4	175	27.05
SPC290-03	3	290	299.6	1	3535	90	—	85	—	—	89	4	175	29.57
SPC300-03	3	300	309.6	4	3535	90	—	85	244	2	89	2	175	20.63
SPC315-03	3	315	324.6	4	3535	90	—	85	259	2	89	2	175	21.91
SPC325-03	3	325	334.6	4	3535	90	—	85	269	2	89	2	175	22.64
SPC335-03	3	335	344.6	4	3535	90	—	85	279	2	89	2	175	23.65
SPC345-03	3	345	354.6	4	3535	90	—	85	289	2	89	2	175	24.00
SPC355-03	3	355	364.6	4	3535	90	—	85	299	2	89	2	175	24.20

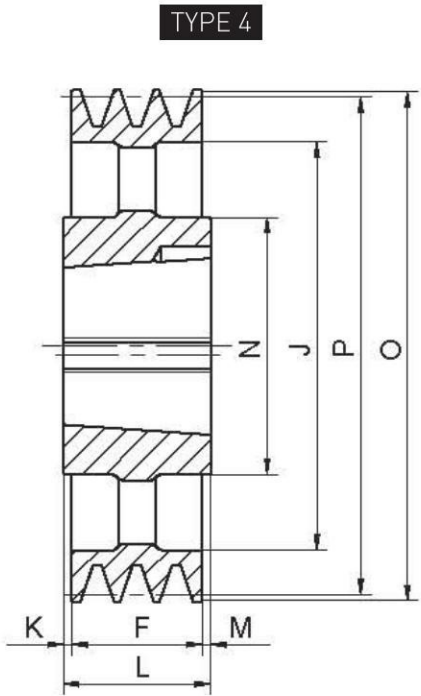


SPC/03

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC358-03	3	358	367.6	4	3535	90	—	85	302	2	89	2	175	25.00
SPC375-03	3	375	384.6	4	3535	90	—	85	319	2	89	2	175	26.19
SPC400-03	3	400	409.6	4	3535	90	—	85	344	2	89	2	175	27.63
SPC425-03	3	425	434.6	4	3535	90	—	85	369	2	89	2	175	29.00
SPC430-03	3	430	439.6	4	3535	90	—	85	374	2	89	2	175	30.00
SPC450-03	3	450	459.6	4	3535	90	—	85	394	2	89	2	175	31.60
SPC475-03	3	475	484.6	4	3535	90	—	85	419	2	89	2	175	33.25
SPC500-03	3	500	509.6	4	3535	90	—	85	444	2	89	2	175	36.30
SPC530-03	3	530	539.6	4	3535	90	—	85	474	2	89	2	175	38.80
SPC560-03	3	560	569.6	4	3535	90	—	85	504	2	89	2	175	40.12
SPC630-03	3	630	639.6	4	4040	100	—	85	574	8.5	102	8.5	210	51.45
SPC710-03	3	710	719.6	4	4040	100	—	85	654	8.5	102	8.5	210	58.00
SPC800-03	3	800	809.6	4	4545	110	—	85	737	14.5	114	14.5	242	79.00
SPC1000-03	3	1000	1009.6	4	5050	125	—	85	937	21	127	21	267	120.50
SPC1250-03	3	1250	1259.6	4	5050	125	—	85	1187	21	127	21	267	136.00

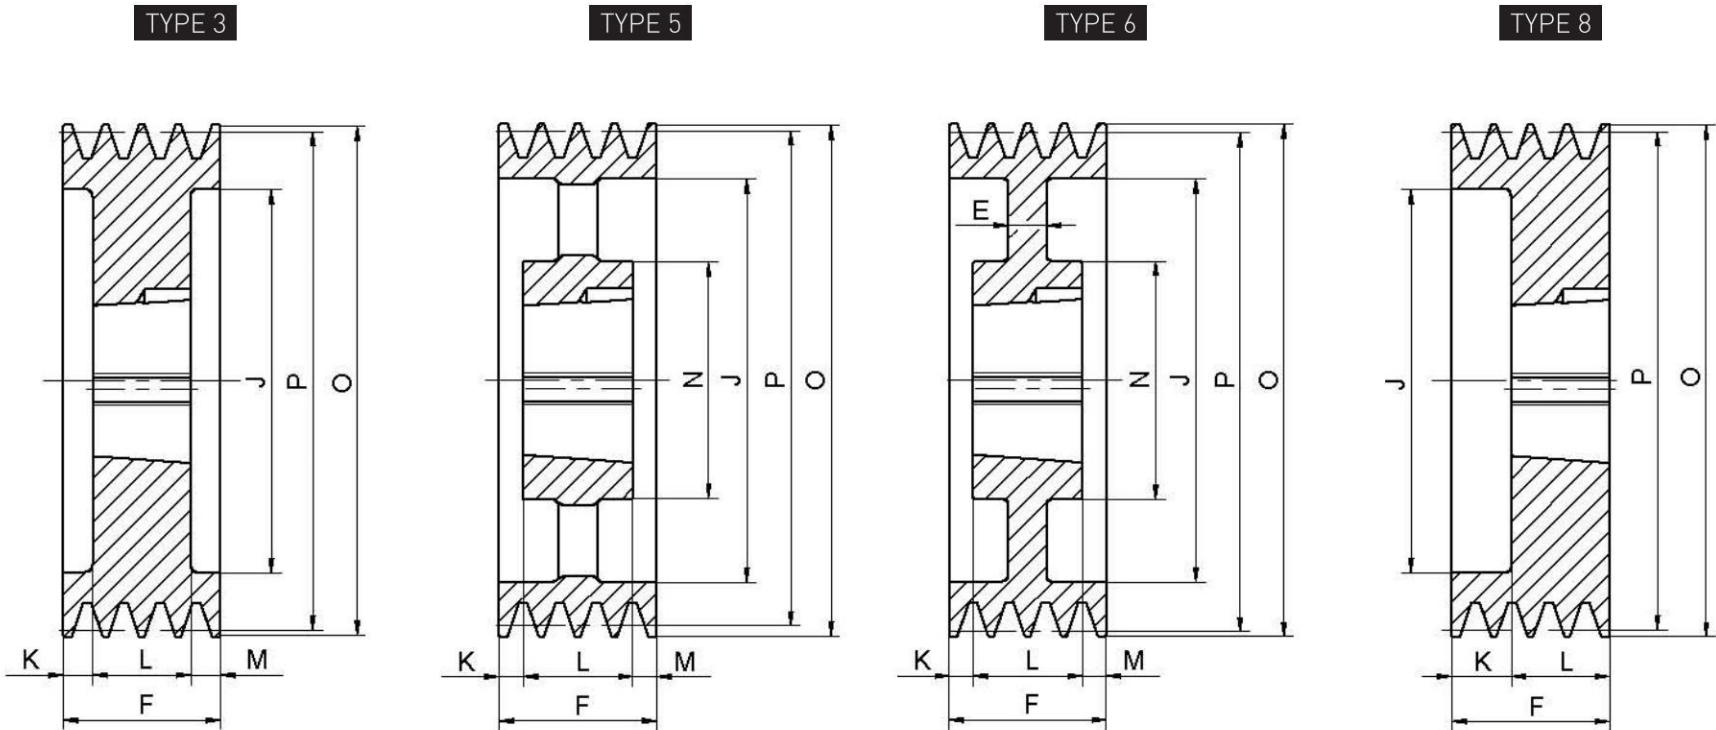


SPC/04

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC125-04	4	125	134.6	8	1615	42	—	111	69	73	38	—	—	5.07
SPC150-04	4	150	159.6	3	2012	50	—	111	94	39.5	32	39.5	—	6.70
SPC160-04	4	160	169.6	3	2517	60	—	111	104	33	45	33	—	7.34
SPC170-04	4	170	179.6	3	3020	75	—	111	120	30	51	30	—	6.90
SPC175-04	4	175	184.6	3	3020	75	—	111	119	30	51	30	—	8.08
SPC180-04	4	180	189.6	3	3020	75	—	111	124	30	51	30	—	8.65
SPC190-04	4	190	199.6	3	3020	75	—	111	134	30	51	30	—	9.82
SPC200-04	4	200	209.6	3	3020	75	—	111	144	30	51	30	—	11.15
SPC206-04	4	206	215.6	3	3020	75	—	111	150	30	51	30	—	11.64
SPC212-04	4	212	221.6	3	3020	75	—	111	156	30	51	30	—	12.76
SPC218-04	4	218	227.6	3	3020	75	—	111	162	30	51	30	—	13.70
SPC224-04	4	224	233.6	3	3535	90	—	111	168	11	89	11	—	16.30
SPC228-04	4	228	237.6	3	3535	90	—	111	172	11	89	11	—	16.87
SPC232-04	4	232	241.6	3	3535	90	—	111	176	11	89	11	—	18.13
SPC236-04	4	236	245.6	3	3535	90	—	111	180	11	89	11	—	18.90
SPC240-04	4	240	249.6	3	3535	90	—	111	184	11	89	11	—	19.99
SPC243-04	4	243	252.6	3	3535	90	—	111	187	11	89	11	—	20.80
SPC250-04	4	250	259.6	3	3535	90	—	111	194	11	89	11	—	22.00
SPC255-04	4	255	264.6	3	3535	90	—	111	199	11	89	11	—	23.80
SPC258-04	4	258	267.6	3	3535	90	—	111	202	11	89	11	—	24.30
SPC265-04	4	265	274.6	3	3535	90	—	111	209	11	89	11	—	26.15
SPC270-04	4	270	279.6	6	3535	90	18	111	214	11	89	11	175	21.50
SPC273-04	4	273	282.6	6	3535	90	18	111	217	11	89	11	175	21.65
SPC280-04	4	280	289.6	6	3535	90	18	111	224	11	89	11	175	22.51
SPC290-04	4	290	299.6	6	3535	90	20	111	234	11	89	11	175	23.76
SPC300-04	4	300	309.6	6	3535	90	20	111	244	11	89	11	175	24.60
SPC308-04	4	308	317.6	6	3535	90	20	111	252	11	89	11	175	25.55
SPC315-04	4	315	324.6	5	3535	90	—	111	259	11	89	11	175	24.73
SPC325-04	4	325	334.6	5	3535	90	—	111	269	11	89	11	175	26.35
SPC335-04	4	335	344.6	5	3535	90	—	111	279	11	89	11	175	27.45

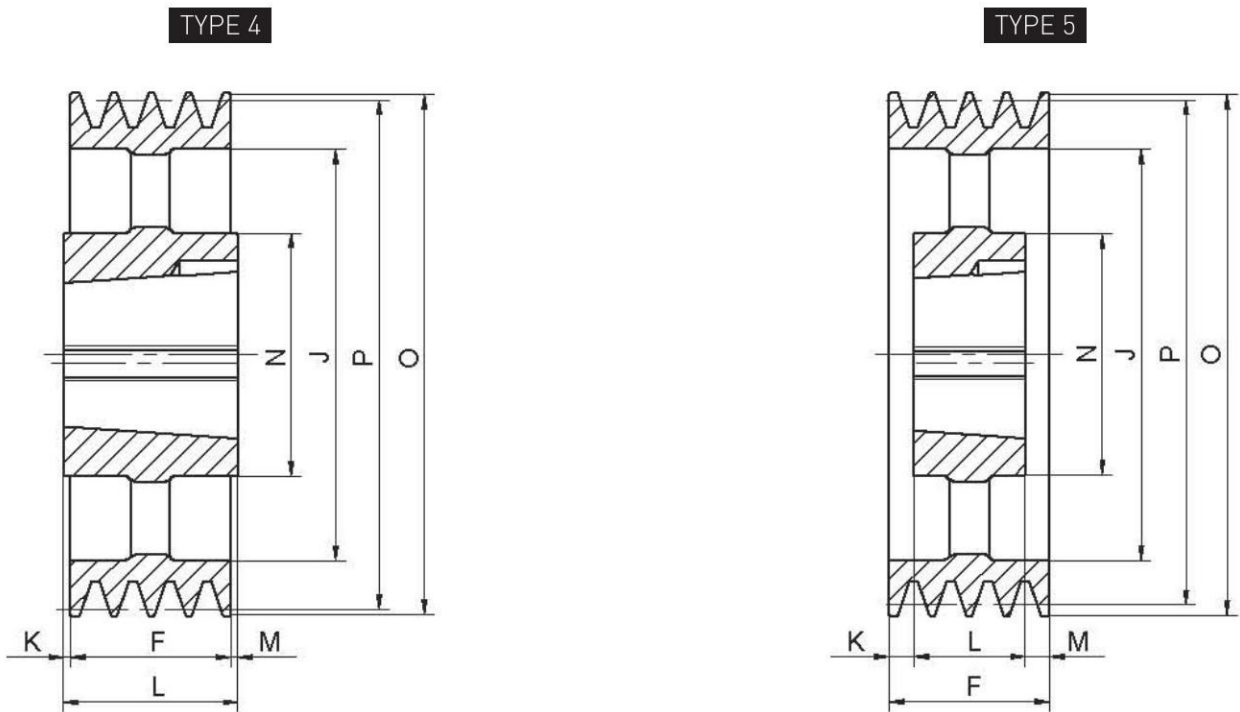


SPC/04

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC345-04	4	345	354.6	5	3535	90	—	111	289	11	89	11	175	28.40
SPC355-04	4	355	364.6	5	3535	90	—	111	299	11	89	11	175	29.15
SPC375-04	4	375	384.6	5	3535	90	—	111	319	11	89	11	175	30.60
SPC400-04	4	400	409.6	5	3535	90	—	111	344	11	89	11	175	33.27
SPC425-04	4	425	434.6	5	3535	90	—	111	369	11	89	11	175	34.95
SPC450-04	4	450	459.6	5	3535	90	—	111	394	11	89	11	175	36.80
SPC475-04	4	475	484.6	5	3535	90	—	111	419	11	89	11	175	38.95
SPC500-04	4	500	509.6	5	3535	90	—	111	444	11	89	11	175	42.60
SPC530-04	4	530	539.6	5	4040	100	—	111	474	4.5	102	4.5	210	51.05
SPC560-04	4	560	569.6	5	4040	100	—	111	504	4.5	102	4.5	210	53.15
SPC630-04	4	630	639.6	4	4545	110	—	111	574	1.5	114	1.5	242	68.20
SPC710-04	4	710	719.6	4	5050	125	—	111	654	8	127	8	267	86.16
SPC800-04	4	800	809.6	4	5050	125	—	111	737	8	127	8	267	97.15
SPC1000-04	4	1000	1009.6	4	5050	125	—	111	937	8	127	8	267	125.00
SPC1250-04	4	1250	1259.6	4	5050	125	—	111	1187	8	127	8	267	166.00

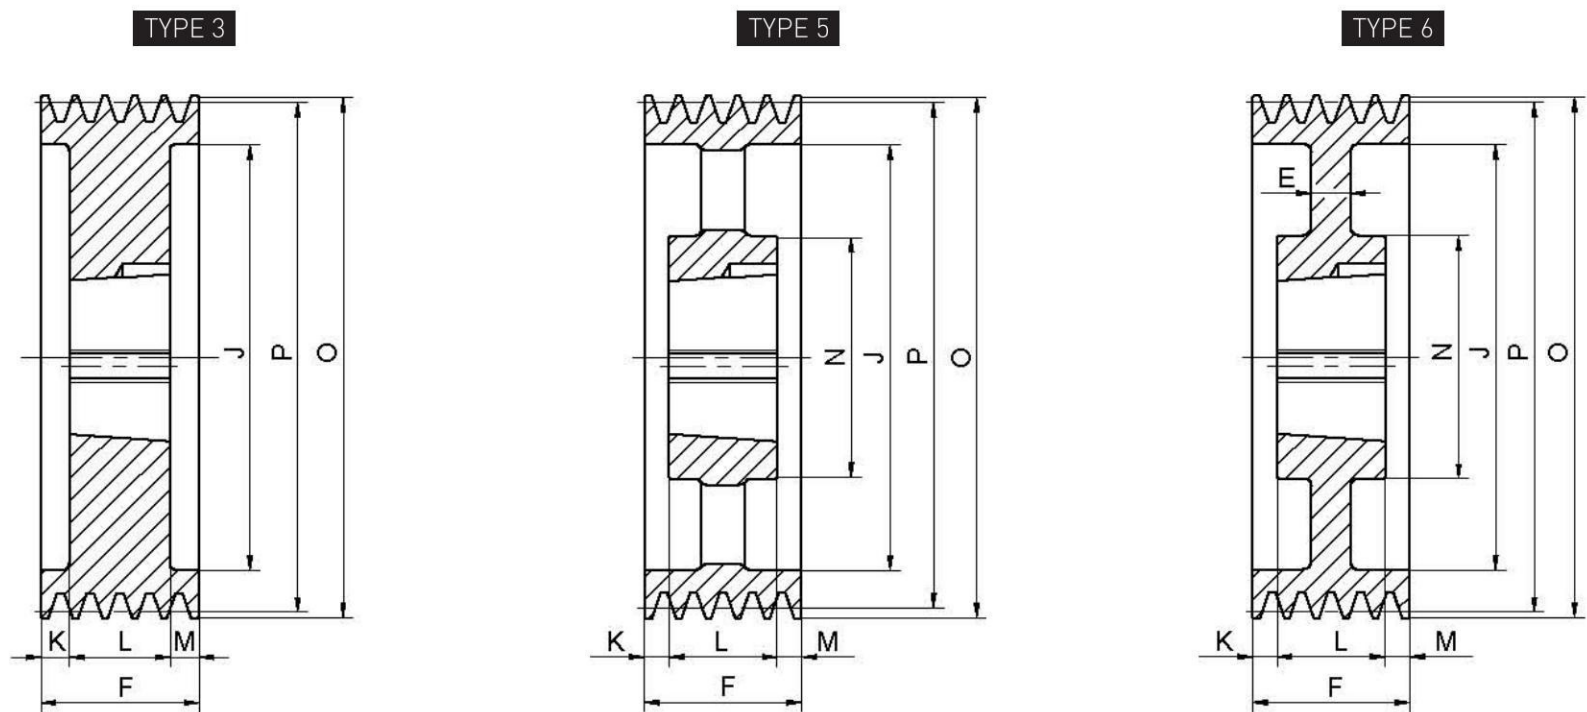


SPC/05

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC150-05	5	150	159.6	3	2012	50	—	136	94	52	32	52	—	8.00
SPC170-05	5	170	179.6	3	3020	75	—	136	119	42.5	51	42.5	—	8.22
SPC190-05	5	190	199.6	3	3020	75	—	136	134	42.5	51	42.5	—	11.53
SPC200-05	5	200	209.6	3	3535	90	—	136	144	23.5	89	23.5	—	13.07
SPC212-05	5	212	221.6	3	3535	90	—	136	156	23.5	89	23.5	—	15.60
SPC218-05	5	218	227.6	3	3535	90	—	136	162	23.5	89	23.5	—	16.88
SPC224-05	5	224	233.6	3	3535	90	—	136	168	23.5	89	23.5	—	18.30
SPC236-05	5	236	245.6	3	3535	90	—	136	180	23.5	89	23.5	—	21.17
SPC250-05	5	250	259.6	3	3535	90	—	136	194	23.5	89	23.5	—	24.55
SPC258-05	5	258	267.6	3	3535	90	—	136	202	23.5	89	23.5	—	27.00
SPC260-05	5	260	269.6	3	3535	90	—	136	204	23.5	89	23.5	—	27.28
SPC265-05	5	265	274.6	3	3535	90	—	136	209	23.5	89	23.5	—	28.69
SPC280-05	5	280	289.6	3	3535	90	—	136	224	23.5	89	23.5	—	32.81
SPC300-05	5	300	309.6	6	3535	90	20	136	244	23.5	89	23.5	175	29.80
SPC315-05	5	315	324.6	5	3535	90	—	136	259	23.5	89	23.5	175	28.21
SPC335-05	5	335	344.6	5	3535	90	—	136	279	23.5	89	23.5	175	30.70
SPC350-05	5	350	359.6	5	3535	90	—	136	294	23.5	89	23.5	175	32.02
SPC355-05	5	355	364.6	5	3535	90	—	136	299	23.5	89	23.5	175	33.12
SPC375-05	5	375	384.6	5	3535	90	—	136	319	23.5	89	23.5	175	34.72
SPC400-05	5	400	409.6	5	3535	90	—	136	344	23.5	89	23.5	175	37.40
SPC415-05	5	415	424.6	5	3535	90	—	136	359	23.5	89	23.5	175	38.00
SPC425-05	5	425	434.6	5	3535	90	—	136	369	23.5	89	23.5	175	40.40
SPC450-05	5	450	459.6	5	4040	100	—	136	394	17	102	17	210	48.10
SPC475-05	5	475	484.6	5	4040	100	—	136	419	17	102	17	210	50.70
SPC500-05	5	500	509.6	5	4040	100	—	136	444	17	102	17	210	54.00
SPC530-05	5	530	539.6	5	4545	110	—	136	474	11	114	11	240	64.07
SPC560-05	5	560	569.6	5	4545	110	—	136	504	11	114	11	242	66.77
SPC630-05	5	630	639.6	5	5050	125	—	136	574	4.5	127	4.5	267	82.00
SPC710-05	5	710	719.6	5	5050	125	—	136	654	4.5	127	4.5	267	93.20
SPC800-05	5	800	809.6	5	5050	125	—	136	737	4.5	127	4.5	267	110.00
SPC900-05	5	900	909.6	5	5050	125	—	136	837	4.5	127	4.5	267	135.00
SPC1000-05	5	1000	1009.6	5	5050	125	—	136	937	4.5	127	4.5	267	154.00
SPC1120-05	5	1120	1129.6	5	5050	125	—	136	1057	4.5	127	4.5	267	194.35
SPC1250-05	5	1250	1259.6	5	5050	125	—	136	1187	4.5	127	4.5	267	188.00

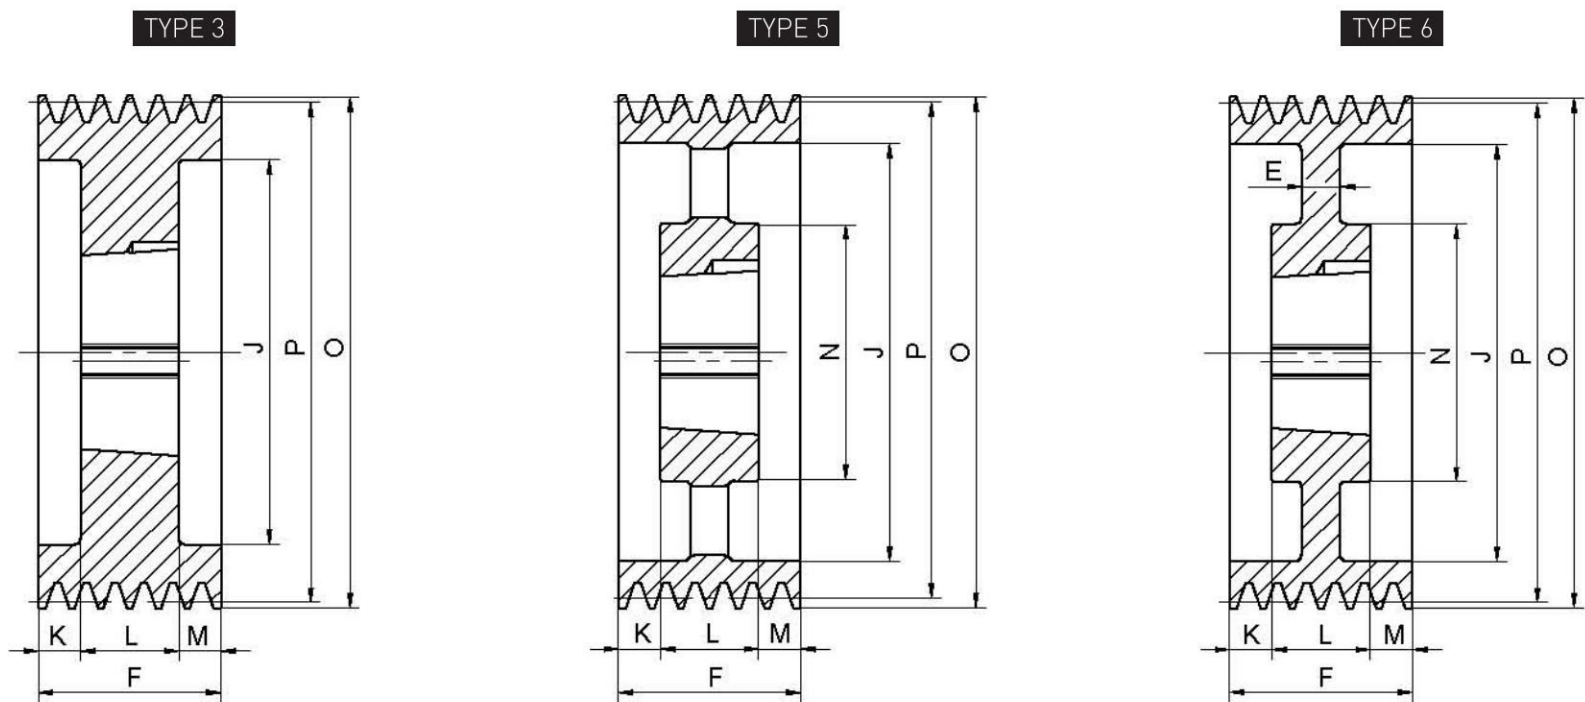


SPC/06

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC180-06	6	180	189.6	3	3020	75	—	162	124	55.5	51	55.5	—	11.88
SPC190-06	6	190	199.6	3	3020	75	—	162	134	55.5	51	55.5	—	12.50
SPC200-06	6	200	209.6	3	3535	90	—	162	144	36.5	89	36.5	—	14.80
SPC212-06	6	212	221.6	3	3535	90	—	162	156	36.5	89	36.5	—	17.70
SPC224-06	6	224	233.6	3	3535	90	—	162	168	36.5	89	36.5	—	20.30
SPC228-06	6	228	237.6	3	3535	90	—	162	172	36.5	89	36.5	—	21.51
SPC232-06	6	232	241.6	3	3535	90	—	162	172	36.5	89	36.5	—	23.00
SPC236-06	6	236	245.6	3	3535	90	—	162	180	36.5	89	36.5	—	23.31
SPC240-06	6	240	249.6	3	3535	90	—	162	184	36.5	89	36.5	—	24.52
SPC243-06	6	243	252.6	3	3535	90	—	162	187	36.5	89	36.5	—	25.15
SPC245-06	6	245	254.6	3	3535	90	—	162	189	36.5	89	36.5	—	26.80
SPC250-06	6	250	259.6	3	3535	90	—	162	194	36.5	89	36.5	—	27.17
SPC258-06	6	258	267.6	3	3535	90	—	162	202	36.5	89	36.5	—	29.19
SPC265-06	6	265	274.6	3	3535	90	—	162	209	36.5	89	36.5	—	31.23
SPC273-06	6	273	282.6	6	3535	90	20	162	217	36.5	89	36.5	175	28.60
SPC280-06	6	280	289.6	6	3535	90	20	162	224	36.5	89	36.5	175	28.90
SPC290-06	6	290	299.6	6	3535	90	20	162	234	36.5	89	36.5	175	29.42
SPC300-06	6	300	309.6	6	3535	90	20	162	244	36.5	89	36.5	175	30.35
SPC308-06	6	308	317.6	6	3535	90	20	162	252	36.5	89	36.5	175	31.80
SPC315-06	6	315	324.6	5	3535	90	—	162	259	36.5	89	36.5	175	31.35
SPC335-06	6	335	344.6	5	3535	90	—	162	279	36.5	89	36.5	175	35.00
SPC345-06	6	345	354.6	5	3535	90	—	162	289	36.5	89	36.5	175	36.19
SPC355-06	6	355	364.6	5	3535	90	—	162	299	36.5	89	36.5	175	37.10
SPC375-06	6	375	384.6	5	4040	100	—	162	319	30.0	102	30.0	210	45.05
SPC385-06	6	385	394.6	5	4040	100	—	162	329	30.0	102	30.0	210	45.30
SPC400-06	6	400	409.6	5	4040	100	—	162	344	30.0	102	30.0	210	47.76
SPC425-06	6	425	434.6	5	4040	100	—	162	369	30.0	102	30.0	210	50.25
SPC435-06	6	435	444.6	5	4040	100	—	162	379	30.0	102	30.0	210	52.88
SPC440-06	6	440	449.6	5	4545	110	—	162	384	24.0	114	24.0	242	58.90
SPC450-06	6	450	459.6	5	4545	110	—	162	394	24.0	114	24.0	242	60.98
SPC475-06	6	475	484.6	5	4545	110	—	162	419	24.0	114	24.0	242	63.00
SPC500-06	6	500	509.6	5	4545	110	—	162	444	24	114	24	242	67.60
SPC530-06	6	530	539.6	5	5050	125	—	162	474	17.5	127	17.5	265	76.70
SPC560-06	6	560	569.6	5	5050	125	—	162	504	17.5	127	17.5	267	81.40

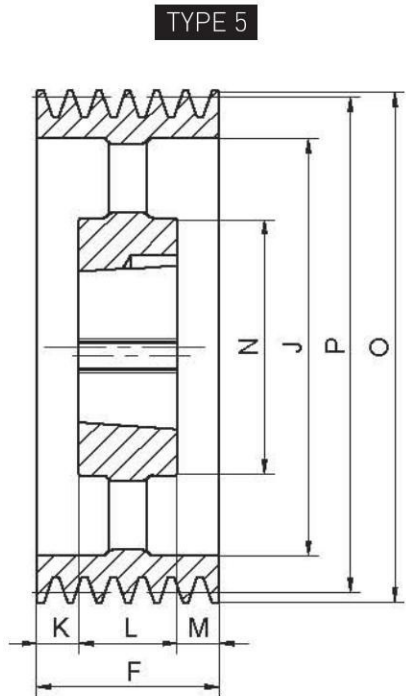


SPC/06

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC600-06	6	600	609.6	5	5050	125	—	162	544	17.5	127	17.5	267	85.45
SPC630-06	6	630	639.6	5	5050	125	—	162	574	17.5	127	17.5	267	89.70
SPC710-06	6	710	719.6	5	5050	125	—	162	654	17.5	127	17.5	267	102.60
SPC800-06	6	800	809.6	5	5050	125	—	162	737	17.5	127	17.5	267	123.60
SPC860-06	6	860	869.6	5	5050	125	—	162	797	17.5	127	17.5	267	133.00
SPC932-06	6	932	941.6	5	5050	125	—	162	869	17.5	127	17.5	267	145.61
SPC1000-06	6	1000	1009.6	5	5050	125	—	162	937	17.5	127	17.5	267	160.00
SPC1120-06	6	1120	1129.6	5	5050	125	—	162	1057	17.5	127	17.5	267	184.50
SPC1250-06	6	1250	1259.6	5	5050	125	—	162	1187	17.5	127	17.5	267	201.00
SPC1400-06	6	1400	1409.6	5	6050	160	—	162	1337	17.5	127	17.5	432	315.00
SPC1600-06	6	1600	1609.6	5	6050	160	—	162	1537	17.5	127	17.5	432	387.00
SPC1700-06	6	1700	1709.6	5	6050	160	—	162	1637	17.5	127	17.5	432	389.00

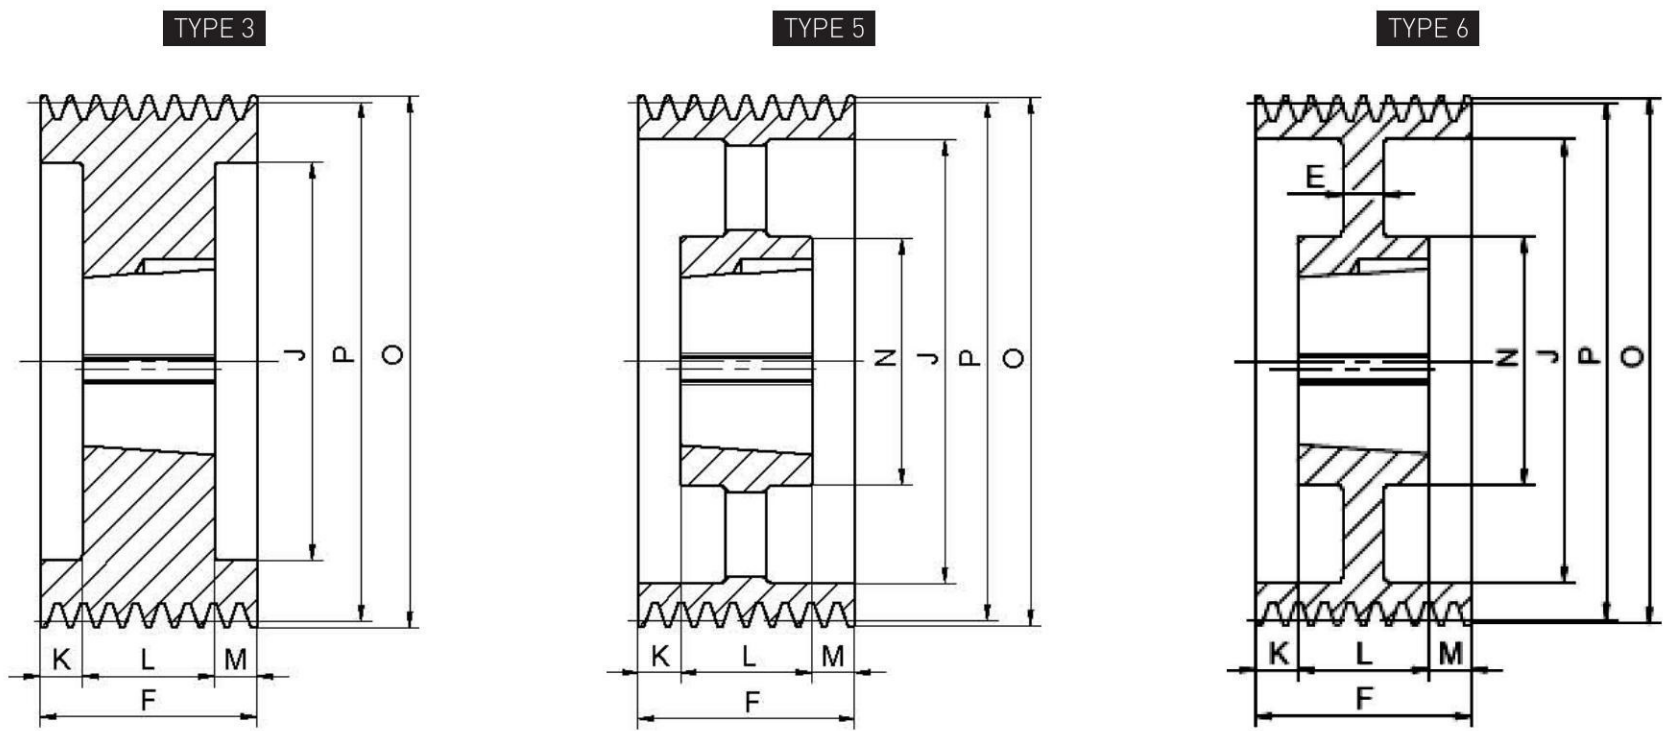


SPC/08

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC200-08	8	200	209.6	3	3535	90	—	213	144	62	89	62	—	18.52
SPC212-08	8	212	221.6	3	3535	90	—	213	156	62	89	62	—	21.50
SPC224-08	8	224	233.6	3	3535	90	—	213	168	62	89	62	—	24.85
SPC236-08	8	236	245.6	3	3535	90	—	213	180	62	89	62	—	27.60
SPC250-08	8	250	259.6	3	3535	90	—	213	194	62	89	62	—	31.90
SPC265-08	8	265	274.6	3	3535	90	—	213	209	62	89	62	—	36.35
SPC280-08	8	280	289.6	3	3535	90	—	213	224	62	89	62	—	40.60
SPC300-08	8	300	309.6	3	4040	100	—	213	244	55.5	102	55.5	—	47.71
SPC315-08	8	315	324.6	3	4040	100	—	213	259	55.5	102	55.5	—	53.92
SPC335-08	8	335	344.6	6	4040	100	50	213	279	55.5	102	55.5	210	53.00
SPC355-08	8	355	364.6	5	4040	100	—	213	299	55.5	102	55.5	210	50.67
SPC375-08	8	375	384.6	5	4545	110	—	213	319	49.5	114	49.5	242	60.15
SPC400-08	8	400	409.6	5	4545	110	—	213	344	49.5	114	49.5	242	65.10
SPC425-08	8	425	434.6	5	4545	110	—	213	369	49.5	114	49.5	242	68.11
SPC450-08	8	450	459.6	5	5050	125	—	213	394	43.0	127	43.0	267	77.33
SPC475-08	8	475	484.6	5	5050	125	—	213	419	43.0	127	43.0	267	85.20
SPC500-08	8	500	509.6	5	5050	125	—	213	444	43.0	127	43.0	267	88.70
SPC530-08	8	530	539.6	5	5050	125	—	213	474	43.0	127	43.0	267	94.05
SPC560-08	8	560	569.6	5	5050	125	—	213	504	43	127	43	267	95.80
SPC600-08	8	600	609.6	5	5050	125	—	213	544	43	127	43	267	102.16
SPC630-08	8	630	639.6	5	5050	125	—	213	574	43	127	43	267	106.00
SPC680-08	8	680	689.6	5	5050	125	—	213	624	43	127	43	267	117.50
SPC710-08	8	710	719.6	5	5050	125	—	213	654	43	127	43	267	124.00
SPC800-08	8	800	809.6	5	5050	125	—	213	737	43	127	43	267	150.00
SPC900-08	8	900	909.6	5	5050	125	—	213	837	43	127	43	267	173.00
SPC1000-08	8	1000	1009.6	5	5050	125	—	213	937	43	127	43	267	191.00
SPC1120-08	8	1120	1129.6	5	5050	125	—	213	1057	43	127	43	267	234.00
SPC1250-08	8	1250	1259.6	5	5050	125	—	213	1187	43	127	43	267	255.00
SPC1400-08	8	1400	1409.6	5	6050	150	—	213	1337	43	127	43	432	384.00
SPC1600-08	8	1600	1609.6	5	6050	150	—	213	1537	43	127	43	432	510.00

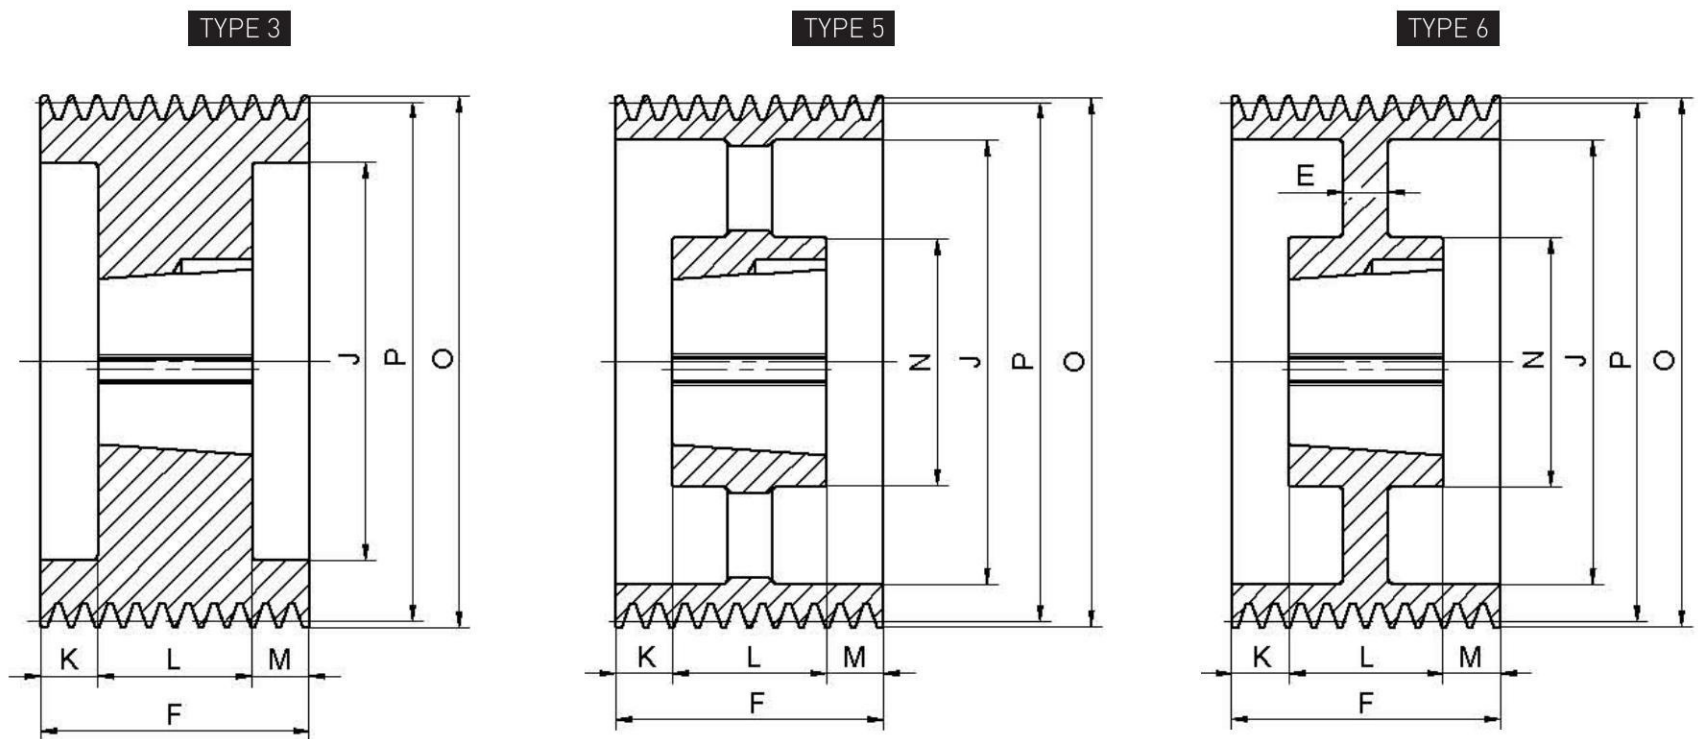

SPC/10

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC200-10	10	200	209.6	3	3535	90	—	264	144	87.5	89	87.5	—	22.05
SPC224-10	10	224	233.6	3	4040	100	—	264	168	81	102	81	—	27.00
SPC230-10	10	230	239.6	3	4040	100	—	264	174	81	102	81	—	28.60
SPC236-10	10	236	245.6	3	4040	100	—	264	180	81	102	81	—	30.29
SPC250-10	10	250	259.6	3	4040	100	—	264	194	81	102	81	—	35.35
SPC265-10	10	265	274.6	3	4040	100	—	264	209	81	102	81	—	40.67
SPC280-10	10	280	289.6	3	4040	100	—	264	224	81	102	81	—	45.92
SPC290-10	10	290	299.6	3	4545	110	—	264	234	75	114	75	—	50.00
SPC300-10	10	300	309.6	3	4545	110	—	264	244	75	114	75	—	54.00
SPC315-10	10	315	324.6	3	4545	110	—	264	259	75	114	75	—	59.70
SPC325-10	10	325	334.6	3	4545	110	—	264	269	75	114	75	—	66.40
SPC335-10	10	335	344.6	3	4545	110	—	264	279	75	114	75	—	71.00
SPC340-10	10	340	349.6	3	4545	110	—	264	284	75	114	75	—	73.82
SPC355-10	10	355	364.6	3	4545	110	—	264	299	75	114	75	—	80.50
SPC360-10	10	360	369.6	3	4545	110	—	264	304	75	114	75	—	83.83
SPC375-10	10	375	384.6	3	4545	110	—	264	319	75	114	75	—	91.00
SPC400-10	10	400	409.6	6	5050	125	70	264	344	68.5	127	68.5	267	92.00
SPC425-10	10	425	434.6	6	5050	125	50	264	369	68.5	127	68.5	267	96.20
SPC450-10	10	450	459.6	5	5050	125	—	264	394	68.5	127	68.5	267	89.40
SPC475-10	10	475	484.6	5	5050	125	—	264	419	68.5	127	68.5	267	93.20
SPC500-10	10	500	509.6	5	5050	125	—	264	444	68.5	127	68.5	267	100.00
SPC530-10	10	530	539.6	5	5050	125	—	264	474	68.5	127	68.5	267	109.00
SPC560-10	10	560	569.6	5	5050	125	—	264	504	68.5	127	68.5	267	114.00
SPC590-10	10	590	599.6	5	5050	125	—	264	534	68.5	127	68.5	267	118.00
SPC630-10	10	630	639.6	5	5050	125	—	264	574	68.5	127	68.5	267	128.00
SPC710-10	10	710	719.6	5	5050	125	—	264	654	68.5	127	68.5	267	148.00
SPC800-10	10	800	809.6	5	5050	125	—	264	737	68.5	127	68.5	267	174.00
SPC900-10	10	900	909.6	5	5050	125	—	264	837	68.5	127	68.5	267	209.30
SPC1000-10	10	1000	1009.6	5	5050	125	—	264	937	68.5	127	68.5	267	222.00
SPC1250-10	10	1250	1259.6	5	5050	125	—	264	1187	68.5	127	68.5	267	311.00
SPC1600-10	10	1600	1609.6	5	5050	125	—	264	1537	68.5	127	68.5	288	460.00
SPC1700-10	10	1700	1709.6	5	7060	175	—	264	1637	56	152	56	500	488.75
SPC1900-10	10	1900	1909.6	5	7060	175	—	264	1837	56	152	56	500	752.00

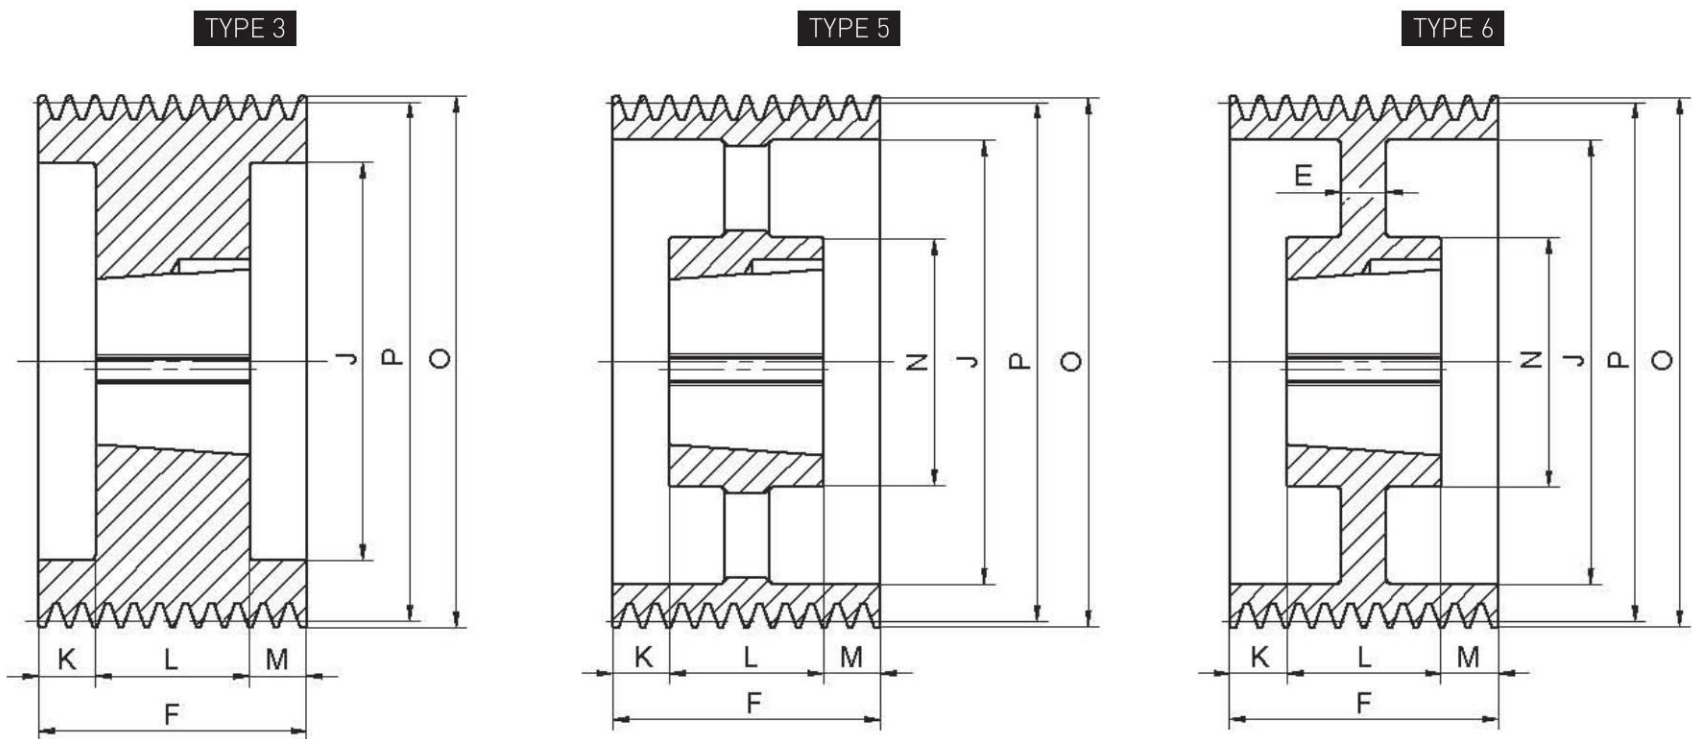

SPC/12

Product Model	Grooves	P	O	TYPE	BUSH	MAX Bore	E	F	J	K	L	M	N	Weight (Kg)
SPC265-12	12	265	274.6	3	4545	110	—	315	209	100.5	114	100.5	—	44.00
SPC280-12	12	280	289.6	3	4545	110	—	315	224	100.5	114	100.5	—	51.10
SPC300-12	12	300	309.6	3	4545	110	—	315	244	100.5	114	100.5	—	58.50
SPC315-12	12	315	324.6	3	5050	125	—	315	259	94	127	94	—	66.30
SPC325-12	12	325	334.6	3	5050	125	—	315	269	94	127	94	—	74.50
SPC335-12	12	335	344.6	3	5050	125	—	315	279	94	127	94	—	76.00
SPC355-12	12	355	364.6	6	5050	125	50	315	299	94	127	94	267	88.00
SPC375-12	12	375	384.6	6	5050	125	50	315	319	94	127	94	267	90.00
SPC400-12	12	400	409.6	6	5050	125	50	315	344	94	127	94	267	96.00
SPC450-12	12	450	459.6	6	5050	125	50	315	394	94	127	94	267	116.00
SPC475-12	12	475	484.6	6	5050	125	50	315	419	94	127	94	267	123.00
SPC500-12	12	500	509.6	6	5050	125	45	315	444	94	127	94	267	128.00
SPC600-12	12	600	609.6	5	5050	125	45	315	544	94	127	94	267	142.00
SPC630-12	12	630	639.6	5	5050	125	45	315	574	94	127	94	267	147.00
SPC710-12	12	710	719.6	5	5050	125	45	315	654	94	127	94	267	166.00
SPC800-12	12	800	809.6	5	5050	125	45	315	737	94	127	94	267	208.00
SPC1000-12	12	1000	1009.6	5	5050	125	50	315	937	94	127	94	267	236.00
SPC1250-12	12	1250	1259.6	5	5050	125	45	315	1187	94	127	94	267	350.00
SPC1400-12	12	1400	1409.6	5	7060	175	50	315	1337	81.5	152	81.5	500	551.00