


>> DIN 705 Form B Adjusting Rings --- 101 Series

Technology information:

1. Our company strictly as per the German standard DIN705 production
2. Material: mild steel; Surface treatment: plain, black oxide, zinc plated, yellow zinc plated.
3. Material: stainless steel(304); Surface treatment: plain, passivation.

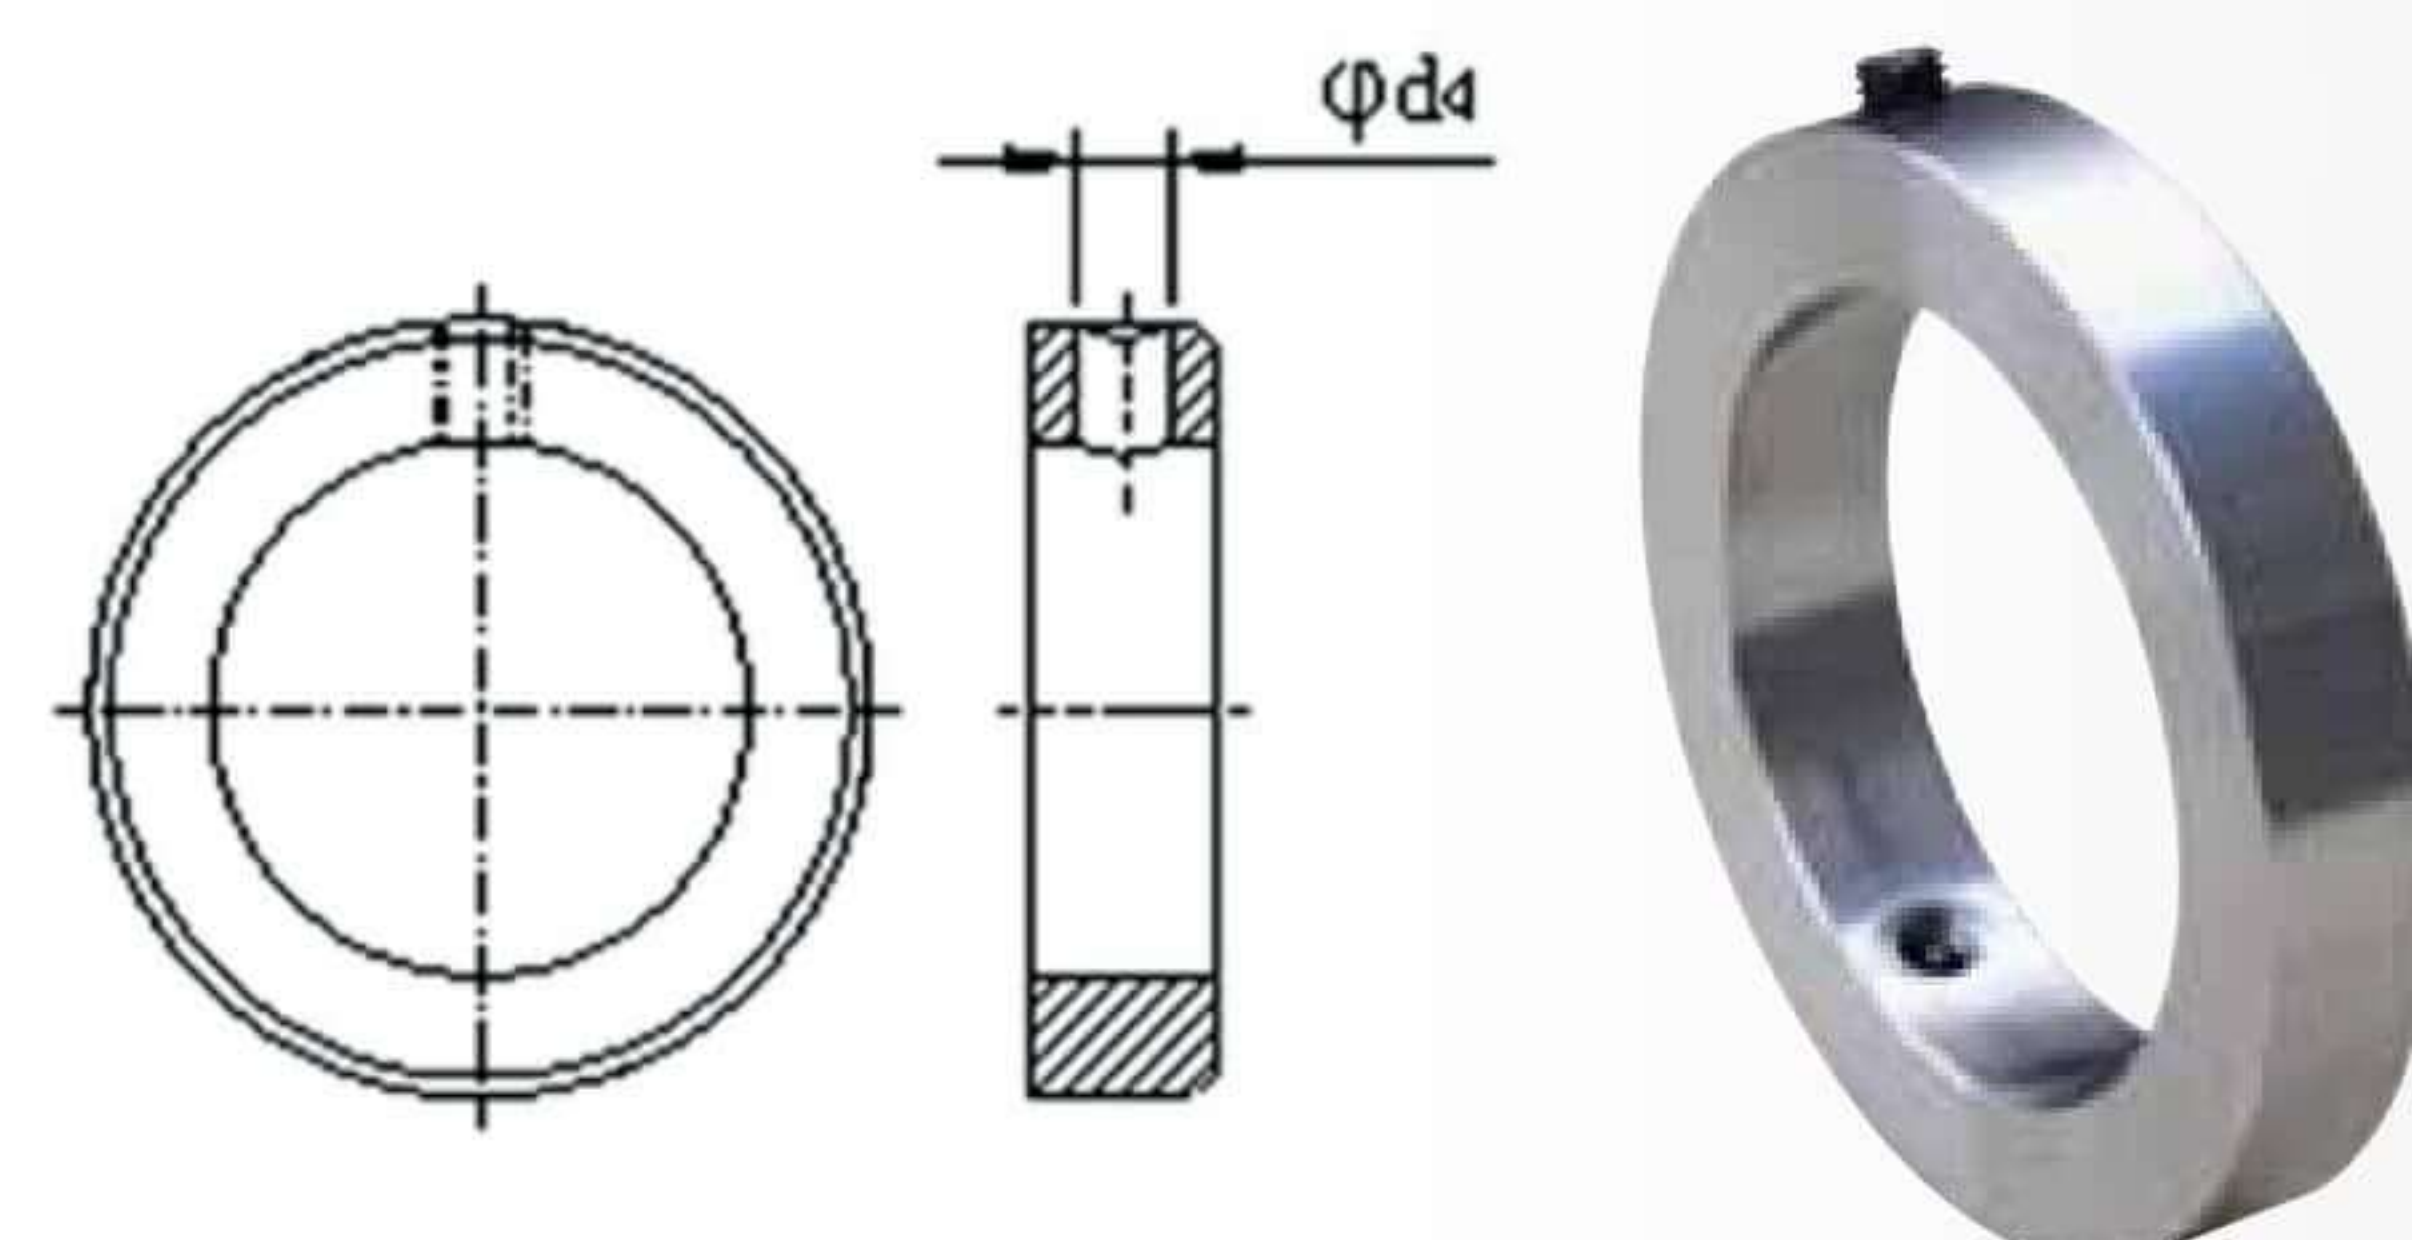


FORM B

Products Id			Dimension and Tolerance				BOX	Weight
FORM B			d1 H8	b js14	d2 h13	d4 H11		
PLAIN	ZINC	SS 304					Qty	(g)
01010 032	01011 032	01014 032	32	16	50	8	5	145.60
01010 035	01011 035	01014 035	35	16	56	8	5	188.51
01010 036	01011 036	01014 036	36	16	56	8	5	181.51
01010 040	01011 040	01014 040	40	18	63	8	5	262.90
01010 045	01011 045	01014 045	45	18	70	8	5	319.06
01010 050	01011 050	01014 050	50	18	80	10	5	432.81
01010 055	01011 055	01014 055	55	18	80	10	5	374.55
01010 056	01011 056	01014 056	56	18	80	10	5	362.23
01010 060	01011 060	01014 060	60	20	90	10	5	554.89
01010 063	01011 063	01014 063	63	20	90	10	5	509.38
01010 065	01011 065	01014 065	65	20	100	10	5	712.10
01010 070	01011 070	01014 070	70	20	100	10	5	628.87
01010 075	01011 075	01014 075	75	22	110	10	5	878.26
01010 080	01011 080	01014 080	80	22	110	10	5	773.14
01010 085	01011 085	01014 085	85	22	125	12	5	1139.36
01010 090	01011 090	01014 090	90	22	125	12	5	1020.68
01010 100	01011 100	01014 100	100	25	140	12	5	1479.69
01010 110	01011 110	01014 110	110	25	160	12	5	2080.82
01010 120	01011 120	01014 120	120	25	160	12	5	1726.31
01010 125	01011 125	01014 125	125	28	180	16	5	2895.88
01010 140	01011 140	01014 140	140	28	200	16	5	3521.67
01010 150	01011 150	01014 150	150	28	200	16	5	3021.04
01010 160	01011 160	01014 160	160	32	220	–	5	4498.27
01010 180	01011 180	01014 180	180	32	250	–	5	5938.50
01010 200	01011 200	01014 200	200	32	280	–	5	7576.03

>> DIN 705 Form C Adjusting Rings --- 102 Series

Technology information:

1. Our company strictly as per the German standard DIN705 production
2. Material: mild steel; Surface treatment: plain, black oxide, zinc plated, yellow zinc plated.
3. Material: stainless steel(304); Surface treatment: plain, passivation.

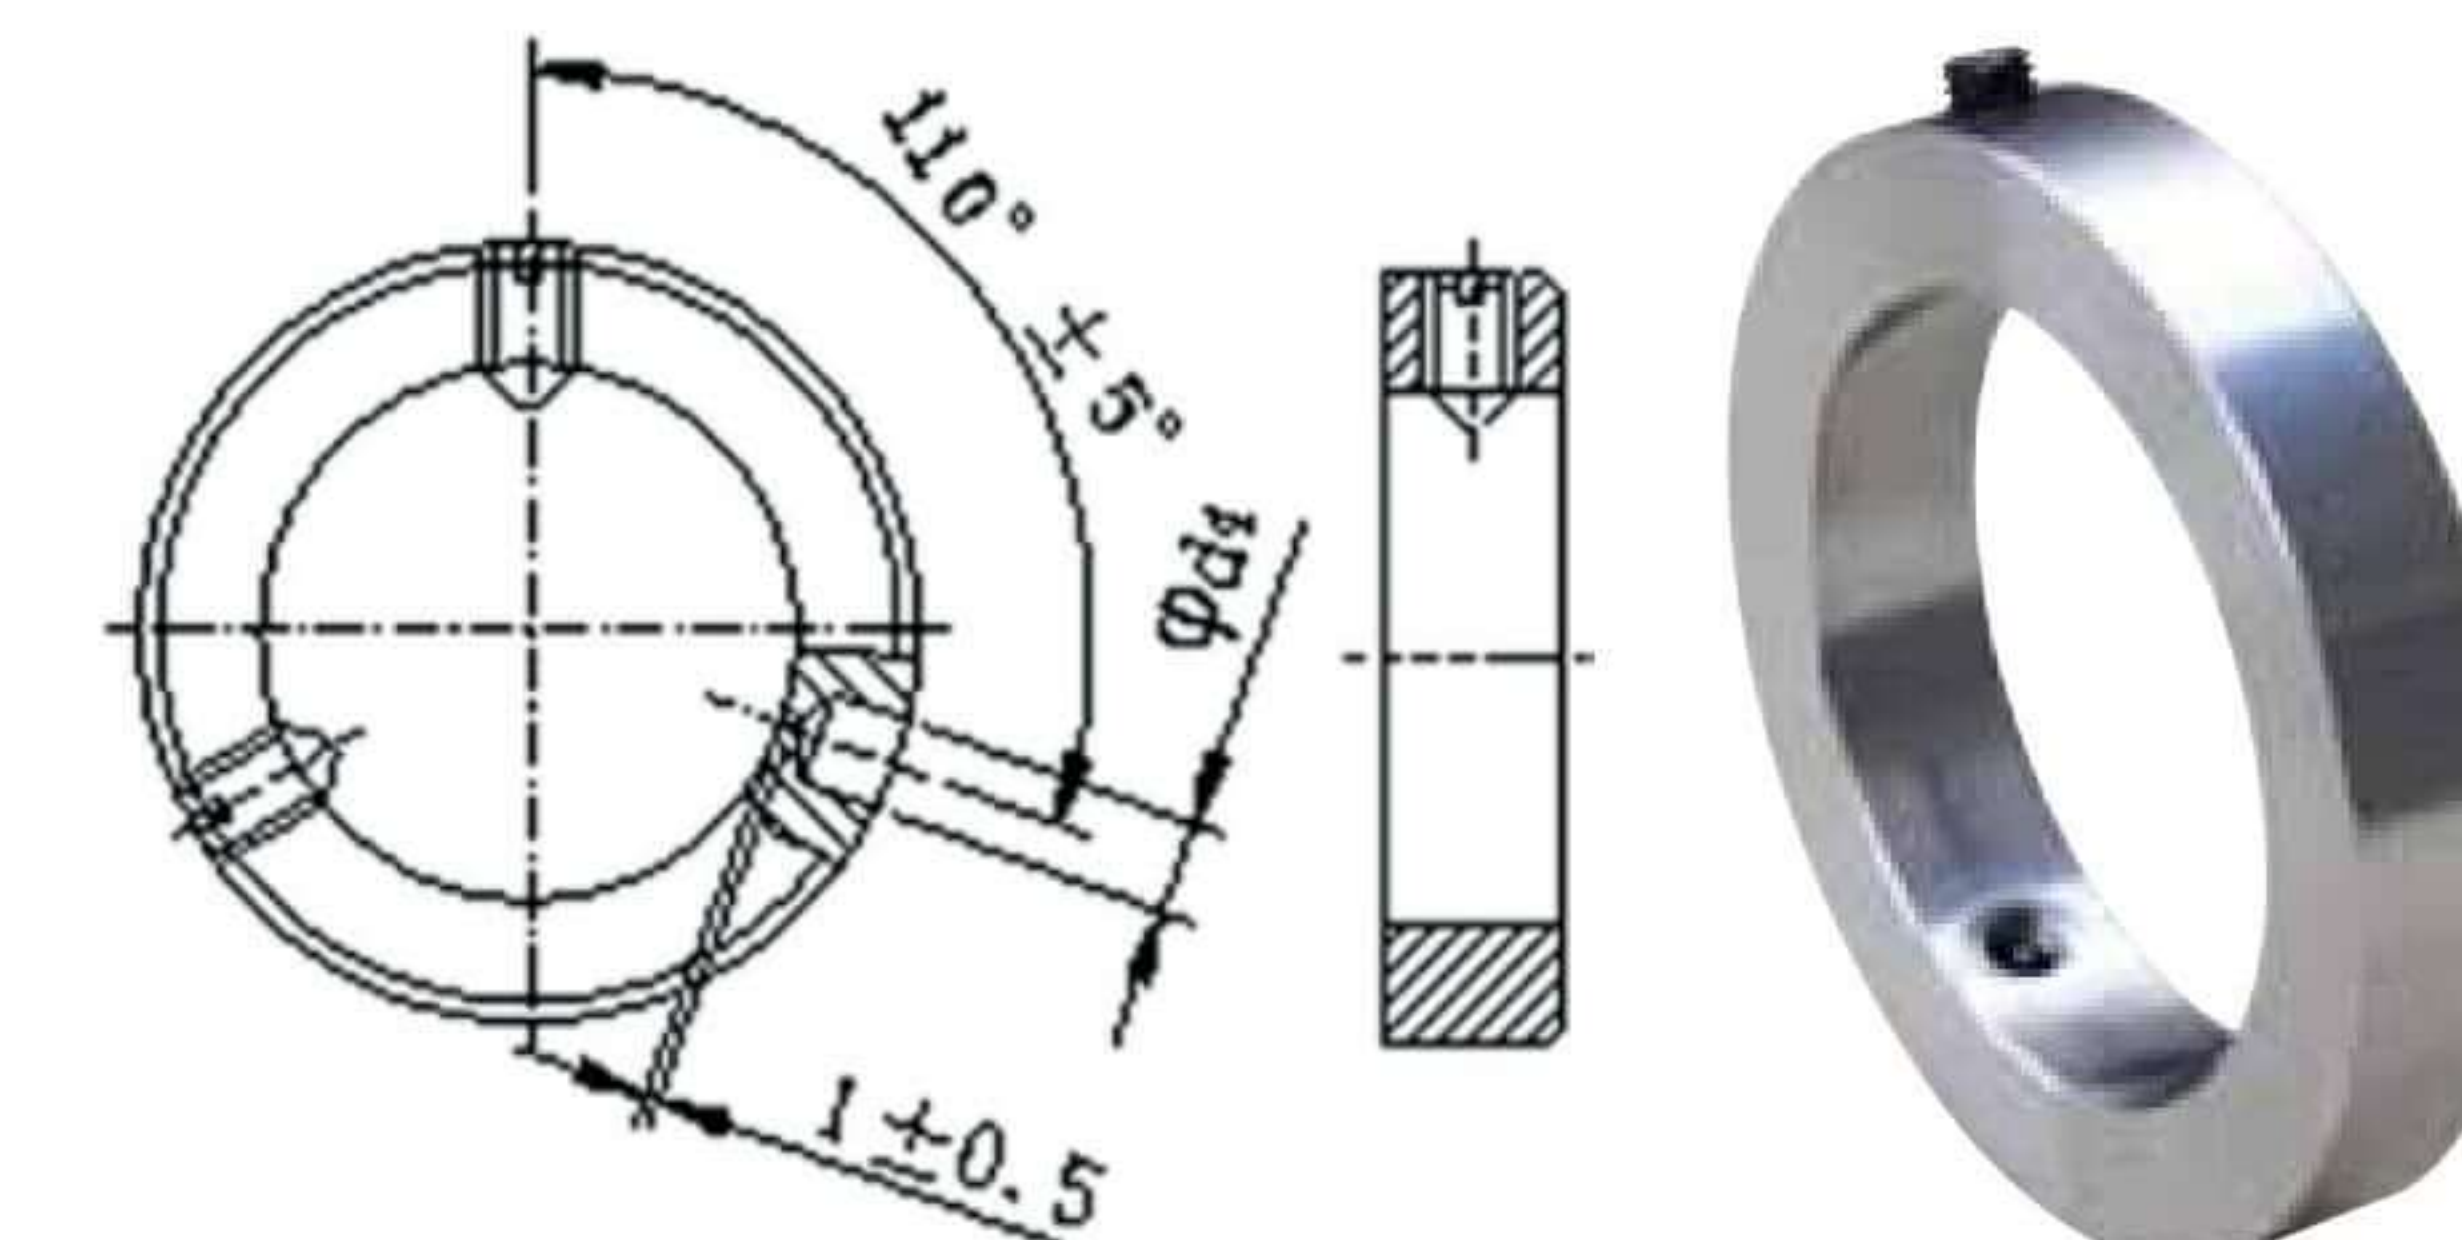

FORM C

The inner hole is not more than 70 millimeter with a cone end slotted set screws DIN553.


The inner hole is more than 70 millimeter with a cone end slotted set screws DIN914.

Products Id			Dimension and Tolerance							
FORM B			d1 H8	b js14	d2 h13	d3	d4 H11	Screw	BOX	Weight
PLAIN	ZINC	SS 304							Qty	(g)
01020 002	01021 002	01024 002	2	3.5	6	M 2	0,6	M 2 x 3	25	0.69
01020 902	01021 902	01024 902	2.5	4	7	M 2	0,8	M 2 x 3	25	1.05
01020 003	01021 003	01024 003	3	5	7	M 2	0,8	M 2 x 3	25	1.23
01020 903	01021 903	01024 903	3.5	5	8	M 2,5	1	M 2,5 x 3	25	1.60
01020 004	01021 004	01024 004	4	5	8	M 2,5	1	M 2,5 x 3	25	1.48
01020 904	01021 904	01024 904	4.5	6	10	M 3	1,5	M 3 x 4	25	2.95
01020 005	01021 005	01024 005	5	6	10	M 3	1,5	M 3 x 4	25	2.77
01020 905	01021 905	01024 905	5.5	6	12	M 4	1,5	M 4 x 5	25	4.21
01020 006	01021 006	01024 006	6	8	12	M 4	1,5	M 4 x 5	25	5.33
01020 007	01021 007	01024 007	7	8	12	M 4	1,5	M 4 x 5	25	4.69
01020 008	01021 008	01024 008	8	8	16	M 4	2	M 4 x 6	25	9.47
01020 010	01021 010	01024 010	10	10	20	M 5	3	M 5 x 8	25	18.50
01020 012	01021 012	01024 012	12	12	22	M 6	4	M 6 x 8	10	25.15
01020 014	01021 014	01024 014	14	12	25	M 6	4	M 6 x 8	10	31.74
01020 015	01021 015	01024 015	15	12	25	M 6	4	M 6 x 8	10	29.59
01020 016	01021 016	01024 016	16	12	28	M 6	4	M 6 x 8	10	39.06
01020 018	01021 018	01024 018	18	14	32	M 6	5	M 6 x 8	10	60.42
01020 020	01021 020	01024 020	20	14	32	M 6	5	M 6 x 8	10	53.86
01020 022	01021 022	01024 022	22	14	36	M 6	5	M 6 x 10	10	70.09
01020 024	01021 024	01024 024	24	16	40	M 8	6	M 8 x 12	10	101.01
01020 025	01021 025	01024 025	25	16	40	M 8	6	M 8 x 10	10	96.18
01020 026	01021 026	01024 026	26	16	40	M 8	6	M 8 x 10	10	91.15
01020 028	01021 028	01024 028	28	16	45	M 8	6	M 8 x 12	10	122.42
01020 030	01021 030	01024 030	30	16	45	M 8	6	M 8 x 10	10	110.98

>> DIN 705 Form C Adjusting Rings --- 102 Series

Technology information:
1. Our company strictly as per the German standard DIN705 production
2. Material: mild steel; Surface treatment: plain, black oxide, zinc plated, yellow zinc plated.
3. Material: stainless steel(304); Surface treatment: plain, passivation.


The inner hole is not more than 70 millimeter with a cone end slotted set screws DIN553.
The inner hole is more than 70 millimeter with a cone end slotted set screws DIN914.

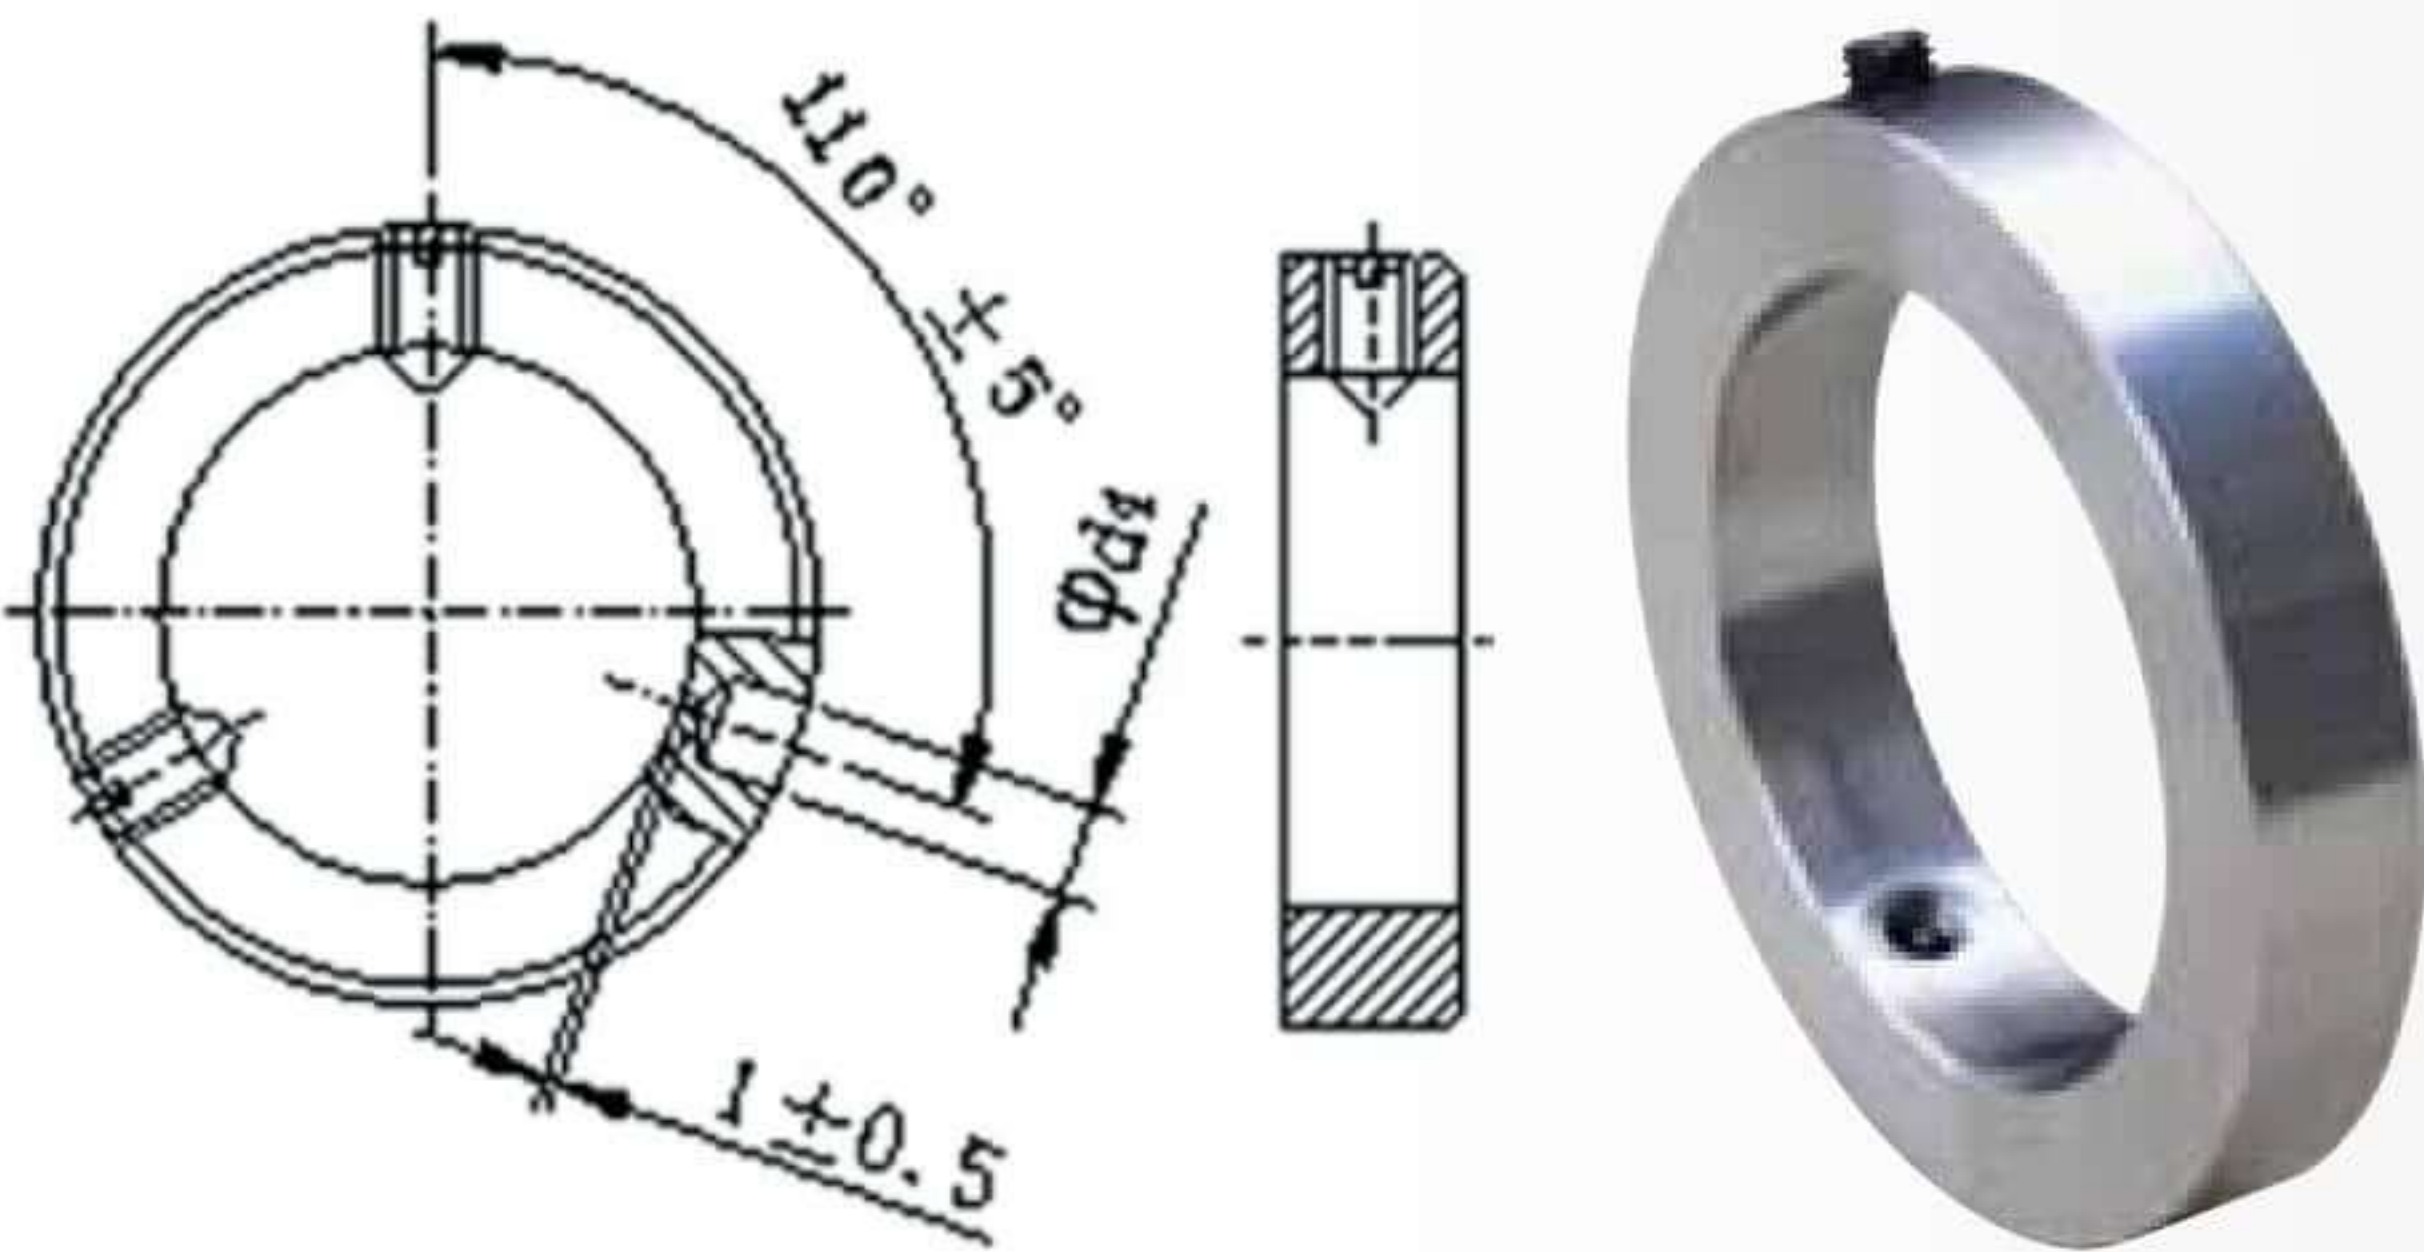

FORM C

Products Id			Dimension and Tolerance							
FORM B			d1 H8	b js14	d2 h13	d3	d4 H11	Screw	BOX	Weight
PLAIN	ZINC	SS 304							Qty	(g)
01020 032	01021 032	01024 032	32	16	50	M 8	8	M 8 x 12	5	145.60
01020 035	01021 035	01024 035	35	16	56	M 8	8	M 8 x 12	5	188.51
01020 036	01021 036	01024 036	36	16	56	M 8	8	M 8 x 12	5	181.51
01020 040	01021 040	01024 040	40	18	63	M 10	8	M 10 x 16	5	262.90
01020 045	01021 045	01024 045	45	18	70	M 10	8	M 10 x 16	5	319.06
01020 050	01021 050	01024 050	50	18	80	M 10	10	M 10 x 16	5	432.81
01020 055	01021 055	01024 055	55	18	80	M 10	10	M 10 x 16	5	374.55
01020 056	01021 056	01024 056	56	18	80	M 10	10	M 10 x 16	5	362.23
01020 060	01021 060	01024 060	60	20	90	M 10	10	M 10 x 16	5	554.89
01020 063	01021 063	01024 063	63	20	90	M 10	10	M 10 x 16	5	509.38
01020 065	01021 065	01024 065	65	20	100	M 10	10	M 10 x 20	5	712.10
01020 070	01021 070	01024 070	70	20	100	M 10	10	M 10 x 20	5	628.87
01020 075	01021 075	01024 075	75	22	110	M 12	10	M 12 x 20	5	878.26
01020 080	01021 080	01024 080	80	22	110	M 12	10	M 12 x 20	5	773.14
01020 085	01021 085	01024 085	85	22	125	M 12	12	M 12 x 25	5	1139.36
01020 090	01021 090	01024 090	90	22	125	M 12	12	M 12 x 20	5	1020.68
01020 100	01021 100	01024 100	100	25	140	M 12	12	M 12 x 25	5	1479.69
01020 110	01021 110	01024 110	110	25	160	M 12	12	M 12 x 30	5	2080.82
01020 120	01021 120	01024 120	120	25	160	M 12	12	M 12 x 25	5	1726.31
01020 125	01021 125	01024 125	125	28	180	M 16	16	M 16 x 35	5	2895.88
01020 140	01021 140	01024 140	140	28	200	M 16	16	M 16 x 35	5	3521.67
01020 150	01021 150	01024 150	150	28	200	M 16	16	M 16 x 30	5	3021.04
01020 160	01021 160	01024 160	160	32	220	M 20	–	M 20 x 35	5	4498.27
01020 180	01021 180	01024 180	180	32	250	M 20	–	M 20 x 40	5	5938.50
01020 200	01021 200	01024 200	200	32	280	M 20	–	M 20 x 45	5	7576.03

>> Inch Rigid Set Screw Couplings/ Keyway --- 205 Series

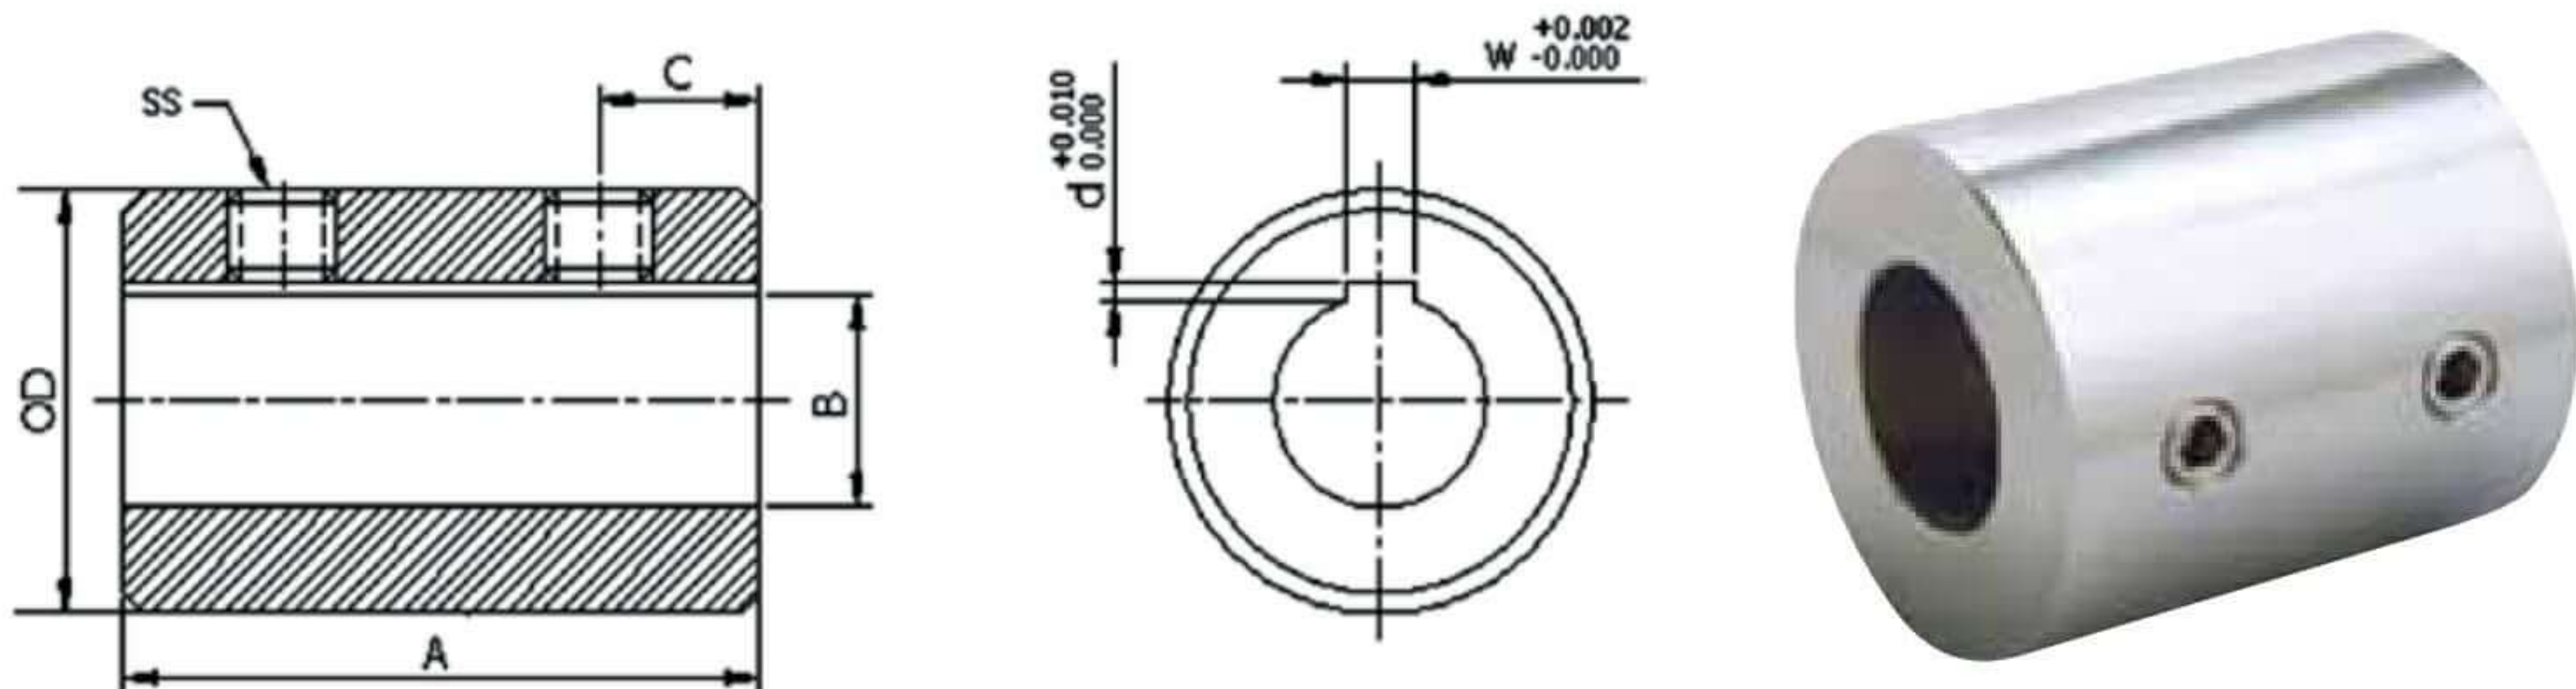

Products Id		Dimension and Tolerance					
Black Oxide Steel		B	A	OD	SS	C	
No Keyway	With Keyway						
02051 010	02051 011	0.251/0.253	3/4	1/2	10-32x3/16	3/16	+/-0.010
02051 020	02051 021	0.3135/0.3155	1	5/8	10-32x3/16	1/4	
02051 030	02051 031	0.376/0.378	1	3/4	1/4-20x3/16	1/4	
02051 040	02051 041	0.501/0.503	1-1/2	1	1/4-20x1/4	3/8	
02051 050	02051 051	0.626/0.628	2	1-1/4	5/16-18x5/16	1/2	
02051 060	02051 061	0.751/0.753	2	1-1/2	5/16-18x3/8	1/2	
02051 070	02051 071	0.876/0.878	2	1-3/4	3/8-16x3/8	1/2	
02051 080	02051 081	1.001/1.003	3	2	3/8-16x3/8	3/4	
02051 090	02051 091	1.251/1.253	4	2-1/4	3/8-16x3/8	1	
02051 100	02051 101	1.376/1.378	4-1/2	2-1/2	3/8-16x3/8	1	
02051 110	02051 111	1.501/1.503	4-1/2	2-1/2	3/8-16x3/8	1	