





S-Flex Coupling

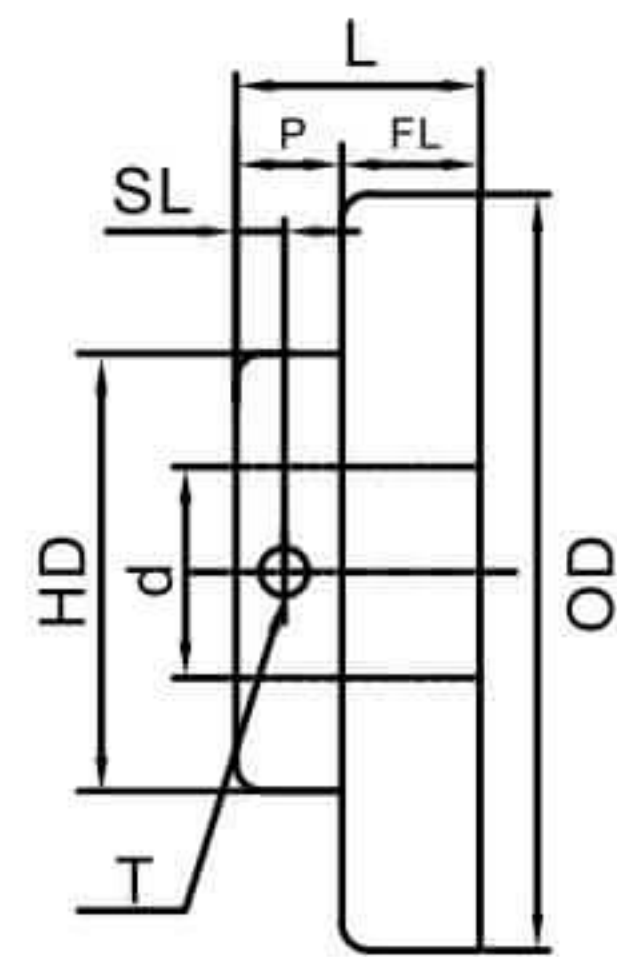

Type J

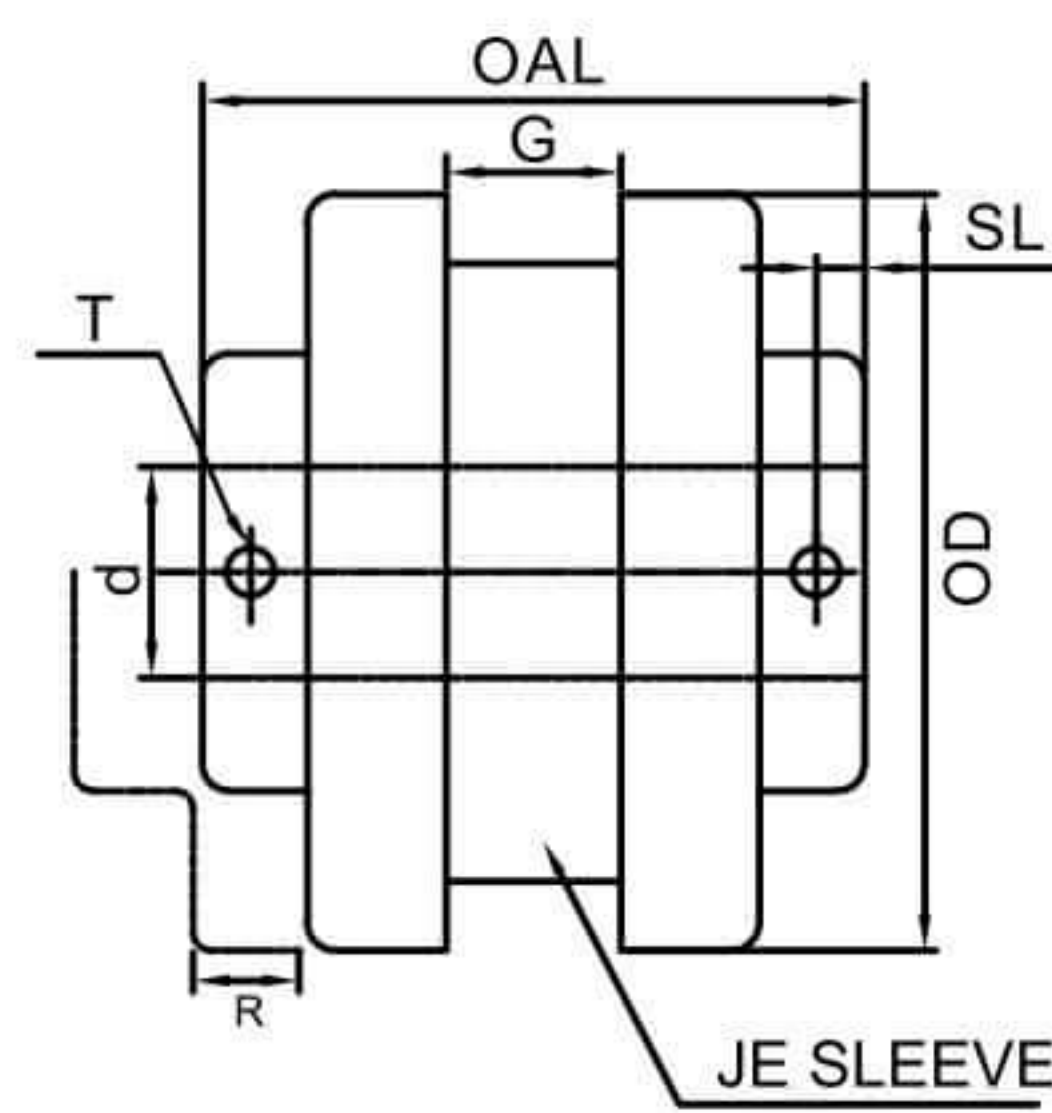

Type S

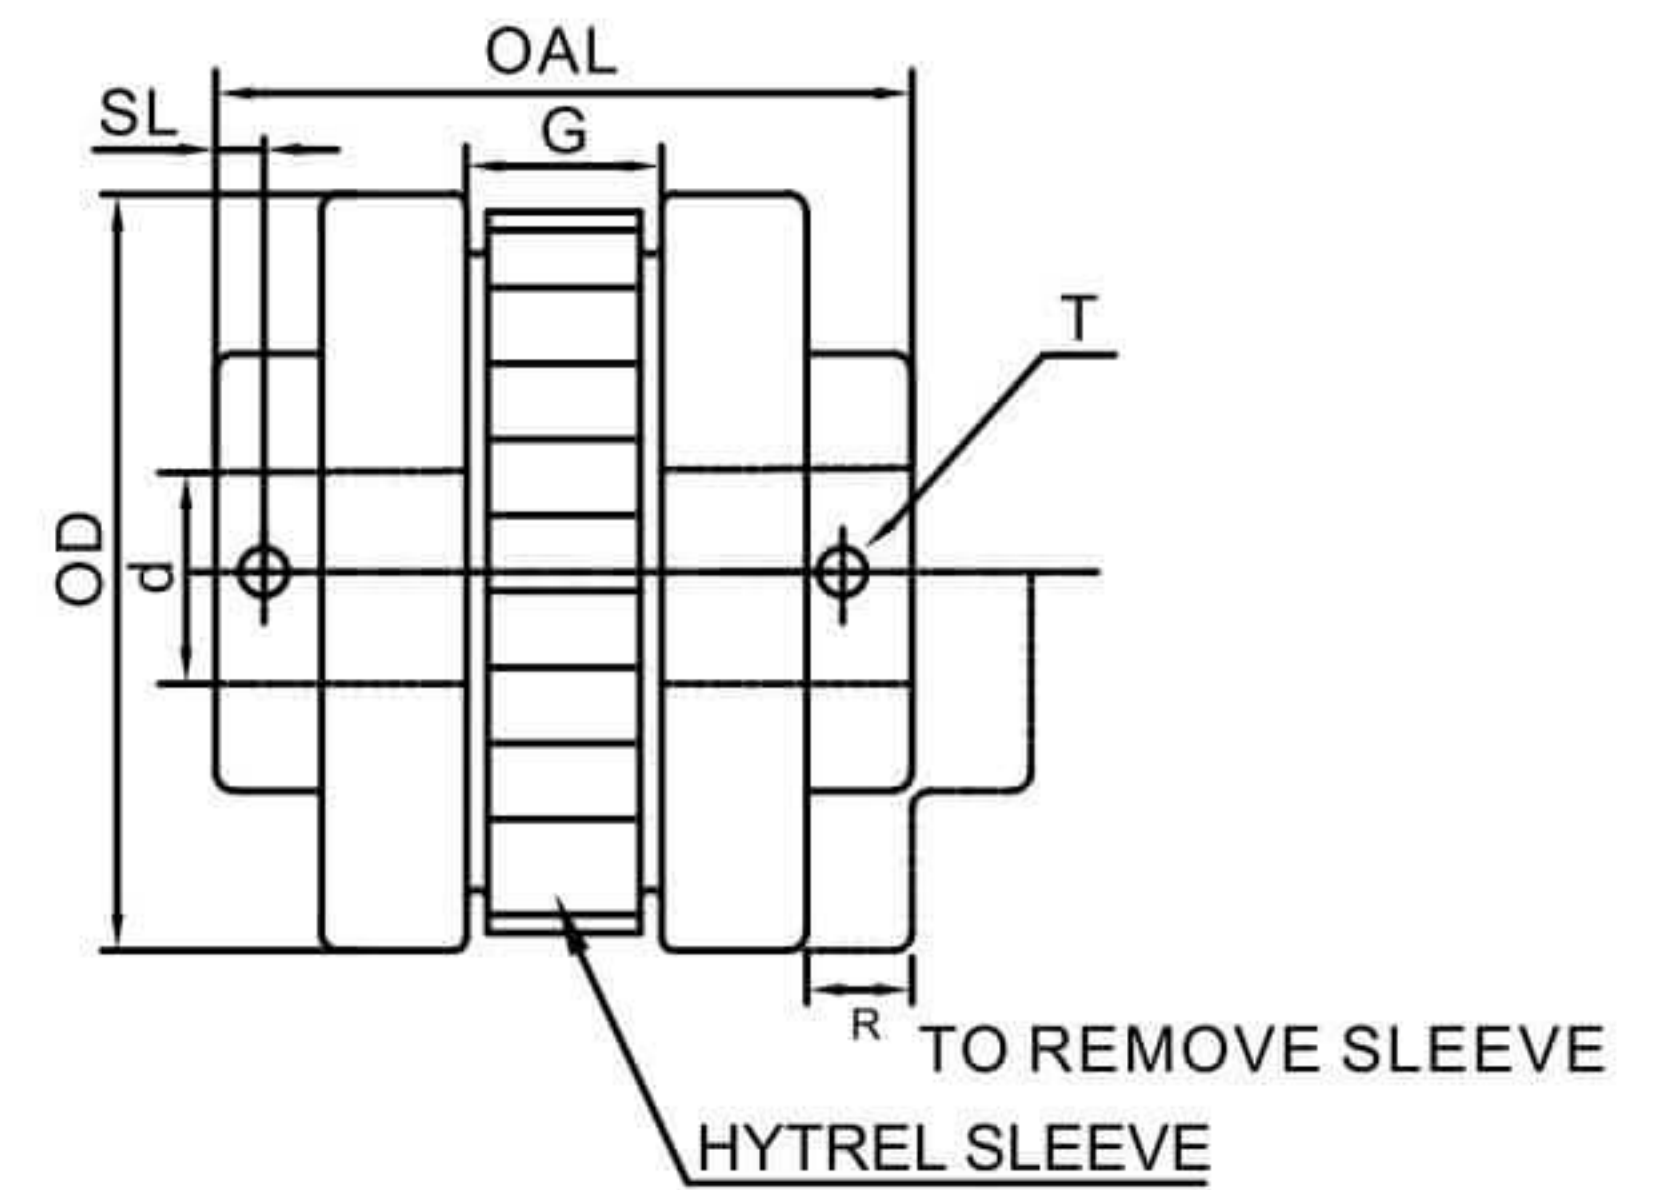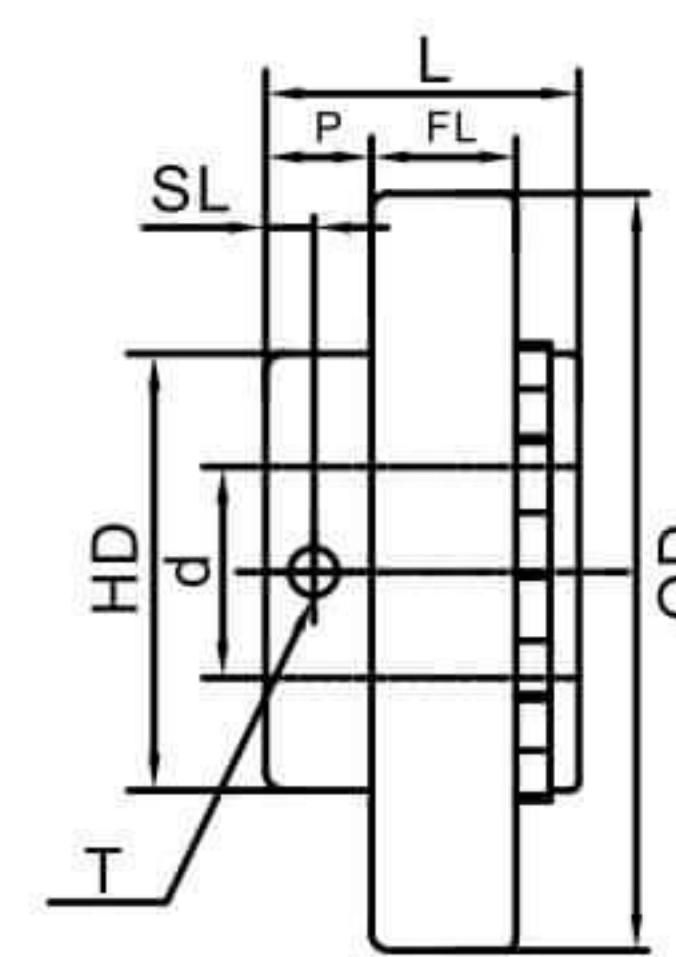

Size	d	L	FL	P	SL	OD	T	HD	OAL	G	R
	Std Keyway										
3J	0-22.23	20.82	9.65	11.17	6.35	52.37	1/4-20	38.1	52.81	11.17	14.22
4J	0-25.4	22.34	11.17	11.17	6.35	62.48	1/4-20	41.4	60.68	16	19.05
5J	0-28.58	26.91	14.98	11.93	7.36	82.55	1/4-20	47.75	72.87	19.05	24.63
6J	0-34.93	33.27	19.81	13.46	7.36	101.6	5/16-18	63.5	88.9	22.35	27.68
5S	0-30.17	34.03	14.98	11.43	7.36	82.55	1/4-20	47.75	71.87	19.05	24.63
6S	0-36.53	41.65	19.81	13.46	7.36	101.6	5/16-18	63.5	88.81	22.35	27.68
7S	0-41.28	46.73	19.81	17.52	8.89	117.47	3/8-16	71.37	100.06	25.4	33.27
8S	0-49.23	53.34	22.35	19.05	9.65	138.43	3/8-16	82.55	111.5	28.7	38.1
	0-49.23	49.27	22.35	26.16	-	138.43	-	82.55	125.72	28.7	38.1
9S	0-60.33	61.21	26.16	19.81	10.41	161.29	1/2-13	92.2	128.51	36.57	44.45
	0-73.03	57.91	26.16	31.75	-	161.29	-	104.9	152.39	36.57	44.45
10S	0-69.85	68.58	30.98	20.57	10.41	190.5	1/2-13	111.25	144.5	41.4	50.8
	0-85.73	68.58	30.98	20.57	-	190.5	-	120.65	144.5	41.4	50.8
11S	0-85.73	87.37	38.1	28.7	14.22	219.07	1/2-13	133.35	181.35	47.75	60.45
	0-98.4	77.72	38.1	39.62	-	219.07	-	143	203.19	47.75	60.45
12S	0-73.03	101.6	42.96	32.51	16	254	1/2-13	123.95	209.61	58.67	68.32
	0-98.43	101.6	42.96	32.51	-	254	-	146.05	209.61	58.67	68.32