

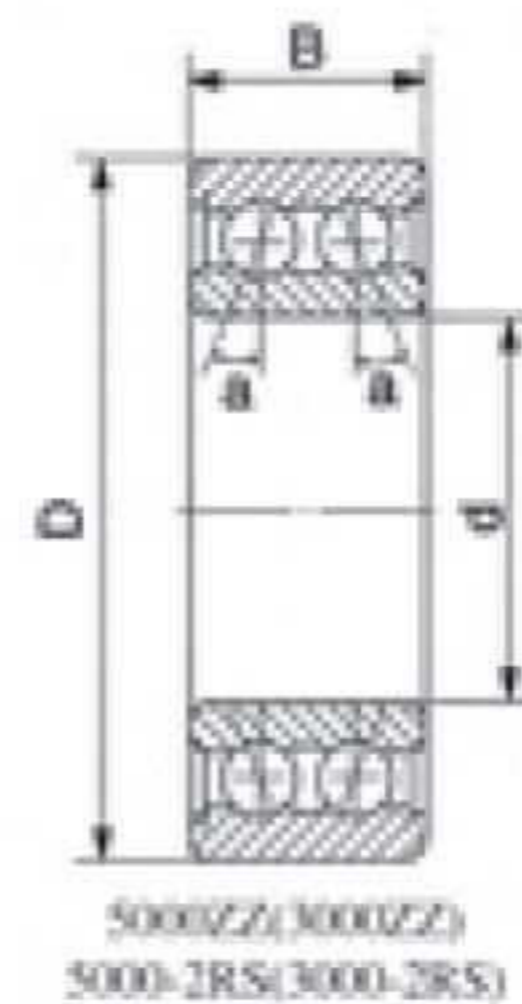


Double row deep groove ball bearings

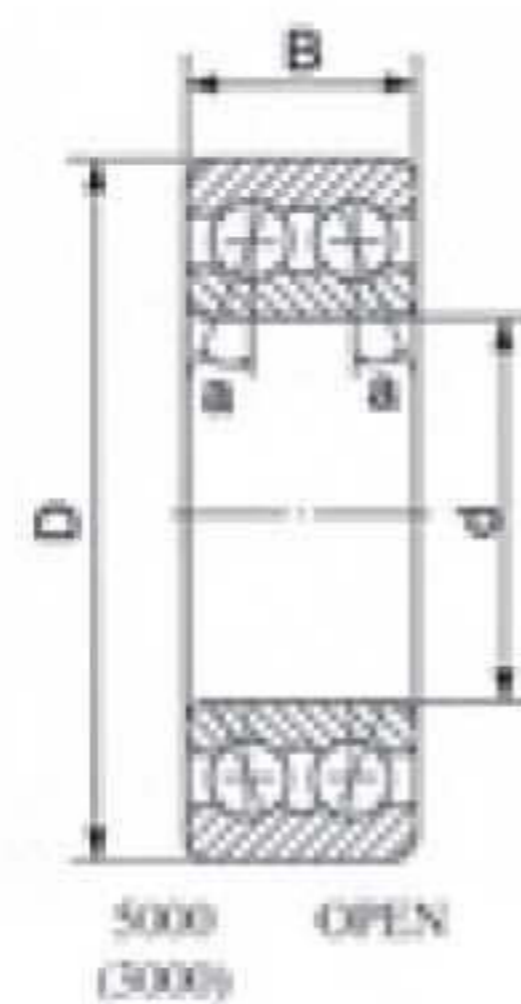

Bearing No.	Boundary Dimensions (mm)				Basic Load Rating(KN)		Limiting Speed		Weight
					Dynamic	Static	Grease	Oil	Kg(pc)
	d	D	B	r (min.)	Cr	Cor	r/min	r/min	
5200	10	30	14.3	0.6	6.95	3.80	14000	19000	0.049
5201	12	32	15.9	0.6	9.15	5.05	13000	17000	0.057
5202	15	35	15.9	0.6	10.0	6.05	11000	15000	0.064
5203	17	40	17.5	0.6	12.80	7.90	9900	13000	0.096
5204	20	47	20.6	1.0	19.00	12.10	8800	12000	0.153
5205	25	52	20.6	1.0	20.60	14.30	7300	9800	0.175
5206	30	62	23.8	1.0	28.60	20.40	6300	8400	0.286
5207	35	72	27.0	1.1	38.00	27.80	5500	7400	0.436
5208	40	80	30.2	1.1	42.50	32.50	4900	6600	0.590
5209	45	85	30.2	1.1	48.00	37.00	4400	5900	0.640
5210	50	90	30.2	1.1	51.00	42.00	4000	5300	0.689
5211	55	100	33.3	1.5	63.00	53.00	3600	4900	0.986
5212	60	110	36.5	1.5	71.50	58.50	3400	4500	1.27
5213	70	125	39.7	1.5	90.50	79.50	2900	3900	1.80
5215	75	130	41.3	1.5	90.00	80.50	2700	3600	1.90
5302	15	42	19	1.0	17.20	10.10	9900	13000	0.132
5303	17	47	22.2	1.0	20.40	12.10	9000	12000	0.181
5304	20	52	22.2	1.1	20.60	12.70	8000	11000	0.127
5305	25	62	25.4	1.1	30.50	20.50	6700	8900	0.362
5306	30	72	30.2	1.1	39.50	27.50	5700	7600	0.553
5307	35	80	34.9	1.5	49.50	35.00	5000	6600	0.776
5308	40	90	36.5	1.5	60.50	44.00	4400	5900	1.01
5309	45	100	39.7	1.5	72.50	54.00	4000	5300	1.340
5310	50	110	44.4	2.0	85.50	64.50	3600	4800	1.81

Double row deep groove ball bearings

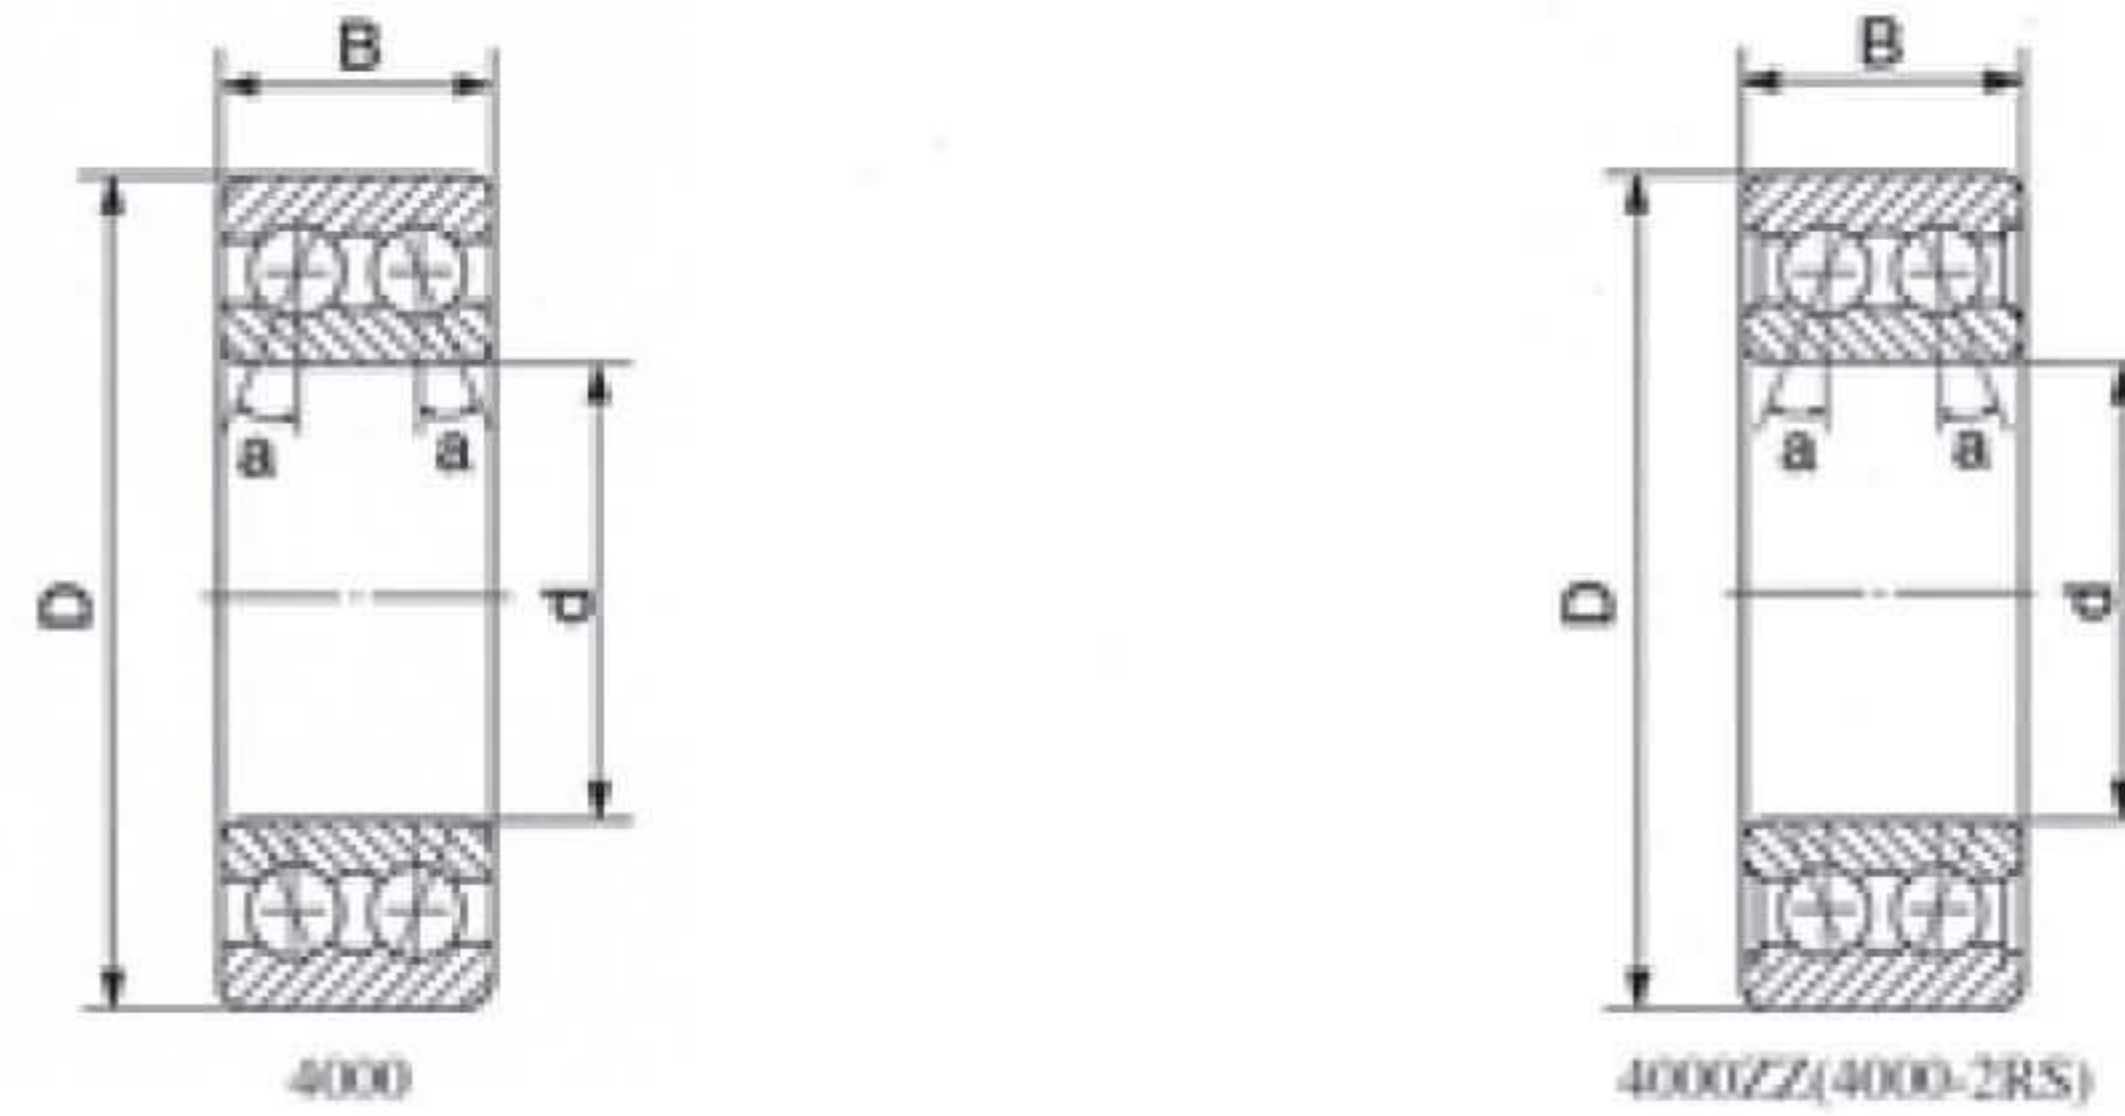

Bearing No.	Boundary Dimensions (mm)				Basic Load Rating(KN)		Limiting Speed		Weight Kg(pc)
					Dynamic Cr	Static Cor	Grease r/min	Oil r/min	
	d	D	B	r (min.)					
4200	10	30	14	0.6	7.7	5.9	15000	20000	0.057
4201	12	32	14	0.6	7.75	6.15	14000	18000	0.062
4202	15	35	14	0.6	9.75	9	12000	16000	0.071
4203	17	40	16	0.6	11.7	10.4	11000	14000	0.106
4204	20	47	18	1	16.4	16	9000	12000	0.165
4205	25	52	18	1	16.3	16.9	7500	9900	0.189
4206	30	62	20	1	22	24.7	6400	8500	0.298
4207	35	72	23	1.1	26.4	30.7	5600	7400	0.46
4208	40	80	23	1.1	33.7	42.4	4700	6300	0.558
4209	45	85	23	1.1	31.9	43.9	4600	6100	0.605
4210	50	90	23	1.1	31.4	44.6	4200	5600	0.651
4211	55	100	25	1.5	37.2	54.1	3800	5000	0.882
4212	60	110	28	1.5	47.9	67.6	3500	4700	1.2
4213	65	120	31	1.5	54.7	78.5	3200	4300	1.59
4214	70	125	31	1.5	62.1	89.8	3100	4100	1.68
4215	75	130	31	1.5	61.6	90.7	2900	3900	1.77
4302	15	42	17	1	13.1	11.7	11000	14000	0.123
4303	17	47	19	1	16.5	15	9400	13000	0.171
4304	20	52	21	1.1	19.5	17	8300	11000	0.227
4305	25	62	24	1.1	26.3	25.7	6700	9000	0.365
4306	30	72	27	1.1	35.5	35.9	5700	7600	0.542
4307	35	80	31	1.5	40.6	41.8	5200	7000	0.752
4308	40	90	33	1.5	46	48.8	4600	6100	1.01
4309	45	100	36	1.5	57.6	62.4	4100	5500	1.35
4310	50	110	40	2	70.4	77.7	3700	5000	1.8
4311	55	120	43	2	84.2	94.4	3400	4600	2.29
4312	60	130	46	2.1	99.2	113	3100	4200	2.87
4313	65	140	48	2.1	107	124	2900	3900	3.46
4314	70	150	51	2.1	115	136	2700	3600	4.21
4315	75	160	55	2.1	132	158	2500	3400	5.15